



STATE OF THE STREETS REPORT 2018

TABLE OF CONTENTS

PURPOSE / BACKGROUND	1
PAVEMENT MANAGEMENT SYSTEM	2
PHASE I (FIELD DATA COLLECTION)	2
PHASE II (DATA ANALYSIS & SCORING)	2
PHASE III (PROJECT & TREATMENT SELECTIONS)	2
PAVEMENT CONDITION INDEX (PCI) SCORES	3
REMAINING SERVICE LIFE (RSL)	4
FUNCTIONAL CLASSIFICATIONS	4
CURRENT PAVEMENT CONDITIONS	5
NETWORK TRENDS	6
PAVEMENT PRESERVATION STRATEGIES	8
ELEMENTS OF PAVEMENT PRESERVATION	10
BUDGET NEEDS CALCULATION	11
BUDGET SCENARIOS	13
SCENARIO 1: UNFUNDED (NO BUDGET)	14
SCENARIO 2: \$1.8 MILLION ANNUAL BUDGET	16
SCENARIO 3: MAINTAIN CURRENT PCI	18
SCENARIO 4: UNCONSTRAINED BUDGET	20
SCENARIO COMPARISON	22
ROAD REHABILITATION HISTORY	23
2018 ROADWAY IMPROVEMENTS	25
PAVEMENT CONDITION INDEX SCORES	29
2018 PAVEMENT RATING MAP	A-1
ESTIMATED REMAINING SERVICE LIFE MAP	A-2

<u>FUNCTIONAL CLASSIFICATION MAP</u>	A-3
<u>ROAD MAINTENANCE HISTORY MAP</u>	A-4
<u>NEW ROAD HISTORY MAP</u>	A-5
<u>ROADWAY DEFECT DEFINITIONS</u>	89
ENTIRE NETWORK (ALPHABETICAL LISTING)	31
ARTERIALS AND COLLECTORS (BY PCI SCORE)	90
RESIDENTIAL STREETS (BY PCI SCORE)	67
<u>ROADWAY DEFECT DEFINITIONS</u>	89
RUTTING & WEAR	89
ALLIGATOR CRACKING	90
LONGITUDINAL & TRANSVERSE CRACKING	91
WEATHERING	92
RAVELING	93
PATCHING	94
DEPRESSIONS & DISTORTIONS	95
<u>GLOSSARY OF COMMON TERMS</u>	96

On the cover: Roundabout at Hogum Bay Rd & Willamette Dr

PURPOSE / BACKGROUND

Every year the City of Lacey collects pavement condition data for its entire roadway network. Here's a summary of Lacey's streets:

- 31.7 centerline miles of arterial streets,
- 22.4 centerline miles of collector streets, and
- 112.1 centerline miles of residential (local) streets, for a total of
- 166.2 centerline miles of roadway within City limits.

All public roads are visually inspected for pavement surface defects. These defects are documented and tallied in the pavement management database. The purpose of this report is to put the raw data in a form that allows the City to determine the current status of these streets on a network level, as well as make intelligent pavement-related repair and funding decisions.

Having a pavement management program in place provides a valuable opportunity to evaluate pavement condition trends. By studying these trends we can estimate and propose future budgetary and maintenance requirements, prioritize projects to maximize cost-effectiveness, and evaluate past performance. This report includes several "what-if" scenarios generated by the pavement management software, which analyze how varying budget amounts will impact the City's roads over a period of time.

Phase I (Field Data Collection)

Every year all paved roads within City limits are visually inspected for various signs of defects and aging (see pages 89-97). These roads are divided into smaller, more manageable sections for the purpose of inspection. Sections are typically from intersection to intersection and approximately 1000-1500 feet long as easily identifiable intersections allow. Currently the roadway network is divided up into 1079 field inspection units. As each section is examined, all pavement defects, along with their measurements and severities, are documented.

Phase II (Data Analysis & Scoring)

Since 2005 Lacey has been using a software program called *StreetSaver*, which was developed by the Metropolitan Transportation Commission (MTC) in the San Francisco Bay area and is specifically targeted for use by local municipalities. As data is gathered for each section, any defects noted are entered into the *StreetSaver* program, which deducts points from the section based on the defect type, severity, and size. That value is then adjusted to account for the number of different defects present within that section. This adjusted score is the pavement condition index (PCI). PCI scores range from 0 to 100; a score of 100 would denote a perfect, new section of roadway, and values getting close to 0 would represent a completely failed section.

After calculating the PCI scores for all road sections, the software establishes the extent of repair required and estimates repair costs. *StreetSaver* also calculates projected PCI scores based on different budgeting scenarios. Each year's rating and maintenance information is stored in a database, giving us a more complete record of our network's condition, and keeping track of the extent and timing of road improvements.

Phase III (Project & Treatment Selections)

The output from the data analysis includes a prioritized rating of the roadway segments. The list allows the City to develop a strategy for project selection depending upon the budgeting resources available. Another factor is the optimal timing for a given road treatment, which will ideally provide the greatest improvement in benefit for the lowest cost ("most bang for the buck"), thus making the best use of limited funds. A properly maintained pavement management system will aid in the challenge of maintaining the desired level of service on "good" roads while repairing the "poor" ones.

Pavement Condition Index (PCI) Scores

The condition categories listed below are ranges in the PCI scale that compare similar sections of pavement and make generalized assumptions about their condition.

➤ **“VERY GOOD” (PCI Scores of 85 to 100)**

These streets may be relatively new. They have few, if any defects, and what defects they do have are likely cosmetic. Routine maintenance, such as crack sealing or a surface seal, may be enough to provide a smooth ride for many years to come.



➤ **“GOOD” (PCI Scores of 60 to 84)**

These are streets that are beginning to show their age, due to climate and traffic. Common defects include various forms of cracking and raveling. The defects are generally not serious in nature, but could indicate a need for additional maintenance or localized treatment, such as patching. Their base is still intact and can provide several more years of service.



➤ **“FAIR” (PCI Scores 40 of to 59)**

Defects, such as alligator cracking and depressions, have become more prevalent and more severe. Pavement edges may start to ravel away. These roads are functional, but require rehabilitation if they are to remain an asset in the future. Some structural deficiencies and surface roughness are evident.



➤ **“POOR” (PCI Scores of 0 to 39)**

In this category, the pavement is overshadowed by large areas of cracking and depressions. The surfaces are uneven and may be prone to rutting. Failures in both the pavement and subgrade are easy to identify. These sections are near the end of their services lives and usually require a complete road reconstruction.



Remaining Service Life (RSL)

Some of the essential functions of pavement management are to (1) keep track of pavement condition using ways to measure performance and (2) forecast future pavement performance in order to plan ahead for maintenance and rehabilitation. One of the main indicators for the above is assessing the remaining service life (RSL) of a pavement.

Pavement RSL is the estimated number of years that a pavement section adequately performs to a desired level of service, after which time the pavement is providing substandard service quality. This value is calculated using the distress data and the pavement's rate of deterioration.

RSL is a measure of the amount of pavement service life, not pavement life. Therefore, it's possible for a road section to have an RSL value of zero, which means that it has dropped below the threshold of the desired level of service.

Functional Classifications

Roadways are grouped into functional classes based on the kind of service they are expected to provide. Transportation planners use functional classification to design a safe and efficient flow of traffic throughout the street network. The most basic categories are arterials, collectors, and residential streets.

➤ **ARTERIAL STREETS**

This system of streets serves the major centers of urban activity and supports the highest traffic volumes. Its purpose is to move people and goods efficiently and quickly, with the highest level of access control.



➤ **COLLECTOR STREETS**

These streets collect traffic from residential (local) roads and connect them with arterials. Compared to arterial streets, collectors provide a level of service at a lower speed for shorter distances, maintaining a balance between mobility and access.



➤ **RESIDENTIAL STREETS**

The great majority of streets in the network are meant to provide the most access to residences and other properties but with a lower level of mobility. These generally interconnect with each other and to collector streets.




CURRENT PAVEMENT CONDITIONS

The City of Lacey currently maintains 166.2 centerline miles of asphalt pavement. The average PCI score for the entire street network is 83.8. The table below summarizes the lengths and PCI scores of the road network, as a whole and by functional class.

Network Summary Statistics

	Centerline Miles	Lane Miles	Management Sections	% of Entire Network	PCI (weighted by area)	RSL (weighted by area)
Arterial Streets	31.7	108.6	148	19.1%	81.7	21.9
Collector Streets	22.4	51.2	110	13.5%	82.7	19.8
Residential Streets	112.1	224.2	821	67.4%	85.1	30.2
Entire Network	166.2	384.0	1079	100.0%	83.8	26.5

Over 97% of all streets in Lacey were rated as being in “good” or “very good” condition. Condition categories are relatively unchanged since last year.

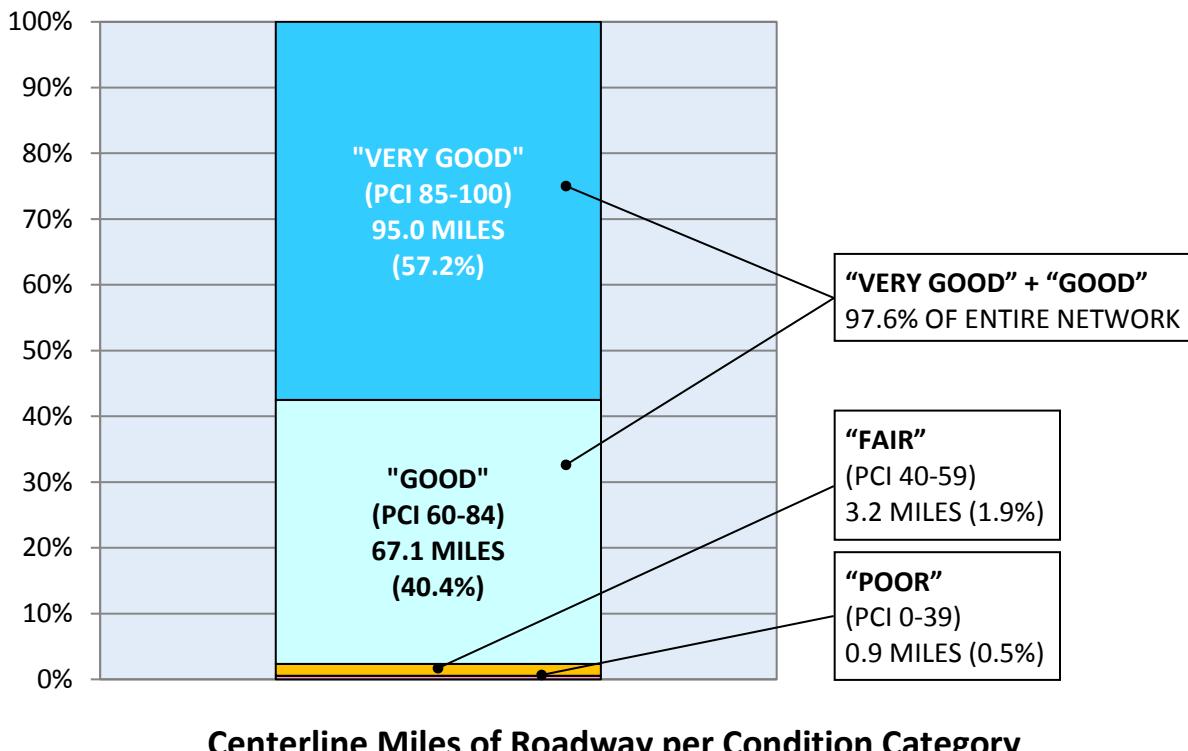

NETWORK TRENDS


Average Pavement Condition Index (PCI) Score




*Increase in PCI due to software update and revised definition of weathering and raveling.

The network Pavement Condition Index (PCI) score is determined from a weighted average based on section area. Recent neighborhood development (new streets), along with a history of road improvement projects, have helped to slow down the rate of pavement deterioration over the entire network.


Entire Street Network

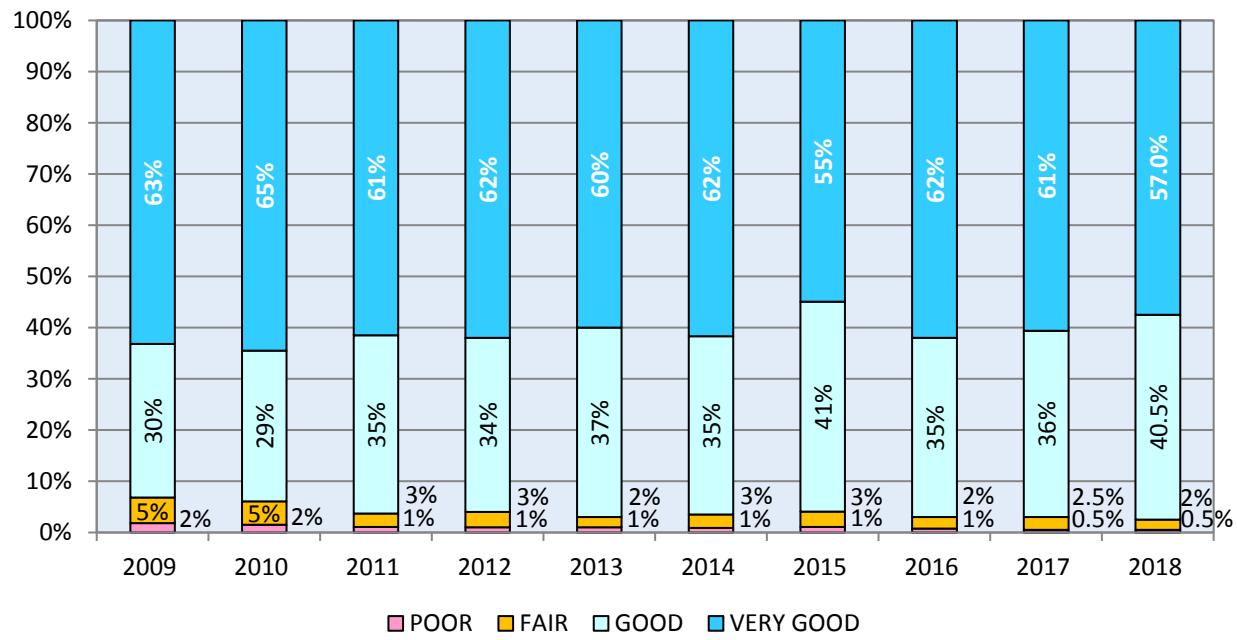

Arterial & Collector Streets

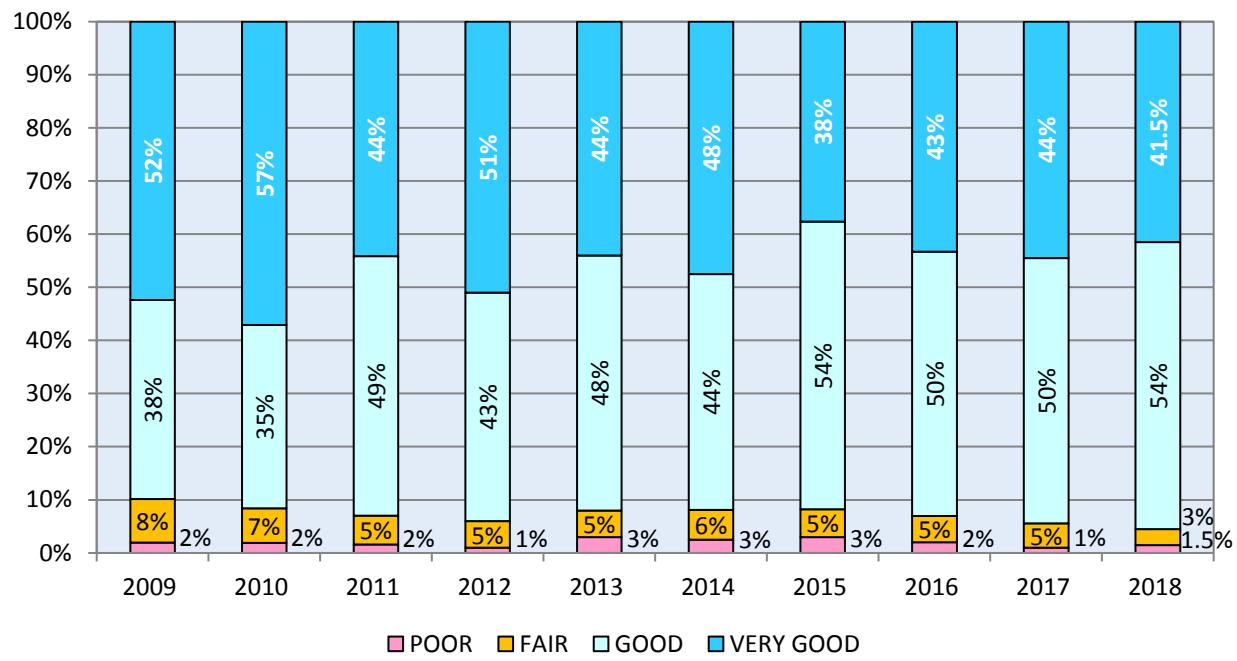

Residential Streets

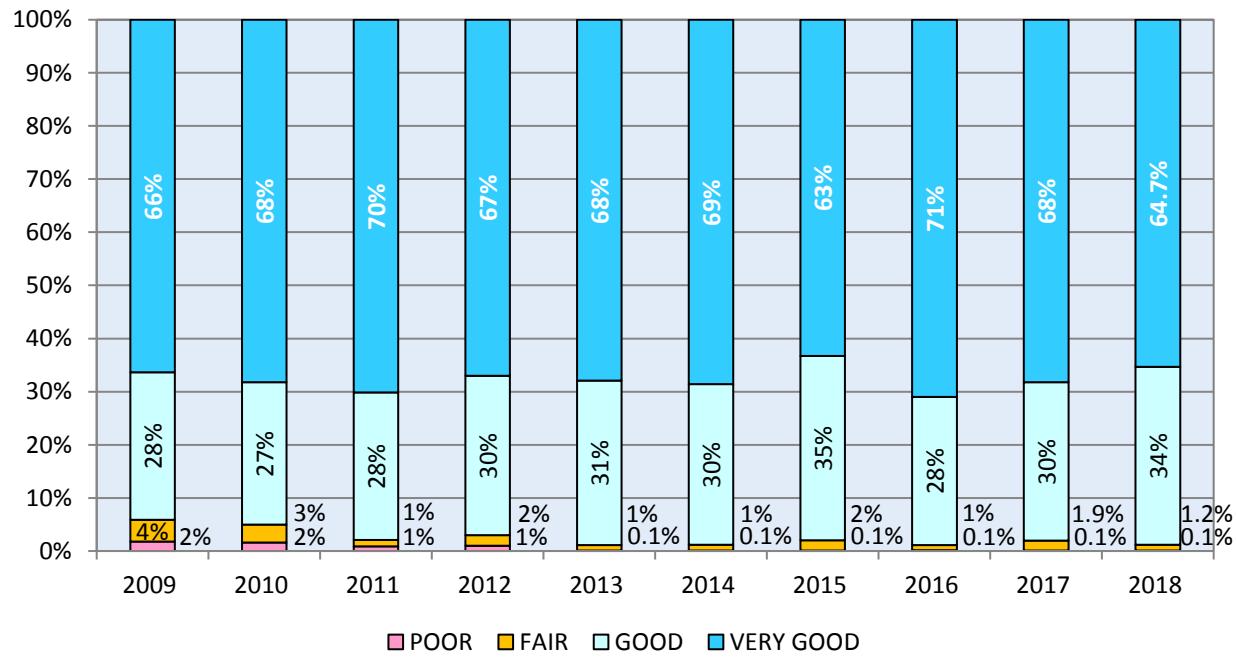

PAVEMENT PRESERVATION STRATEGIES -----

One of the key goals of pavement preservation is to prevent “very good” or “good” pavement from deteriorating. For roads with PCI scores in the 50s and 60s that are left unmaintained, pavement deteriorates at an accelerated rate. Road treatments for “fair” or “poor” streets are much more expensive, as it is often necessary to repair structural damage or even rebuild the road. The “worst-first” approach to pavement management is costly, time consuming, and disrupts traffic flow for extended periods of time.

The concept of pavement preservation relates to extending a pavement’s service life by carefully choosing surface treatments while the pavement is still in good condition. Various strategies for roadway treatment include:

➤ **Routine Maintenance:**

Scheduled, day-to-day activities (examples: crack sealing, repairing potholes, patches, maintaining channelization)

➤ **Preventive Maintenance:**

Series of low-cost treatments intended to reduce the rate of road deterioration and preserve the existing road system (examples: seal coats, thin asphalt overlay)


➤ **Rehabilitation/Reconstruction:**

Milling or removal of existing pavement, addressing subgrade problems, and constructing new asphalt structures

The success and cost-effectiveness of these treatments depend on choosing the optimal time to apply them, in order to get the greatest improvement possible for the lowest cost. By taking a proactive approach to maintaining our road network, we can provide the public with improved mobility and safer, smoother, longer-lasting pavements – and maximize the return on the City’s investment.

Effect of Treatments

Example: cost per square yard for a residential road over 55 years

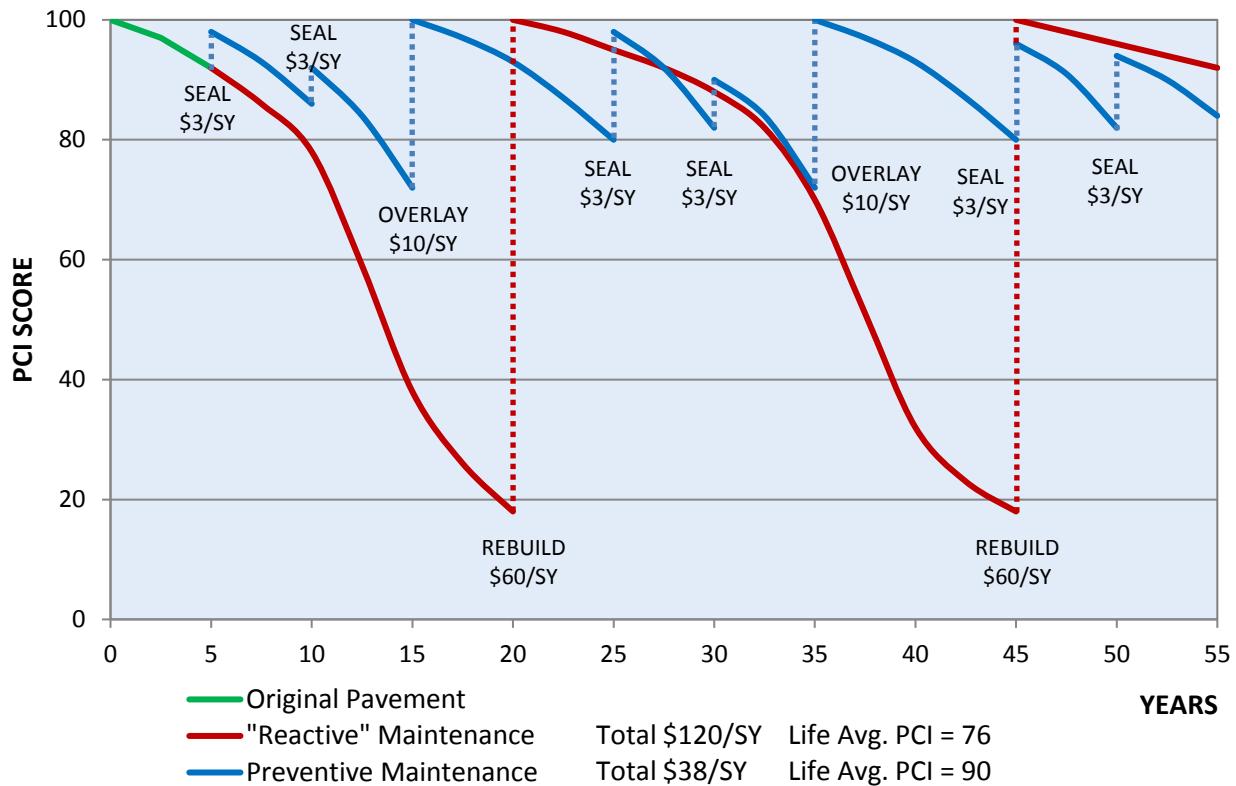

In the chart above, the red descending curves represent the “reactive” model of pavement treatment, in which roads deteriorate unchecked until they trigger major road rehabilitation. The blue curves illustrate the concept of pavement preservation, in which roads receive preventive maintenance regularly while still in good condition. Although prices for road treatments fluctuate and increase over time, the example serves to illustrate the obvious advantages to applying preventive maintenance.

Counting over the same period of time, the sum of the costs of preventive maintenance is substantially less than road reconstruction. This approach sustains a higher level of pavement performance and delays the need for rehabilitation. Benefits also include improved ride quality and safety, increased customer satisfaction, and reduced traffic congestion associated with major road repair.

Elements of Pavement Preservation

Treatment	Description	Expected Life of Treatment	Advantages	Disadvantages
Crack Seal	Localized treatment preventing water and debris from entering the road base and sub-base	3-5 years	<ul style="list-style-type: none"> • Low cost • Common, widely used • Effective 	<ul style="list-style-type: none"> • Short life span • Only addresses cracks • Possible reflective cracking later
Slurry Seal or Microsurfacing	Surface treatment of fine aggregate and asphalt emulsion. Makes a cold mixed material that cures quickly to a hard wearing surface	5-8 years	<ul style="list-style-type: none"> • Waterproofs and protects surface • Reduces pavement oxidation • Slows surface raveling • Adds surface friction • Improves ride and profile 	<ul style="list-style-type: none"> • Cure time dependent on weather conditions • Success dependent on experienced contractor and proper mix of ingredients
Chip Seal	Similar to slurry seal, with larger aggregate placed on top of asphalt binder	7-10 years	<ul style="list-style-type: none"> • Similar advantages as for slurry seals • More effective at sealing medium-severity cracking than other treatments 	<ul style="list-style-type: none"> • Aggregate can become dislodged • Associated with increased road noise and rougher surface
Cape Seal	Chip seal applied, with layer of slurry seal/microsurfacing on top	10-15 years	<ul style="list-style-type: none"> • Smoother ride than chip seal alone • Extended treatment life • Asphalt-like finish at lower cost 	<ul style="list-style-type: none"> • More expensive than other seals
Thin Hot-Mix Asphalt Overlay	Thin layer (up to 1.25") applied to road surface	10-12 years	<ul style="list-style-type: none"> • Works well in all climate conditions • Improves ride quality • Corrects surface irregularities 	<ul style="list-style-type: none"> • Provides no additional structural capacity • Subject to delamination and reflective cracking

BUDGET NEEDS CALCULATION

In order to run budget scenarios and ultimately develop an effective maintenance and rehabilitation strategy, the *StreetSaver* program first determines the maintenance “needs” of the roadway network. Because it costs less to maintain roads in good condition, *StreetSaver* calculates what it would take to improve the road system overall to an optimal PCI (upper 80s/lower 90s) and then maintain it at that level. In this analysis a budget was calculated for ten years based on current treatment selections and unit costs, using an inflation factor of 3%. For each management section, the program projects the condition with and without treatment, recommends one or more treatments over the analysis period, and estimates treatment costs. The calculation tends to identify funding early for the poorer roads, so the estimated budget varies from year to year. Although greatly exceeding the City’s funding levels, the budget needs analysis represents an ideal funding strategy as calculated by *StreetSaver*.

The table below shows the level of expenditures, estimated at \$116.7 million, that is needed to raise the City’s pavement condition to a network PCI average of around 90, and maintain that level while eliminating maintenance backlog. Of this amount, nearly \$3 million was designated for preventive maintenance (life-extending treatments), and about \$113.8 million for the more expensive rehabilitation and reconstruction treatments. The analysis also shows that if no road maintenance is applied over the next ten years, the overall PCI score will drop to 66 by 2028.

Cost Summary from Budget Needs Analysis

Year	PCI Treated	PCI Untreated	PM Cost	Rehab Cost	Subtotal
2019	92	83	\$1,489,154	\$20,426,617	\$21,915,771
2020	89	81	\$371,393	\$4,988,986	\$5,360,379
2021	89	79	\$435,960	\$5,291,470	\$5,727,430
2022	88	77	\$159,463	\$5,230,868	\$5,390,331
2023	90	76	\$171,571	\$18,322,025	\$18,493,596
2024	88	74	\$5,491	\$4,548,480	\$4,553,971
2025	88	72	\$5,625	\$7,323,996	\$7,329,621
2026	91	70	\$237,518	\$14,181,962	\$14,419,480
2027	93	68	\$78,198	\$24,868,232	\$24,946,430
2028	92	66	\$544	\$8,608,063	\$8,608,607

Inflation Rate	% PM	PM Total Cost	Rehab Total Cost	Total Cost
3.00%	2.53%	\$2,954,917	\$113,790,699	\$116,745,616

This page intentionally left blank.

BUDGET SCENARIOS

Once maintenance needs are established for the road network, we can run several “what-if” analyses to develop a cost-effective maintenance and rehabilitation strategy. The impact of various budget scenarios can be evaluated by projecting pavement condition values and deferred maintenance over a period of time, and make clear the advantages and disadvantages of different funding levels and maintenance strategies.

For each analysis a portion of the annual budget was allocated to preventive maintenance, such as crack and surface seals. As was the case with the budget needs module, the scenarios take into account current unit costs with inflation and treatment options. Each scenario also forecasts a cost for deferred maintenance based on projected PCI scores. Deferred maintenance refers to pavement rehabilitation that is needed but cannot be performed due to budget limitations. Putting off needed street repairs allows pavement quality to gradually decrease, but it also makes those treatments much more expensive later on, as those street sections fall into the “fair” and “poor” categories. Once deemed in need of reconstruction, the software no longer considers a section for preventive maintenance. Deferred maintenance values relay a general trend and are prone to vary depending on actual maintenance done.

➤ **Scenario 1: Unfunded (No Budget)**

The first scenario predicts the impact on pavement condition if no funding is put toward roadway projects for the next ten years. The network PCI value is estimated to drop from 83.8 to 67.

➤ **Scenario 2: \$1.8 Million Annual Budget**

The City of Lacey recently formed a Transportation Benefit District (TBD) and proposed a 0.2% increase in sales tax in order to fund street maintenance. In July of 2017, the City began collecting revenues generated by this measure. Based on early returns, the annual income is estimated at \$1.8 million through the year 2027. The PCI drops to 74 over the duration of the ten-year analysis period.

➤ **Scenario 3: Maintain Current PCI (\$4.6 million/year)**

In this target-driven scenario, *StreetSaver* calculated what it would cost to sustain the current PCI of 83.8 during a ten-year period. The total cost came to about \$45.7 million, an average of \$4.6 million each year.

➤ **Scenario 4: Unconstrained Budget (\$11.7 million/year)**


The “budget needs” study (see page 11) calculated that it would take \$116.7 million to immediately raise the network pavement condition to an ideal level and sustain that level for nine additional years. This scenario uses a yearly average of that amount, or \$11.7 million annually. The PCI score would increase from 83.8 to 91.

Scenario 1: Unfunded (No Budget)

In the first scenario, no funds are set aside for pavement preservation. The network PCI is estimated to decrease to 67 from the current value of 83.8. By the year 2028, no streets would be in the “very good” category, and categories “fair” and “poor” would make up 20.1% of all streets. Deferred maintenance is estimated to increase to over \$24 million.

Summary from Scenario 1: Unfunded

Year	PCI	Deferred Maintenance
2019	83	\$21,038,191
2028	67	\$24,544,763

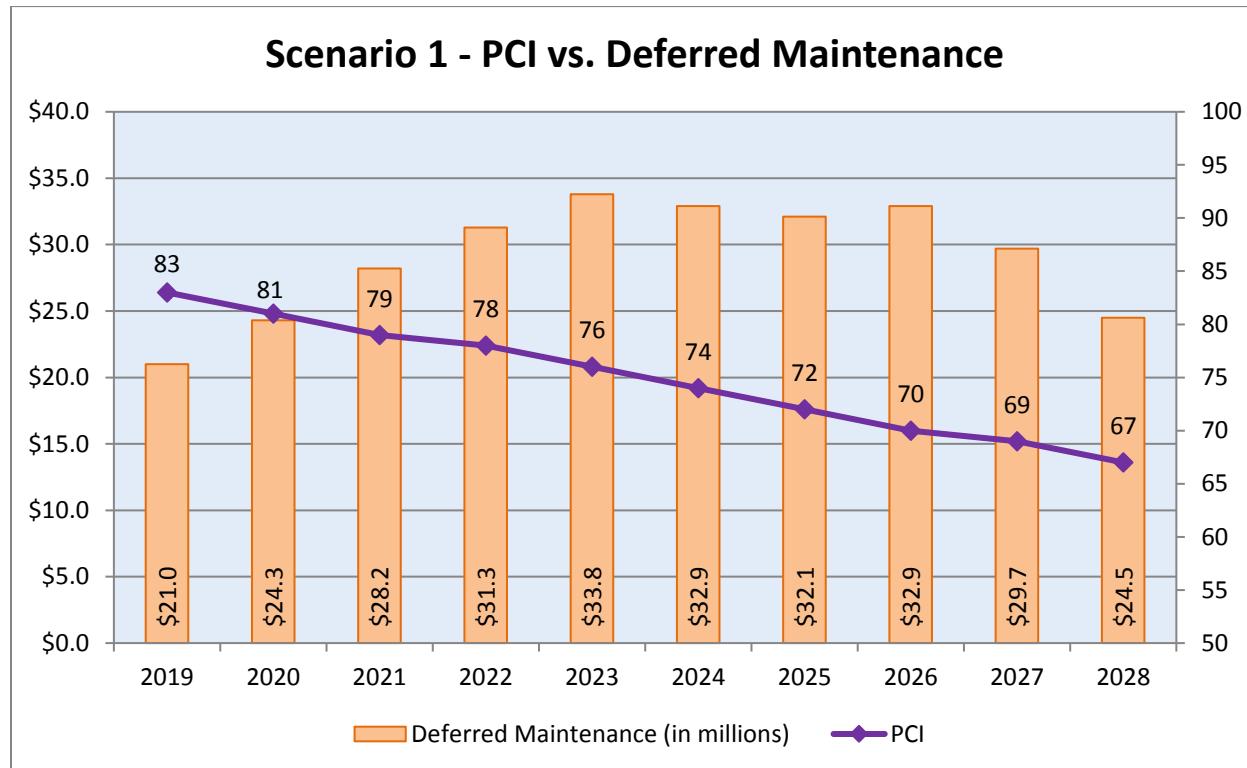

Scenario 1: Projected PCI

- Very Good (85 - 100)
- Good (60 - 84)
- Fair (40 - 59)
- Poor (0 - 39)


Parks
City Limits
UGMA



0 0.5 1 Miles

1 inch = 3,250 feet

Map Date: 10/9/2018

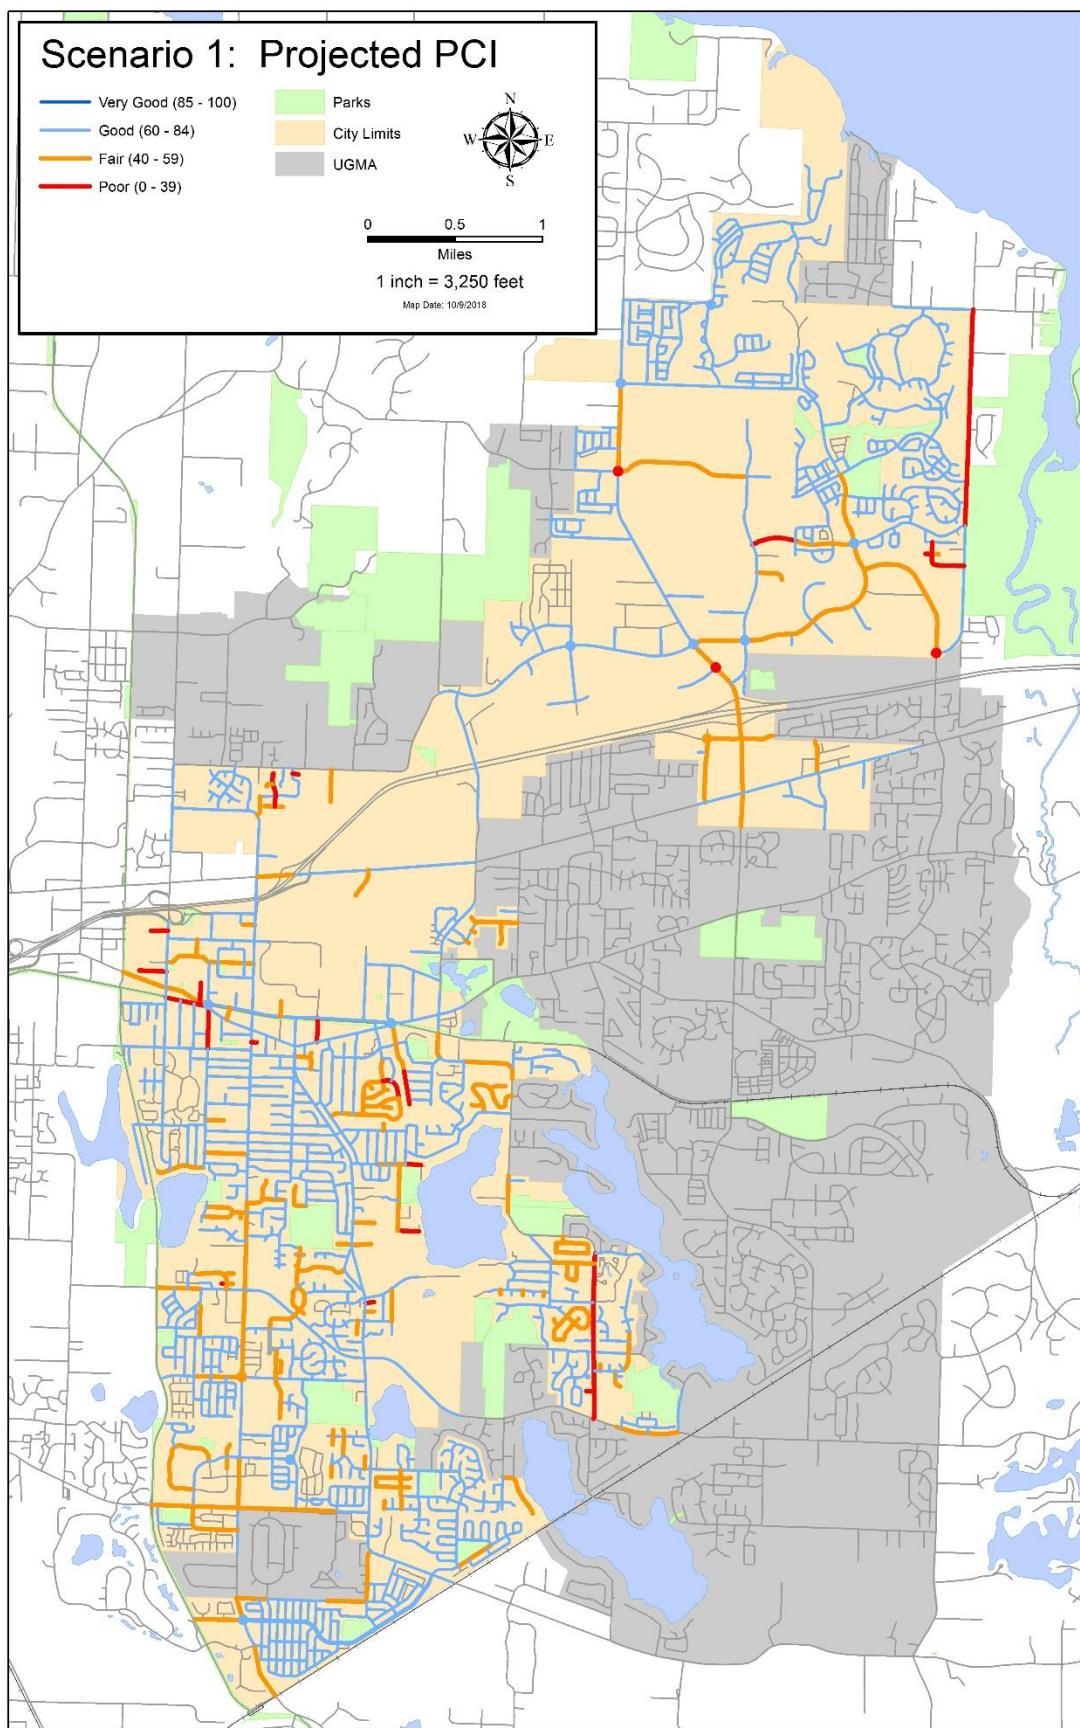


Scenario 2: \$1.8 Million Annual Budget

This scenario shows the effects of an annual \$1.8 million budget strategy toward the City's road network, beginning in 2017 and ending in 2027. The overall PCI score would steadily decrease from 83.8 to 74 by 2028. The cost of deferred maintenance would go up from \$18 million in 2019 to \$25.3 million in 2028, as an increasing number of streets would require reconstruction. At this investment level, in ten years' time 11.4% of the network would be in the "fair" category and 1.8% in the "poor" category.

Summary from Scenario 2: \$1.8 Million Annual Budget

Year	PCI	Deferred Maintenance
2019	84	\$17,989,962
2028	74	\$25,312,278

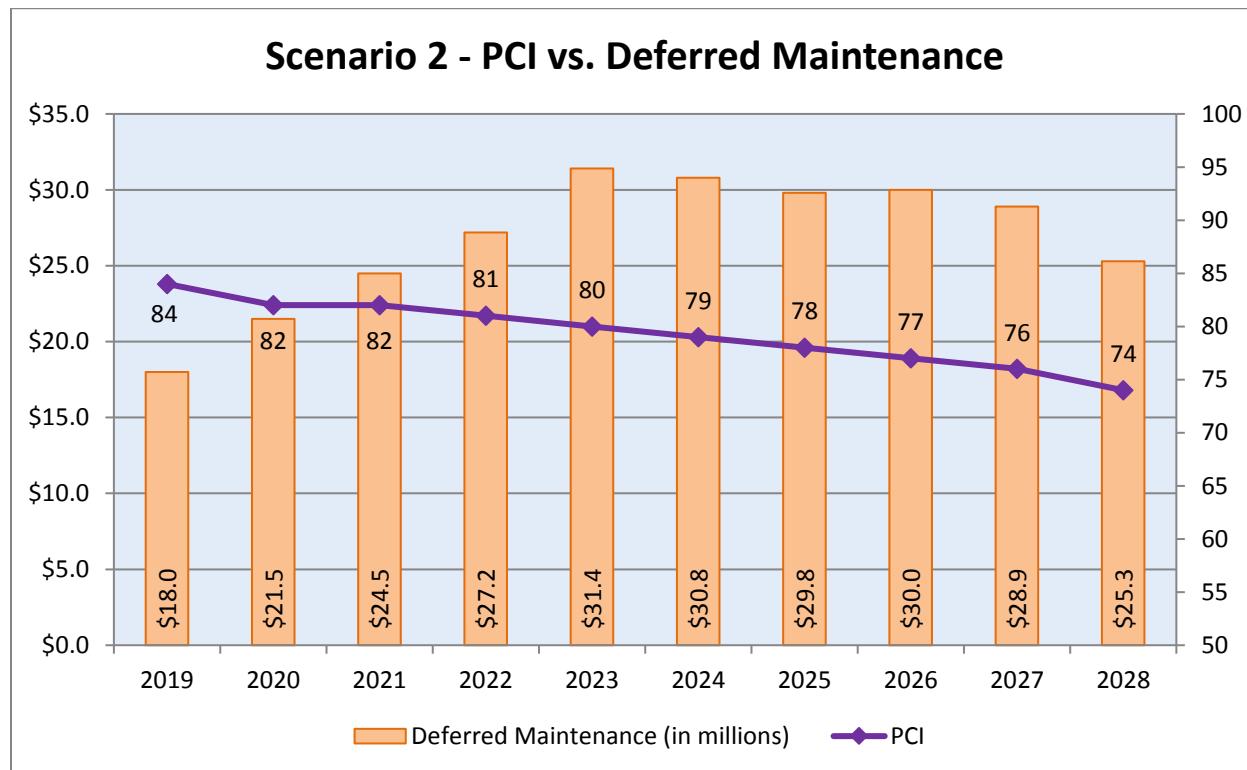

Scenario 2: Projected PCI

- Very Good (85 - 100)
- Good (60 - 84)
- Fair (40 - 59)
- Poor (0 - 39)


Parks
City Limits
UGMA



0 0.5 1 Miles

1 inch = 3,250 feet

Map Date: 10/9/2018

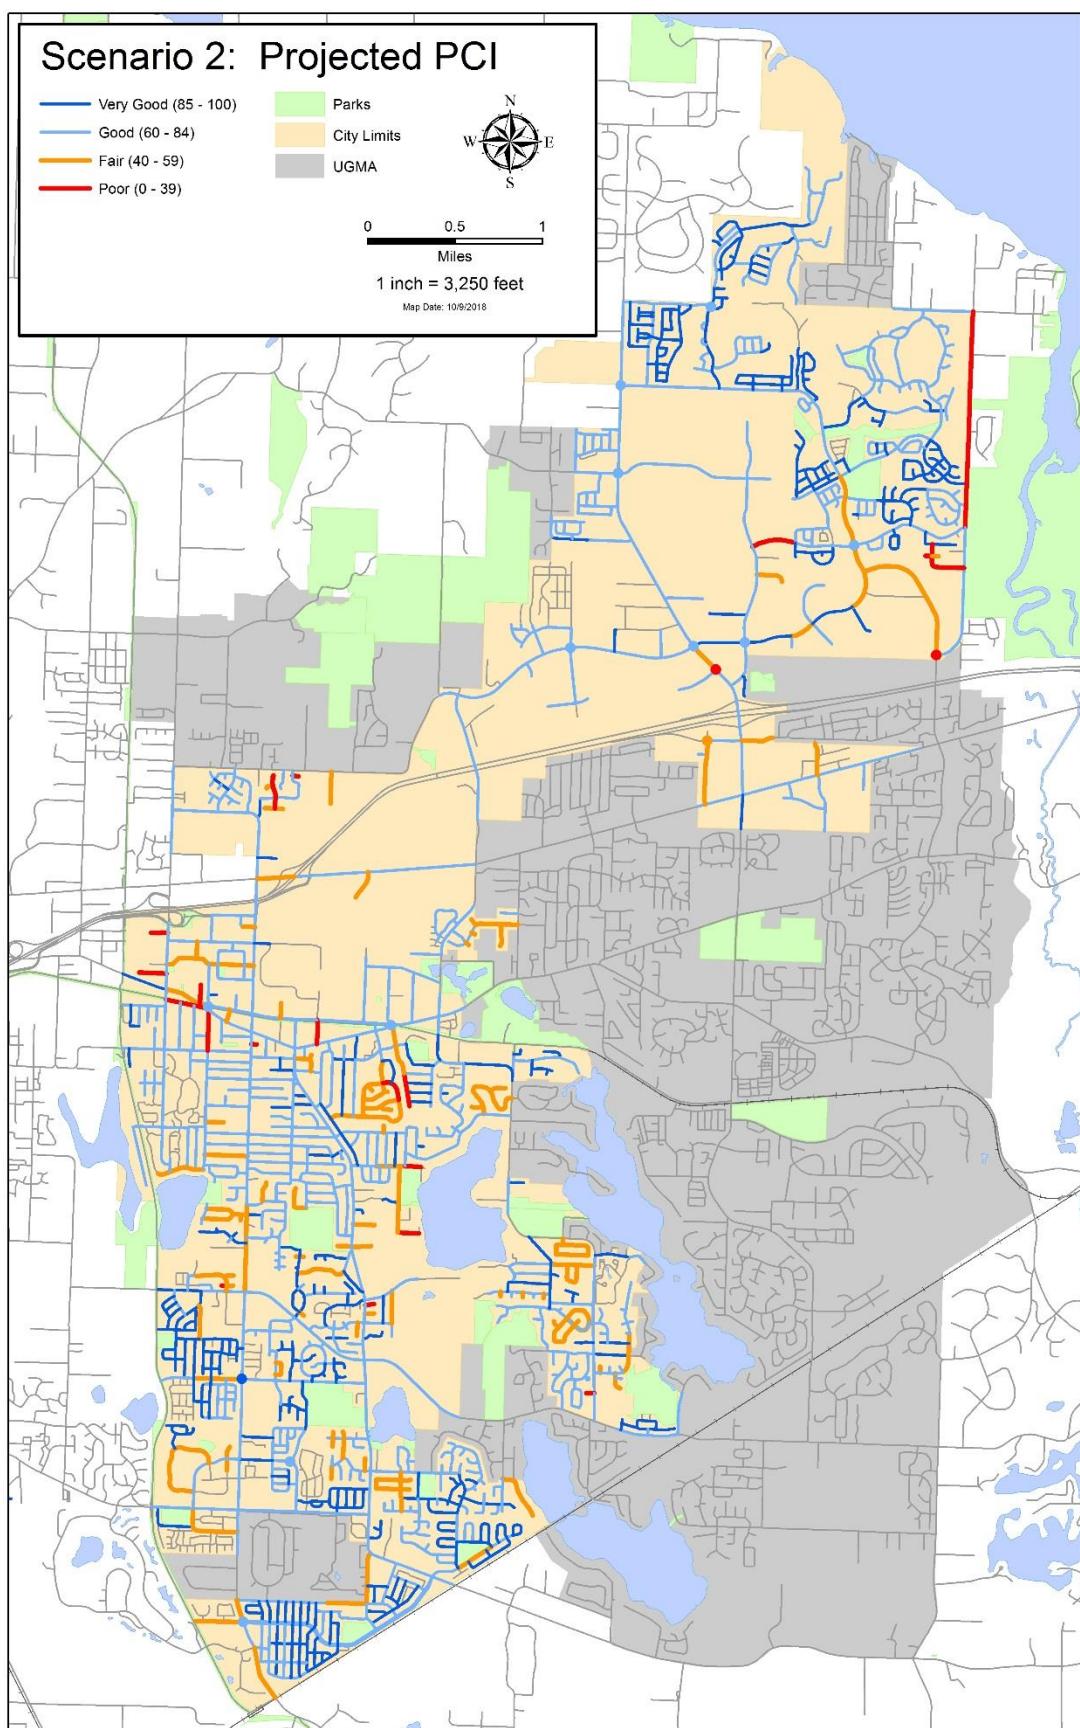


Scenario 3: Maintain Current PCI

This scenario shows what it would take to maintain the current PCI of 83.8 over a ten-year period. The *StreetSaver* program calculates an amount of \$4.6 million per year to reach this goal. The cost of deferred maintenance would increase from \$15.3 million to \$19.3 million due to the number of streets awaiting reconstruction.

Summary from Scenario 3: Maintain Current PCI


Year	PCI	Deferred Maintenance
2019	84	\$15,301,869
2028	84	\$19,286,526

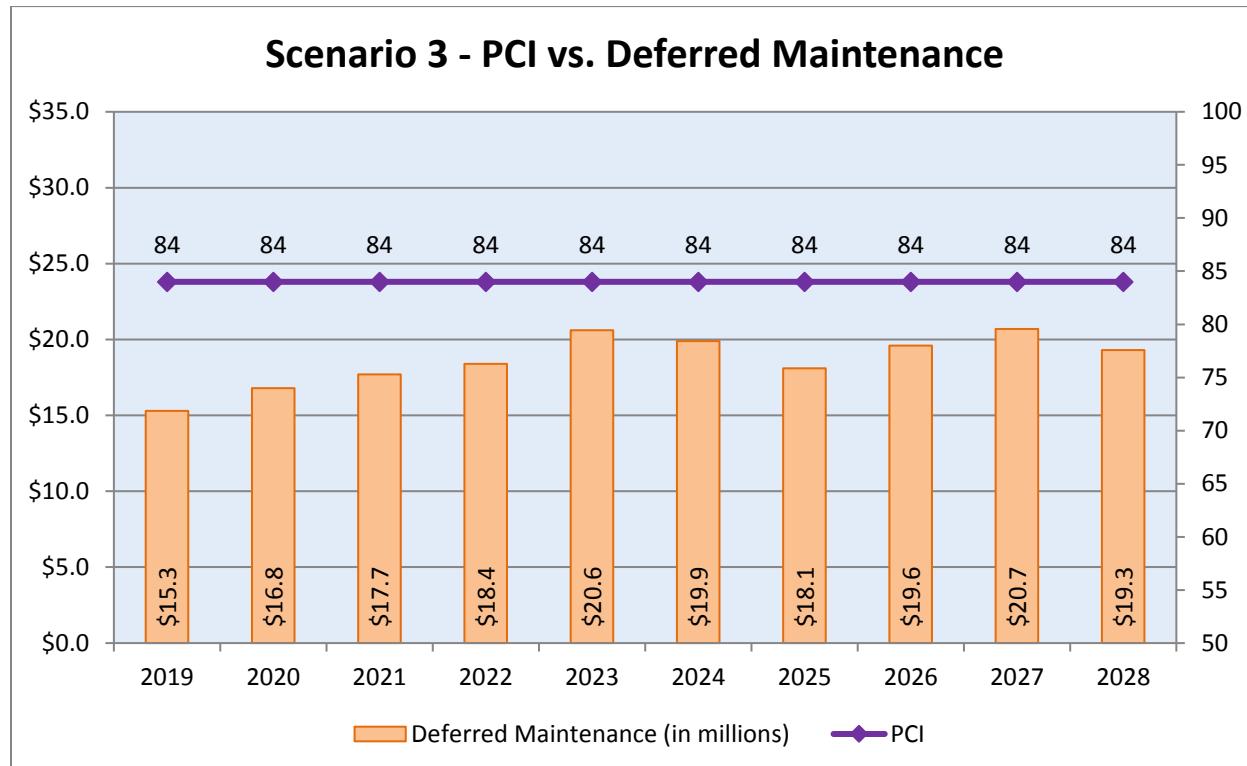

Scenario 3: Projected PCI

- Very Good (85 - 100)
- Good (60 - 84)
- Fair (40 - 59)
- Poor (0 - 39)


Parks
City Limits
UGMA



0 0.5 1 Miles

1 inch = 3,250 feet

Map Date: 10/9/2018

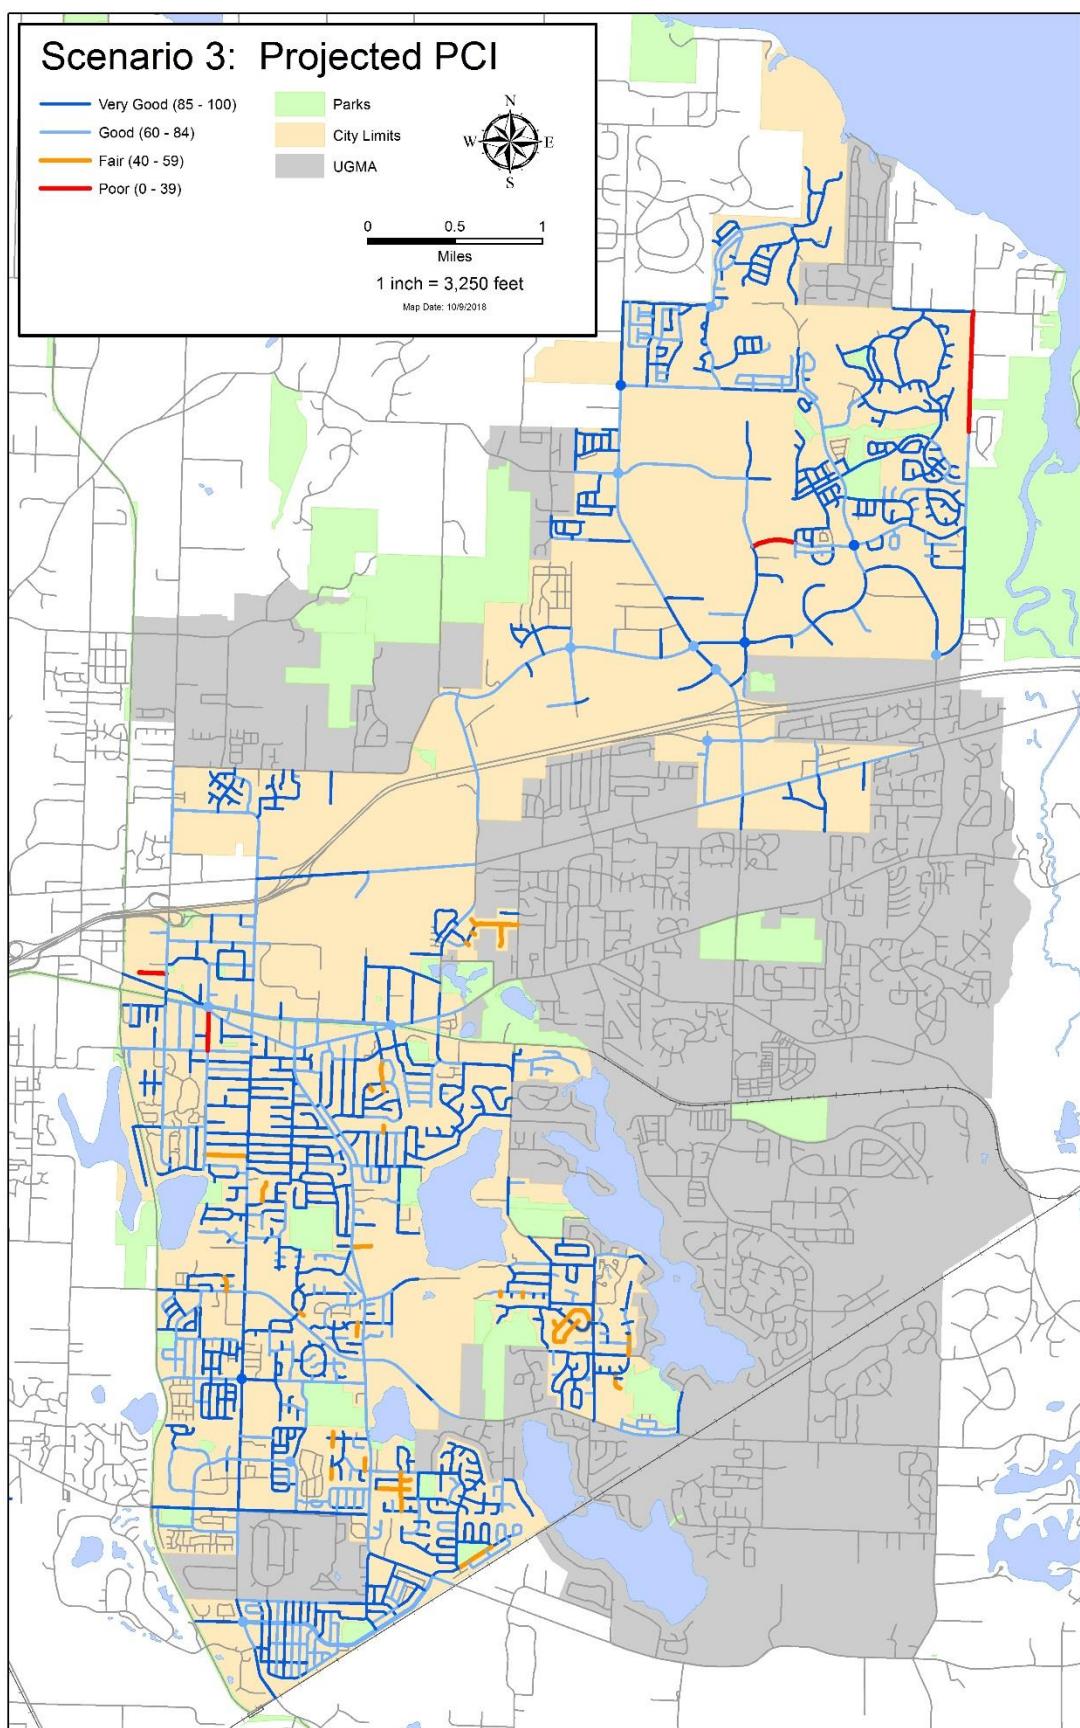


Scenario 4: Unconstrained Budget

In this scenario, \$11.7 million is applied annually for ten years. The network PCI is estimated to increase to 91 from the current value of 83.8. By the year 2028, about 84.3% of the network would be in the “very good” category and the remaining 15.7% in the “good” category. Deferred maintenance would be eliminated until the end of the ten-year period, where the \$11.7 million budget would begin to no longer meet projected maintenance requirements.

Summary from Scenario 4: Unconstrained Budget


Year	PCI	Deferred Maintenance
2019	88	\$8,139,092
2028	91	\$13,584,019

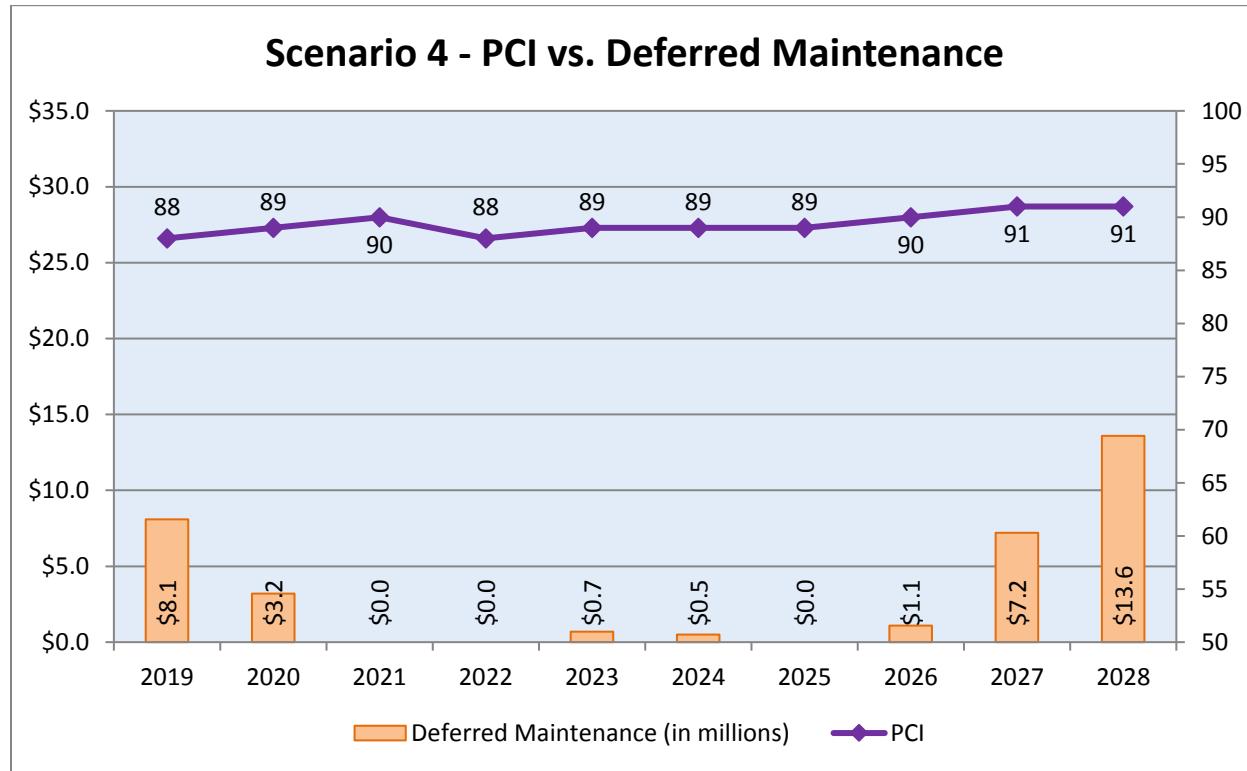

Scenario 4: Projected PCI

- Very Good (85 - 100)
- Good (60 - 84)
- Fair (40 - 59)
- Poor (0 - 39)


Parks
City Limits
UGMA





0 0.5 1 Miles

1 inch = 3,250 feet

Map Date: 10/9/2018

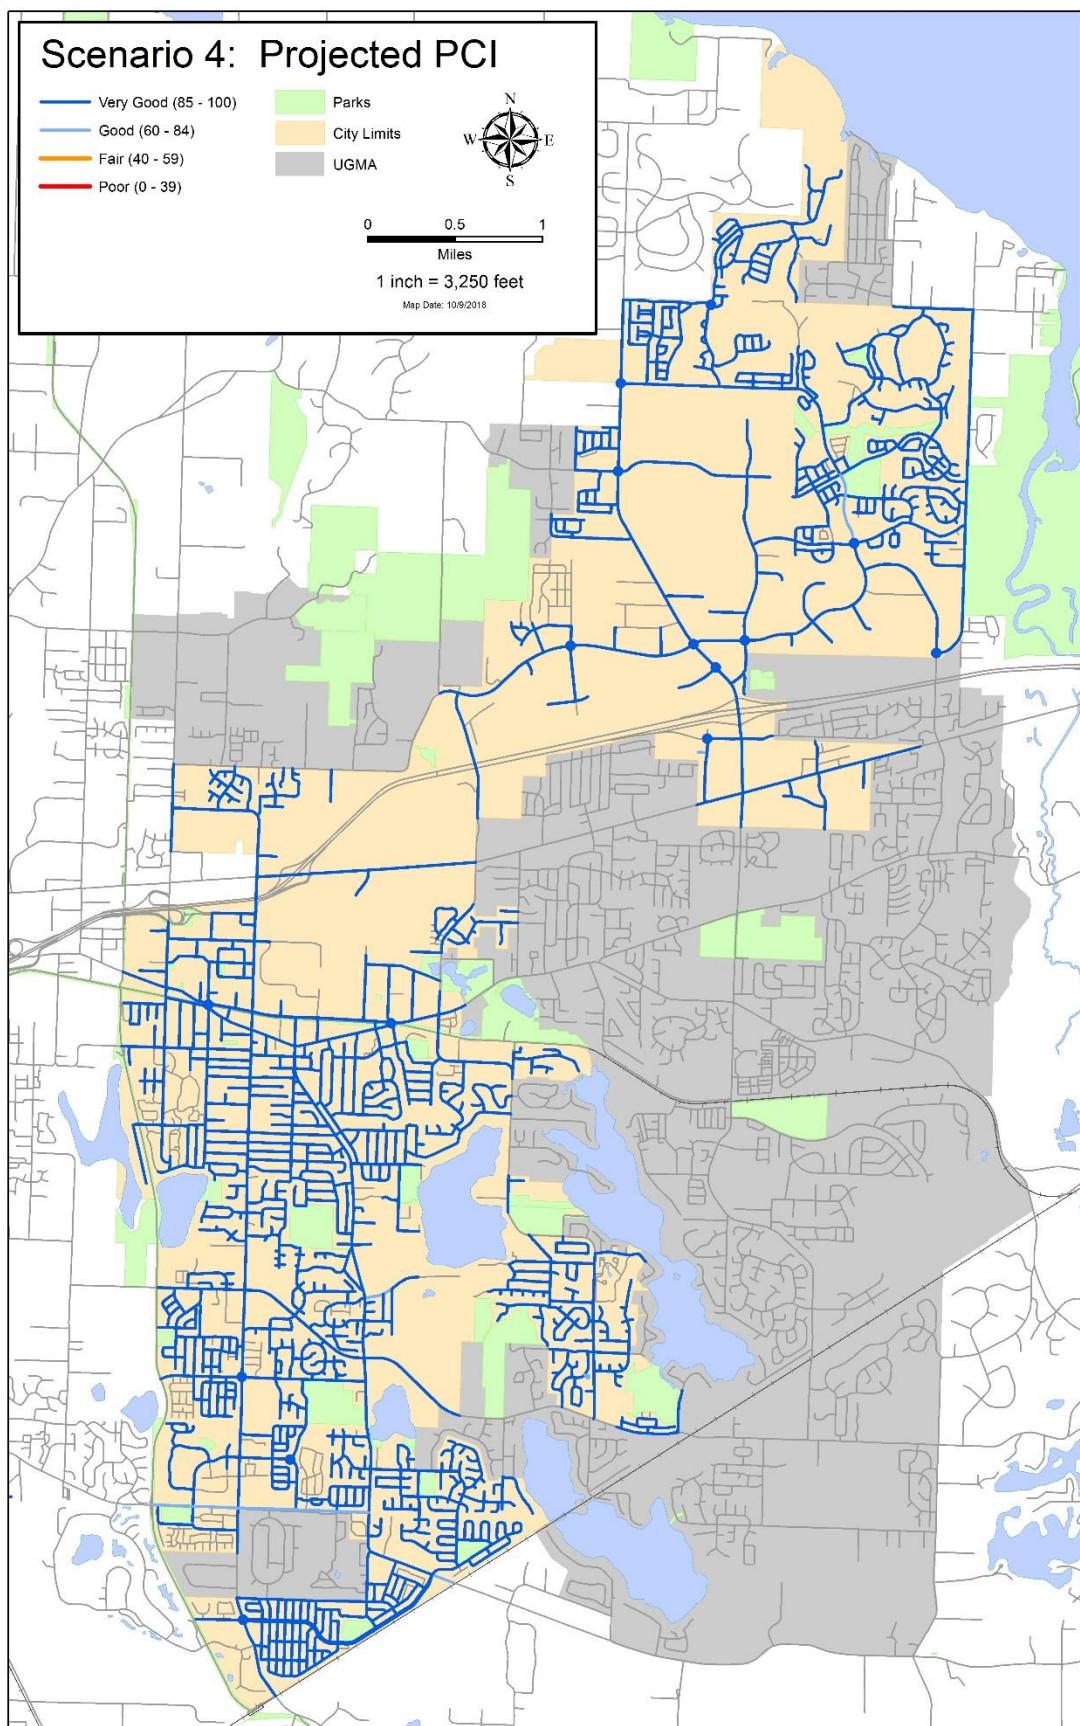

Scenario Comparison

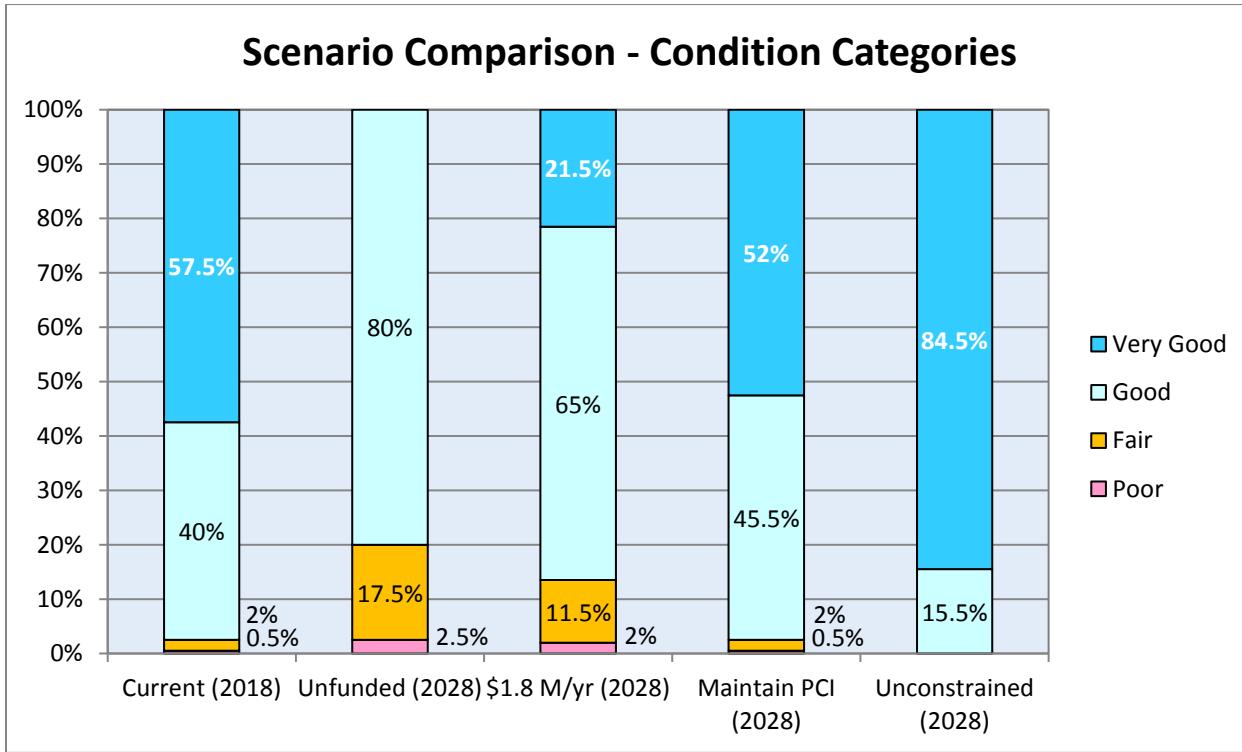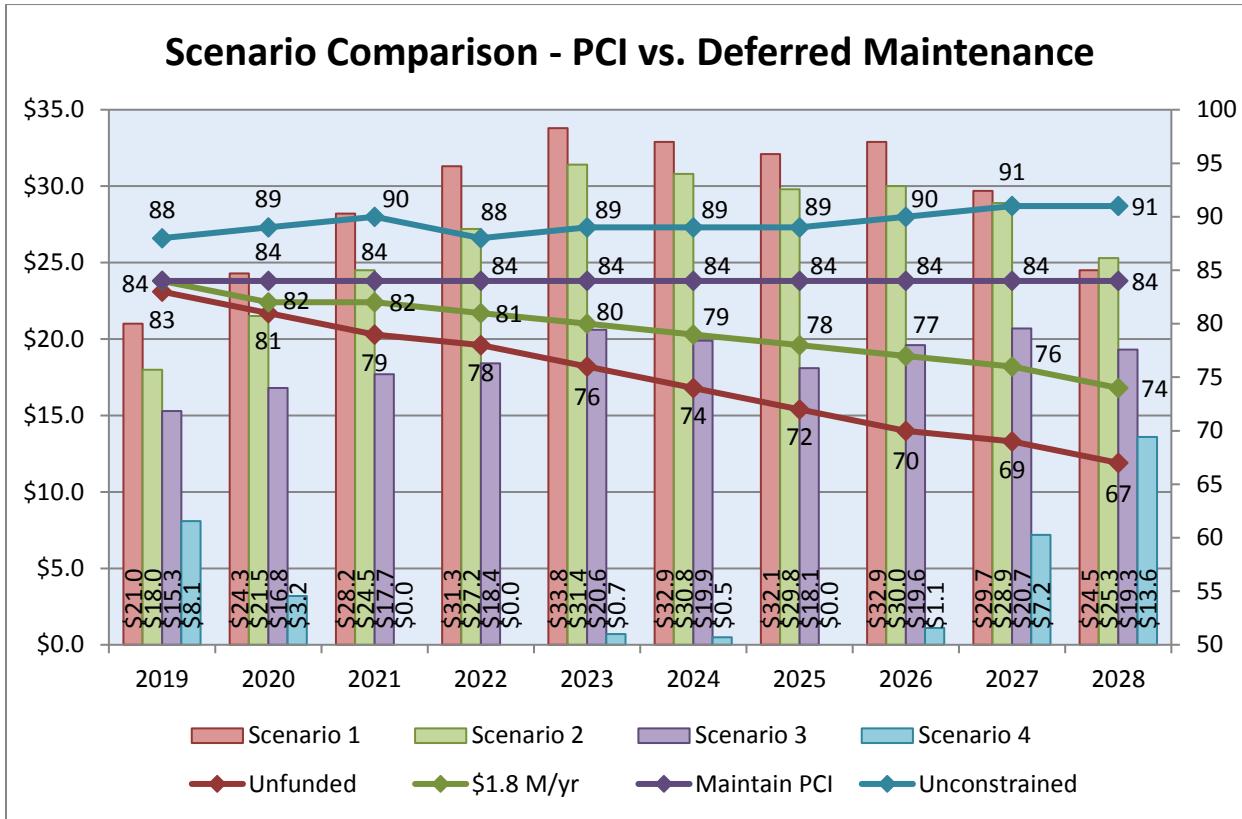

ROAD REHABILITATION HISTORY

	TREATMENT DESCRIPTION	LANE MILES	AREA (SQ. FT.)	ASPHALT COST
2009	Plane with 2" HMA Overlay	5.19	395,420	\$76/TON
	Plane with 1" HMA Overlay	0.31	33,030	
	2" HMA Overlay	0.49	38,450	
	1" HMA Overlay	0.41	22,550	
	OVERLAY/RECONST. TOTAL	6.40	489,450	
	Pavement Repair	-	4,540	
	Street Projects: 2009 Residential Overlay			
2010	4" HMA	1.59	193,200	\$75/TON
	Pulverize with 4" HMA	1.20	92,500	
	Pulverize with 2" HMA	1.51	105,820	
	Plane with 2" HMA Overlay	2.39	168,640	
	OVERLAY/RECONST. TOTAL	6.69	560,160	
	Pavement Repair	-	4,990	
	Street Projects: 2010 Street Overlay, Britton Pkwy Westbound Lane			
2011	Pulverize with 2" HMA Overlay	4.75	333,300	\$65/TON
	Plane with 2" HMA Overlay	1.34	100,500	
	2" HMA Overlay	1.46	130,900	
	OVERLAY/RECONST. TOTAL	7.55	564,700	
	Pavement Repair	-	15,840	
	Slurry Seal	2.39	232,420	
	Street Projects: 2011 Street Overlay, 2011 Waterline Replacement			
2012	Reconstruct Structure (6" HMA)	1.92	109,960	\$67/TON
	Plane with 2" HMA Overlay	12.02	755,700	
	3" HMA Overlay	0.42	45,200	
	2" HMA Overlay	0.39	21,420	
	OVERLAY/RECONST. TOTAL	14.74	932,280	
	Pavement Repair	-	6,400	
	Street Projects: Carpenter Rd Reconstruction, Ruddell Rd Overlay, Marvin Rd/32 nd Ave			


	TREATMENT DESCRIPTION	LANE MILES	AREA (SQ. FT.)	ASPHALT COST
2013	Reconstruct Structure (4" HMA)	0.73	79,470	\$75/TON
	Reconstruct Structure (3" HMA)	0.95	59,760	
	Pulverize with 3" HMA	2.01	113,990	
	Pulverize with 2" HMA	0.28	19,200	
	Plane with 2" HMA Overlay	0.69	65,880	
	OVERLAY/RECONST. TOTAL	4.66	338,300	
Street Projects: 2013 Street Overlay				
2014	Pulverize with 4" HMA	1.50	120,030	\$80/TON
	Pulverize with 3" HMA	0.45	31,930	
	Plane with 2" HMA Overlay	0.11	7,280	
	Plane with 1" HMA Overlay	0.08	6,720	
	OVERLAY/RECONST. TOTAL	2.14	165,960	
	Pavement Repair	-	11,270	
Slurry Seal				
Street Projects: 2014 Street Overlay				
2015	Reconstruct with 4" Fiber HMA	1.76	118,800	\$84/TON
	Street Projects: 2015 Street Overlay			
2016	Reconstruct with 8" Fiber HMA	0.82	57,800	\$77/TON
	Pulverize with 3" HMA	1.31	81,200	
	Pulverize with 2" HMA	7.69	524,100	
	Plane with 2" Fiber HMA	0.43	40,930	
	OVERLAY/RECONST. TOTAL	10.25	704,030	
	Pavement Repair		14,000	
Street Projects: College to Ruddell, Shady Lane/Hicks Lake, Marvin Rd Widening				
2017	Reconstruct with 8" Fiber HMA	2.10	164,060	\$92/TON
	Street Projects: Hogum Bay Rd Improvements			
2018	Reconstruct with 4" Fiber HMA	0.24	18,400	\$123/TON
	Pulverize with 4" Fiber HMA	0.49	33,700	
	Pulverize with 3" HMA	0.69	39,300	
	Pulverize with 2" Fiber HMA	0.98	62,300	
	Pulverize with 2" HMA	0.78	46,100	
	Plane with 3" HMA	0.16	9,600	
	Plane with 2.5" Fiber HMA	1.39	117,500	
	OVERLAY/RECONST. TOTAL	4.73	326,900	
Street Projects: 2018 Street Overlay, 2017 Water Improvements, Lift Station #2 Replacement				

2018 ROADWAY IMPROVEMENTS

----- ----- ----- -----


2018 Street Overlay

- Reconstruction of 0.24 lane miles of 21st Ave with 4" fiber reinforced asphalt
- Pulverization of 0.49 lane miles of 14th Ave with 4" fiber reinforced asphalt
- Pulverization of 0.98 lane miles of 17th Ave, 18th Ave, and 19th Ave with 2" fiber reinforced asphalt
- *Grind and overlay of 1.39 lane miles of Golf Club Rd, Stikes Ct, Stikes Dr, and Stikes Lp with 2.5" fiber reinforced asphalt
 - ❖ *Paving on Stikes Ct, Stikes Dr, and Stikes Lp is scheduled for spring of 2019
- Stormwater improvements

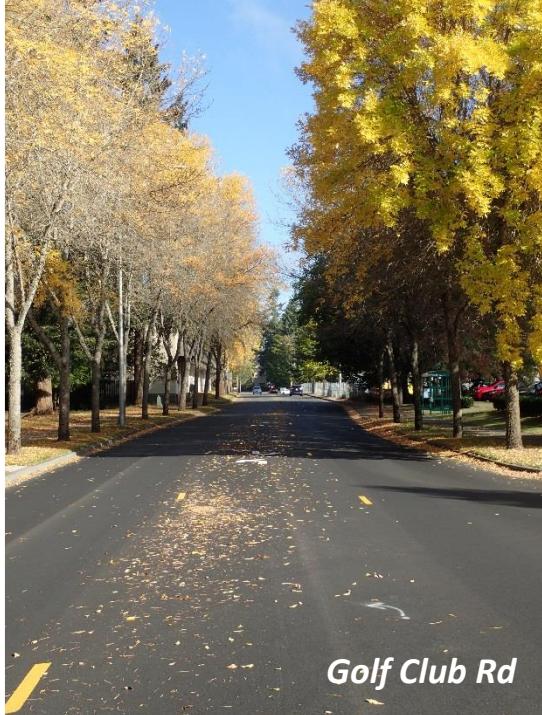


2017 Water Improvements

- Pulverization of 0.78 lane miles of 16th Ave, Brunswick St, and Magnolia St with 2" asphalt
- Water improvements

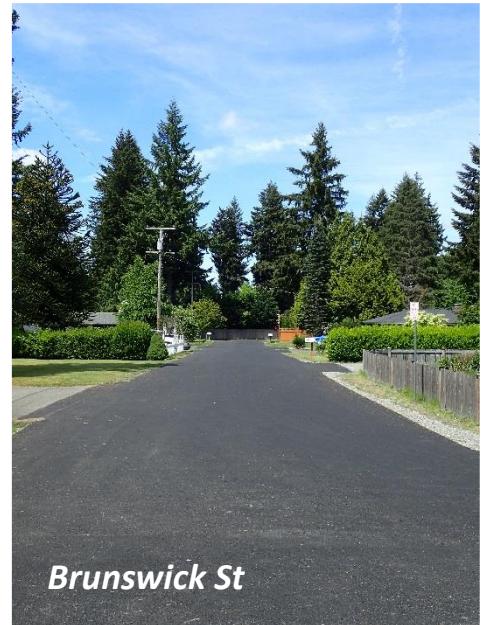

Lift Station #2 Replacement

- Pulverization of 0.69 lane miles of Westlake Dr with 3" asphalt
- Grind and overlay of 0.16 lane miles of 21st Ave with 3" asphalt
- Construction of new lift station located on Westlake Dr
- Wastewater and stormwater improvements

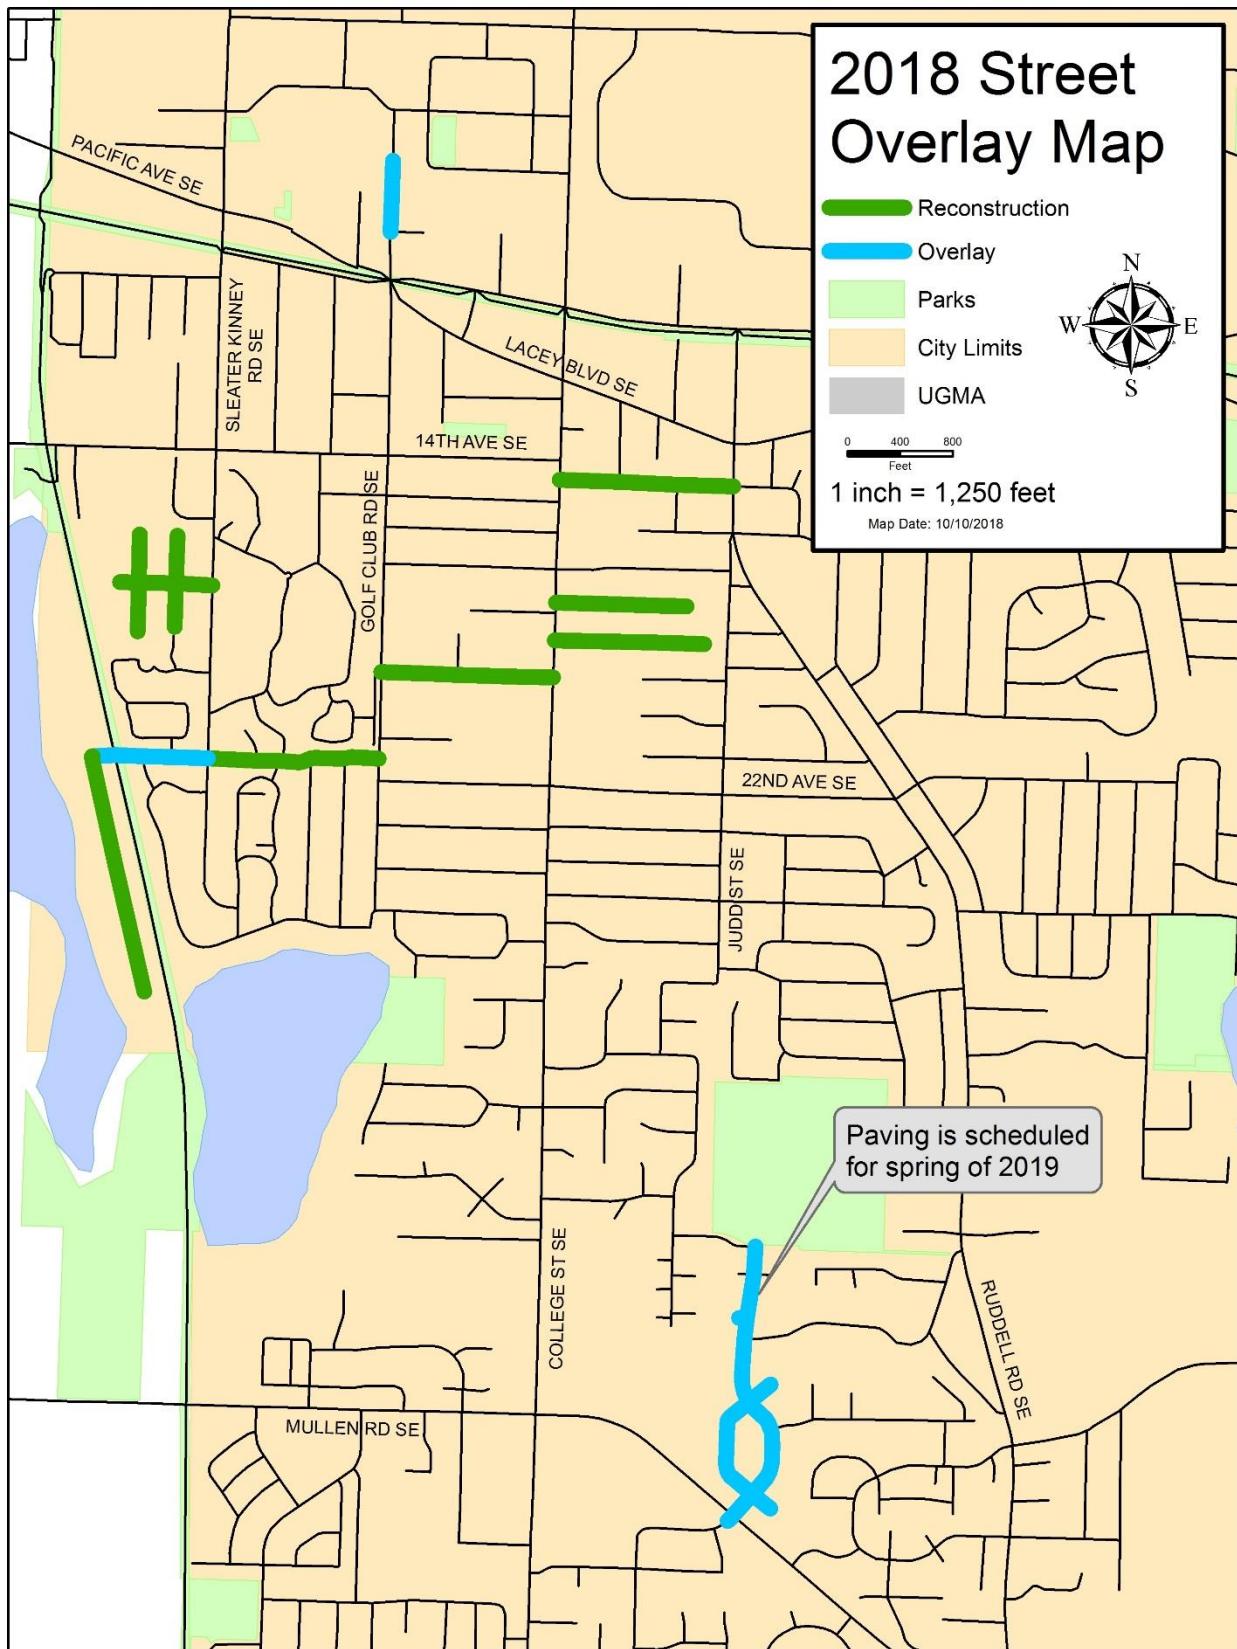


This page intentionally left blank.

2018 Pavement Rating Map

- Very Good (85 - 100)
- Good (60 - 84)
- Fair (40 - 59)
- Poor (0 - 39)


Parks
City Limits
UGMA



0 0.5 1
Miles
1 inch = 3,250 feet

Map Date: 10/10/2018

A-1

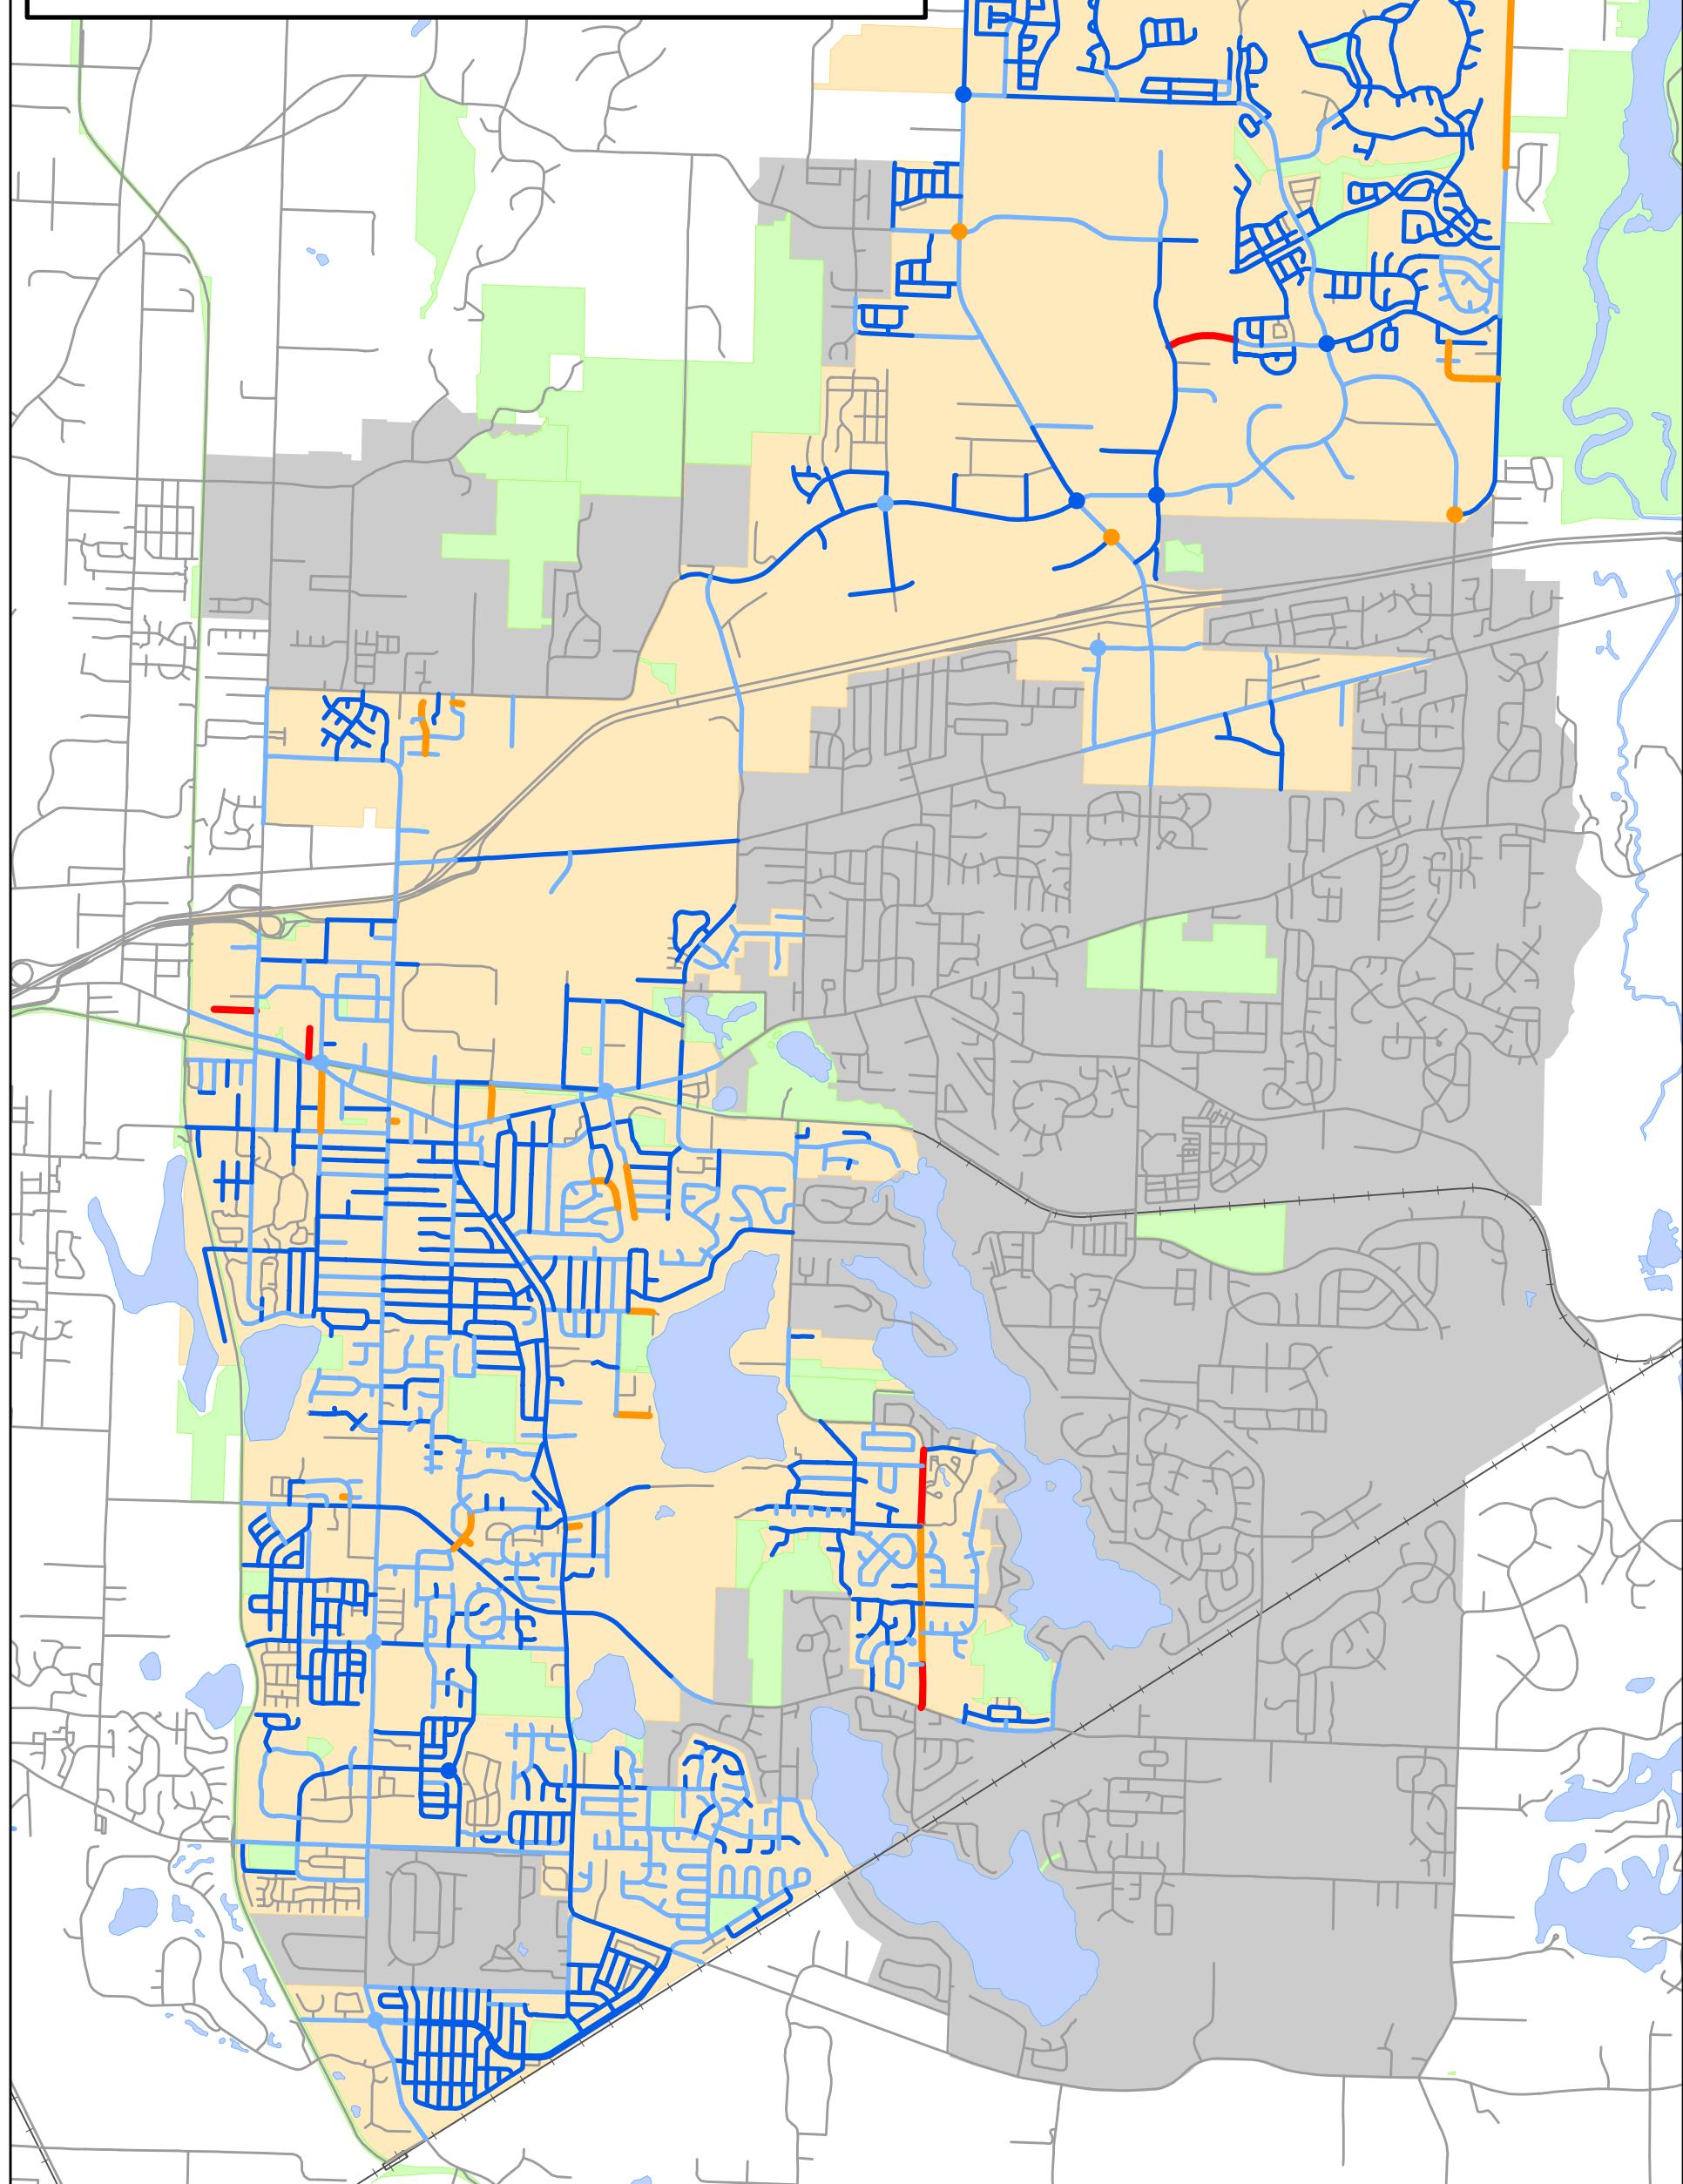

Estimated Remaining Service Life (RSL) Map


A-2

- 31+ Years
- 21 - 30 Years
- 11 - 20 Years
- 0 - 10 Years

- Parks
- City Limits
- UGMA

0 0.5 1
Miles
1 inch = 3,250 feet

Map Date: 10/10/2018

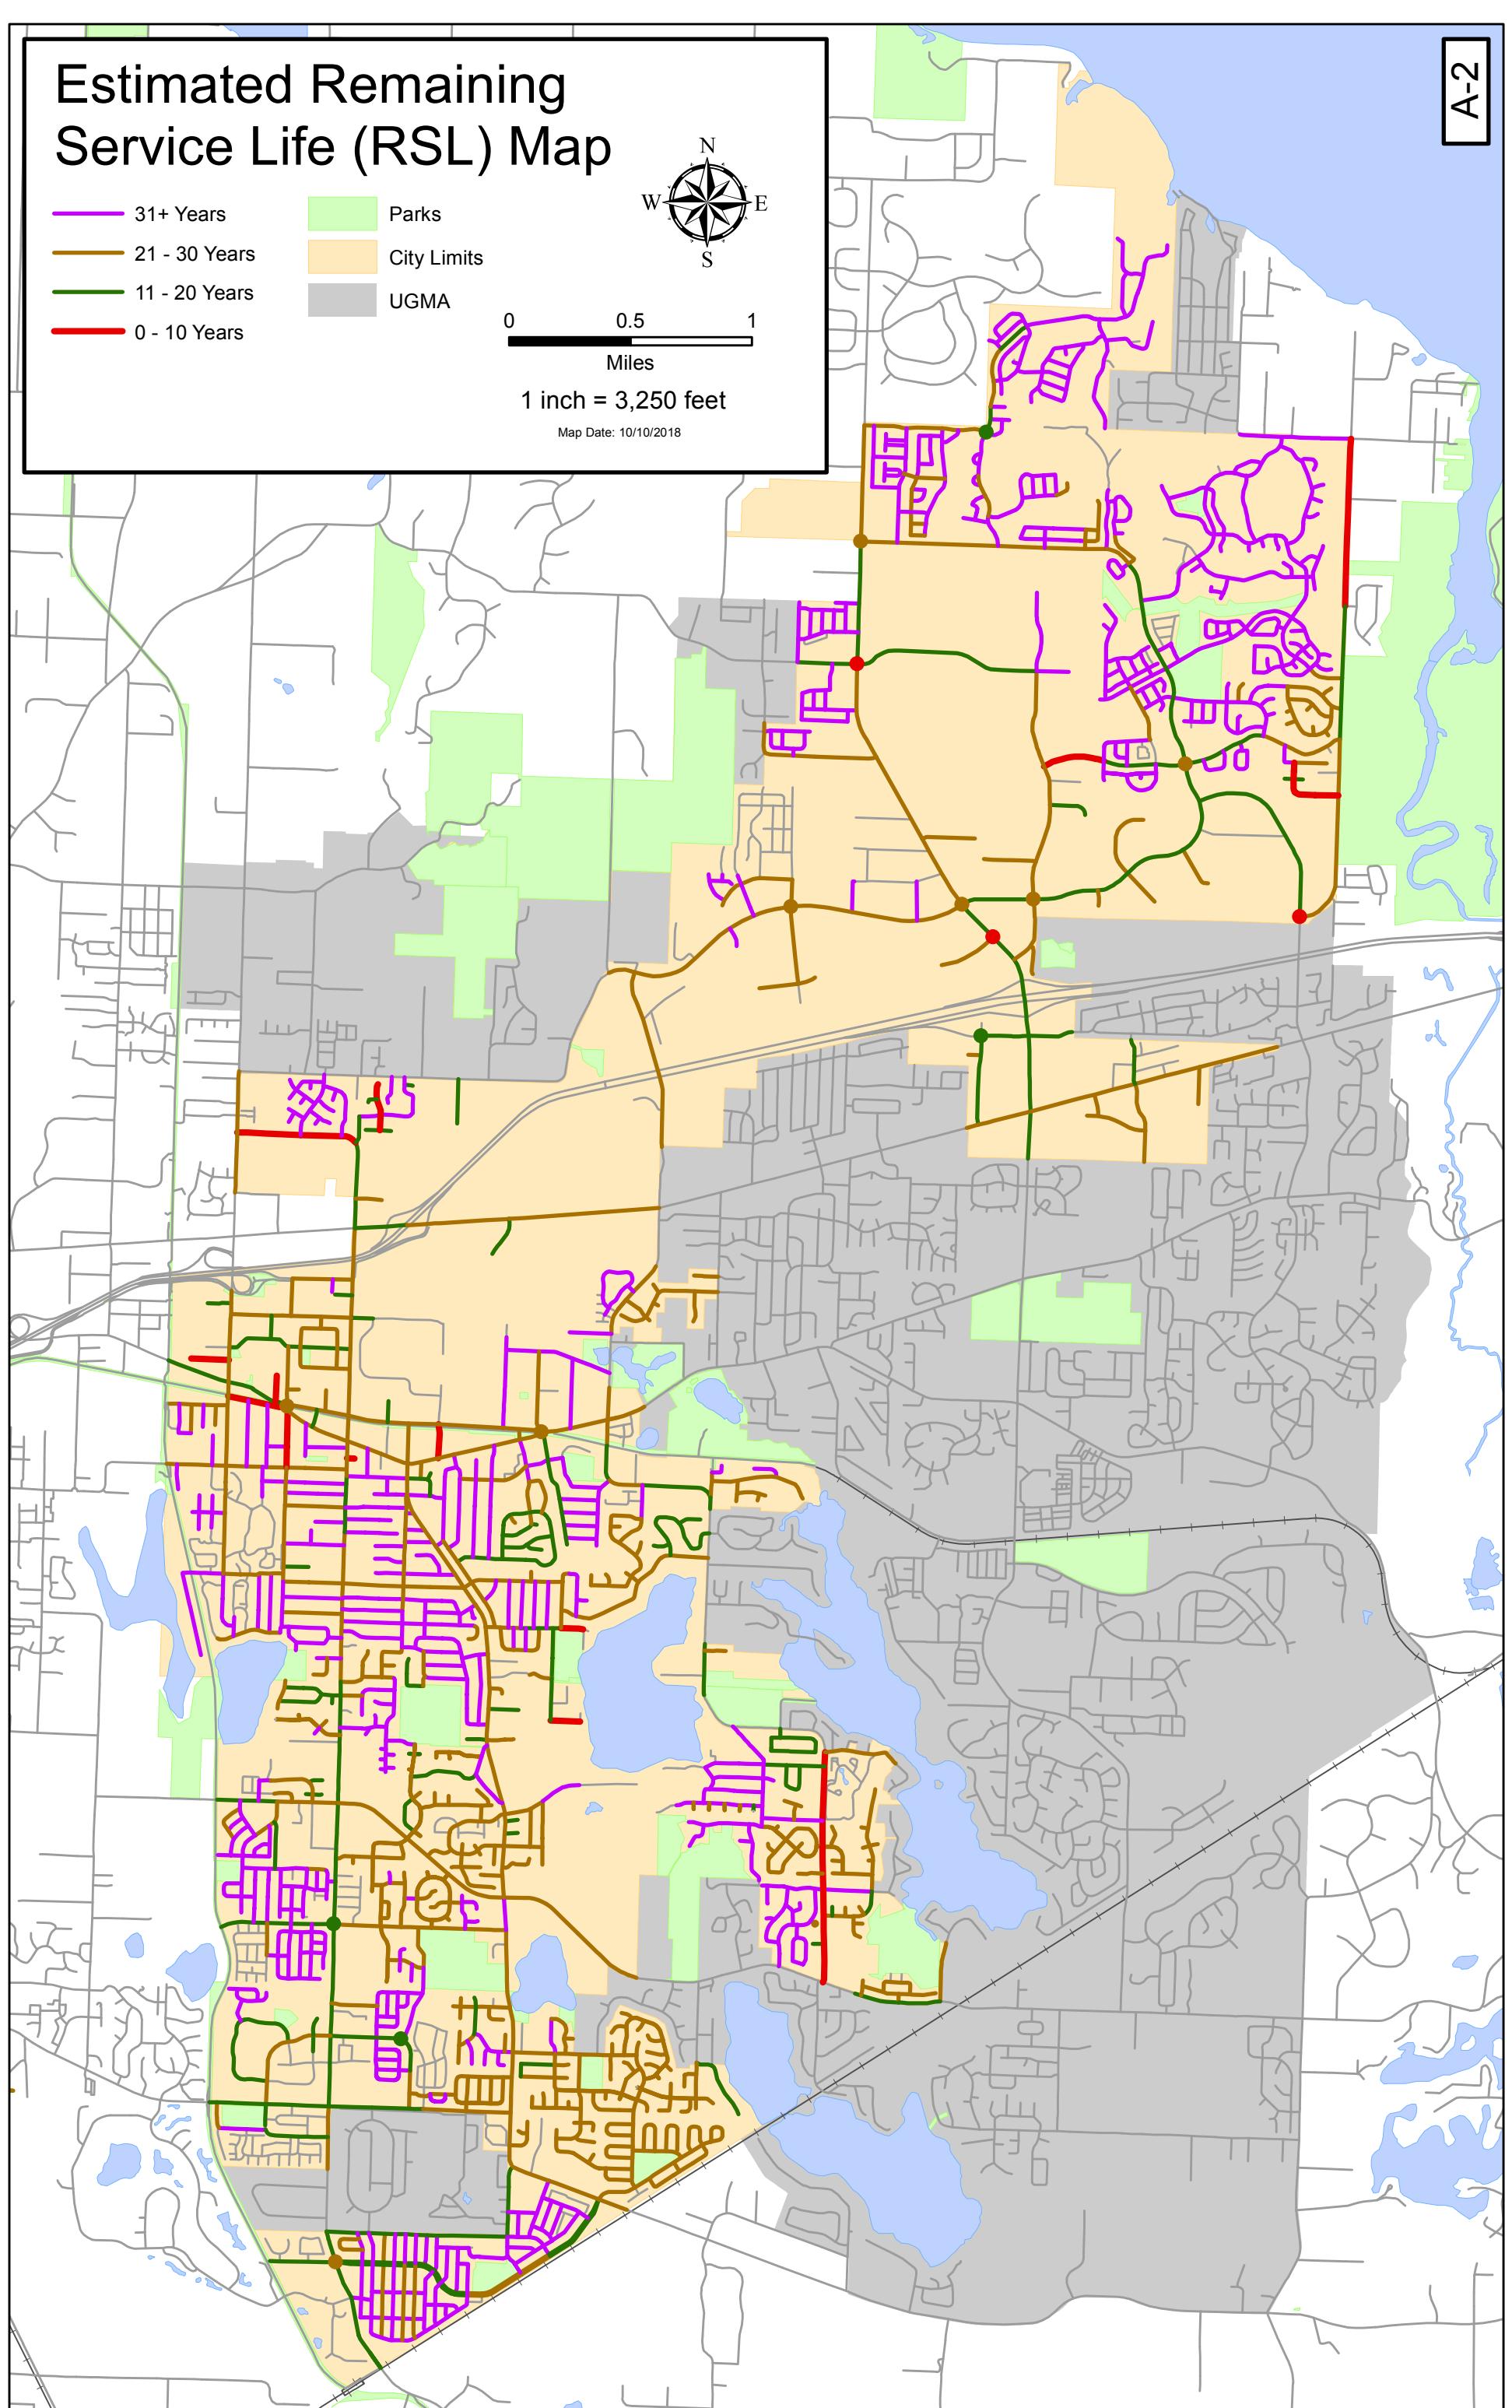

Functional Classification Map

Arterial
Collector
Residential


Parks
City Limits
UGMA



0 0.5 1
Miles
1 inch = 3,250 feet

Map Date: 10/9/2018

A-3

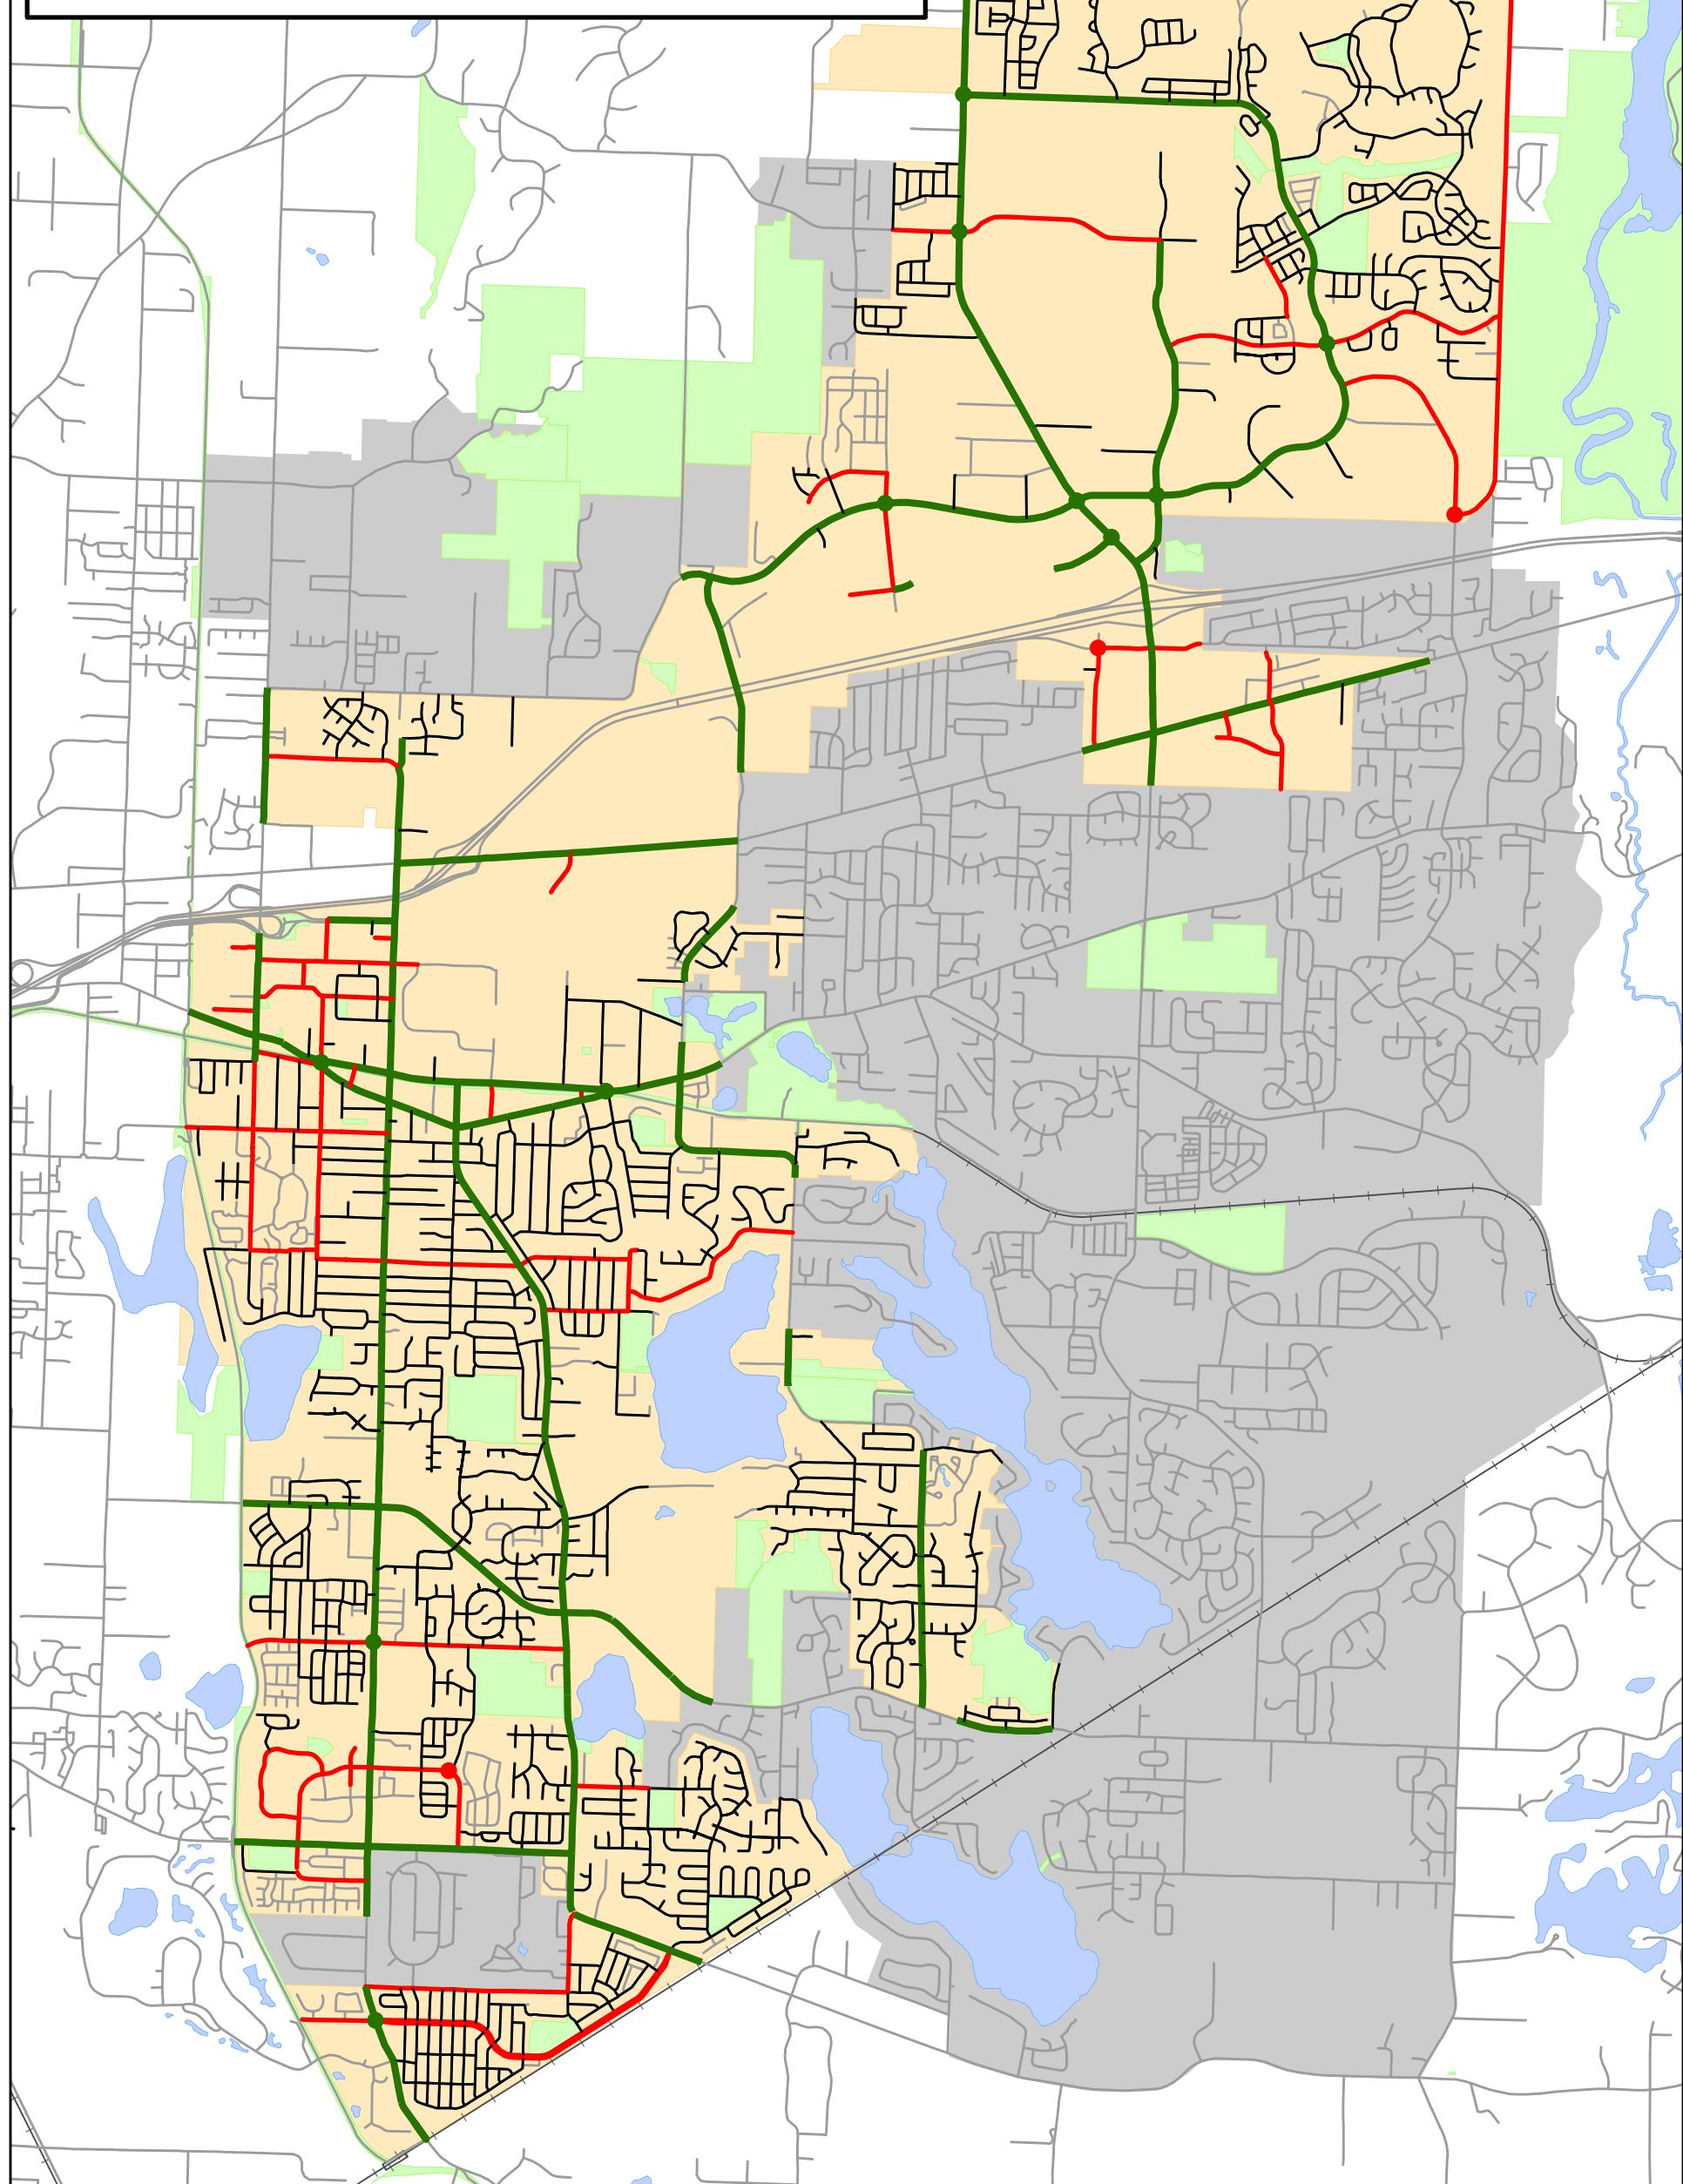


Road Maintenance History Map

- | | | |
|-------------|------|-------------|
| 1990 - 1994 | 2013 | Parks |
| 1995 - 1999 | 2014 | City Limits |
| 2000 - 2004 | 2015 | UGMA |
| 2005 - 2009 | 2016 | |
| 2010 | 2017 | |
| 2011 | 2018 | |
| 2012 | | |
- 0 0.5 1
Miles
1 inch = 3,250 feet

Map Date: 10/9/2018

A-4

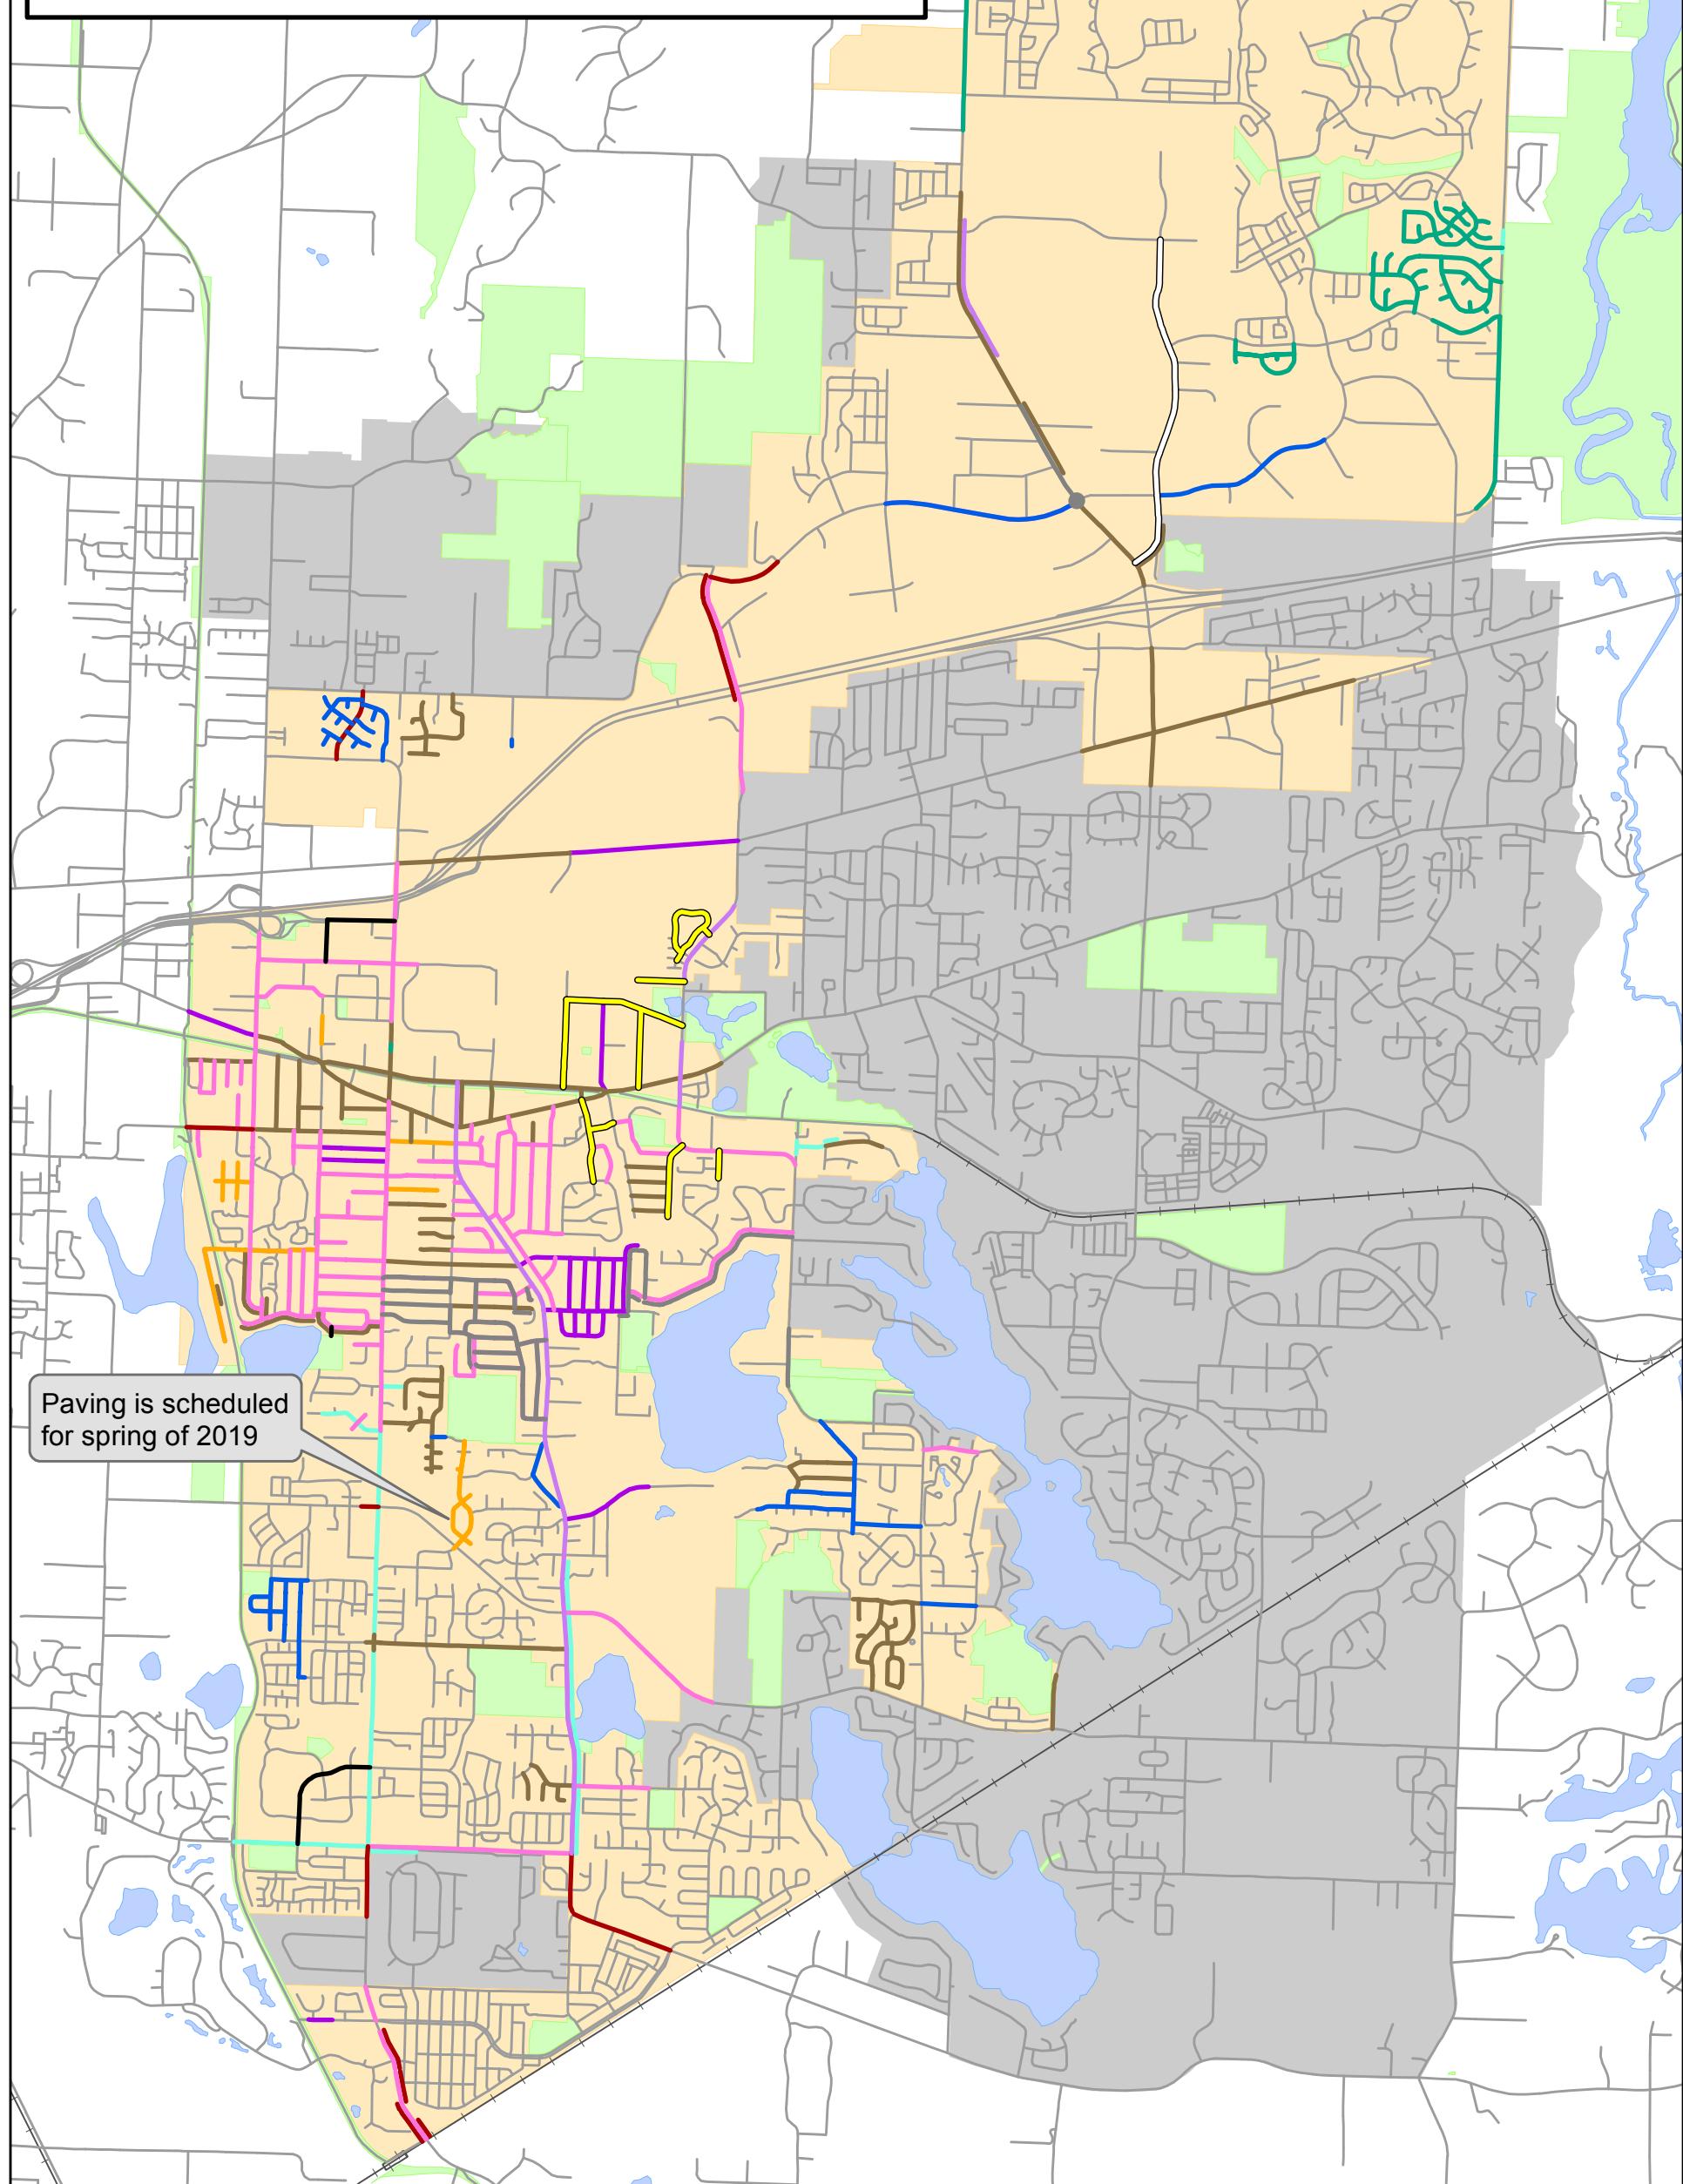

New Road History Map

- 1990 - 1994
- 1995 - 1999
- 2000 - 2004
- 2005 - 2009
- 2010
- 2011
- 2012
- 2013
- 2014
- 2015
- 2016
- 2017
- 2018


Parks
City Limits
UGMA

N
W E
S

0 0.5 1
Miles
1 inch = 3,250 feet

Map Date: 10/9/2018

A-5

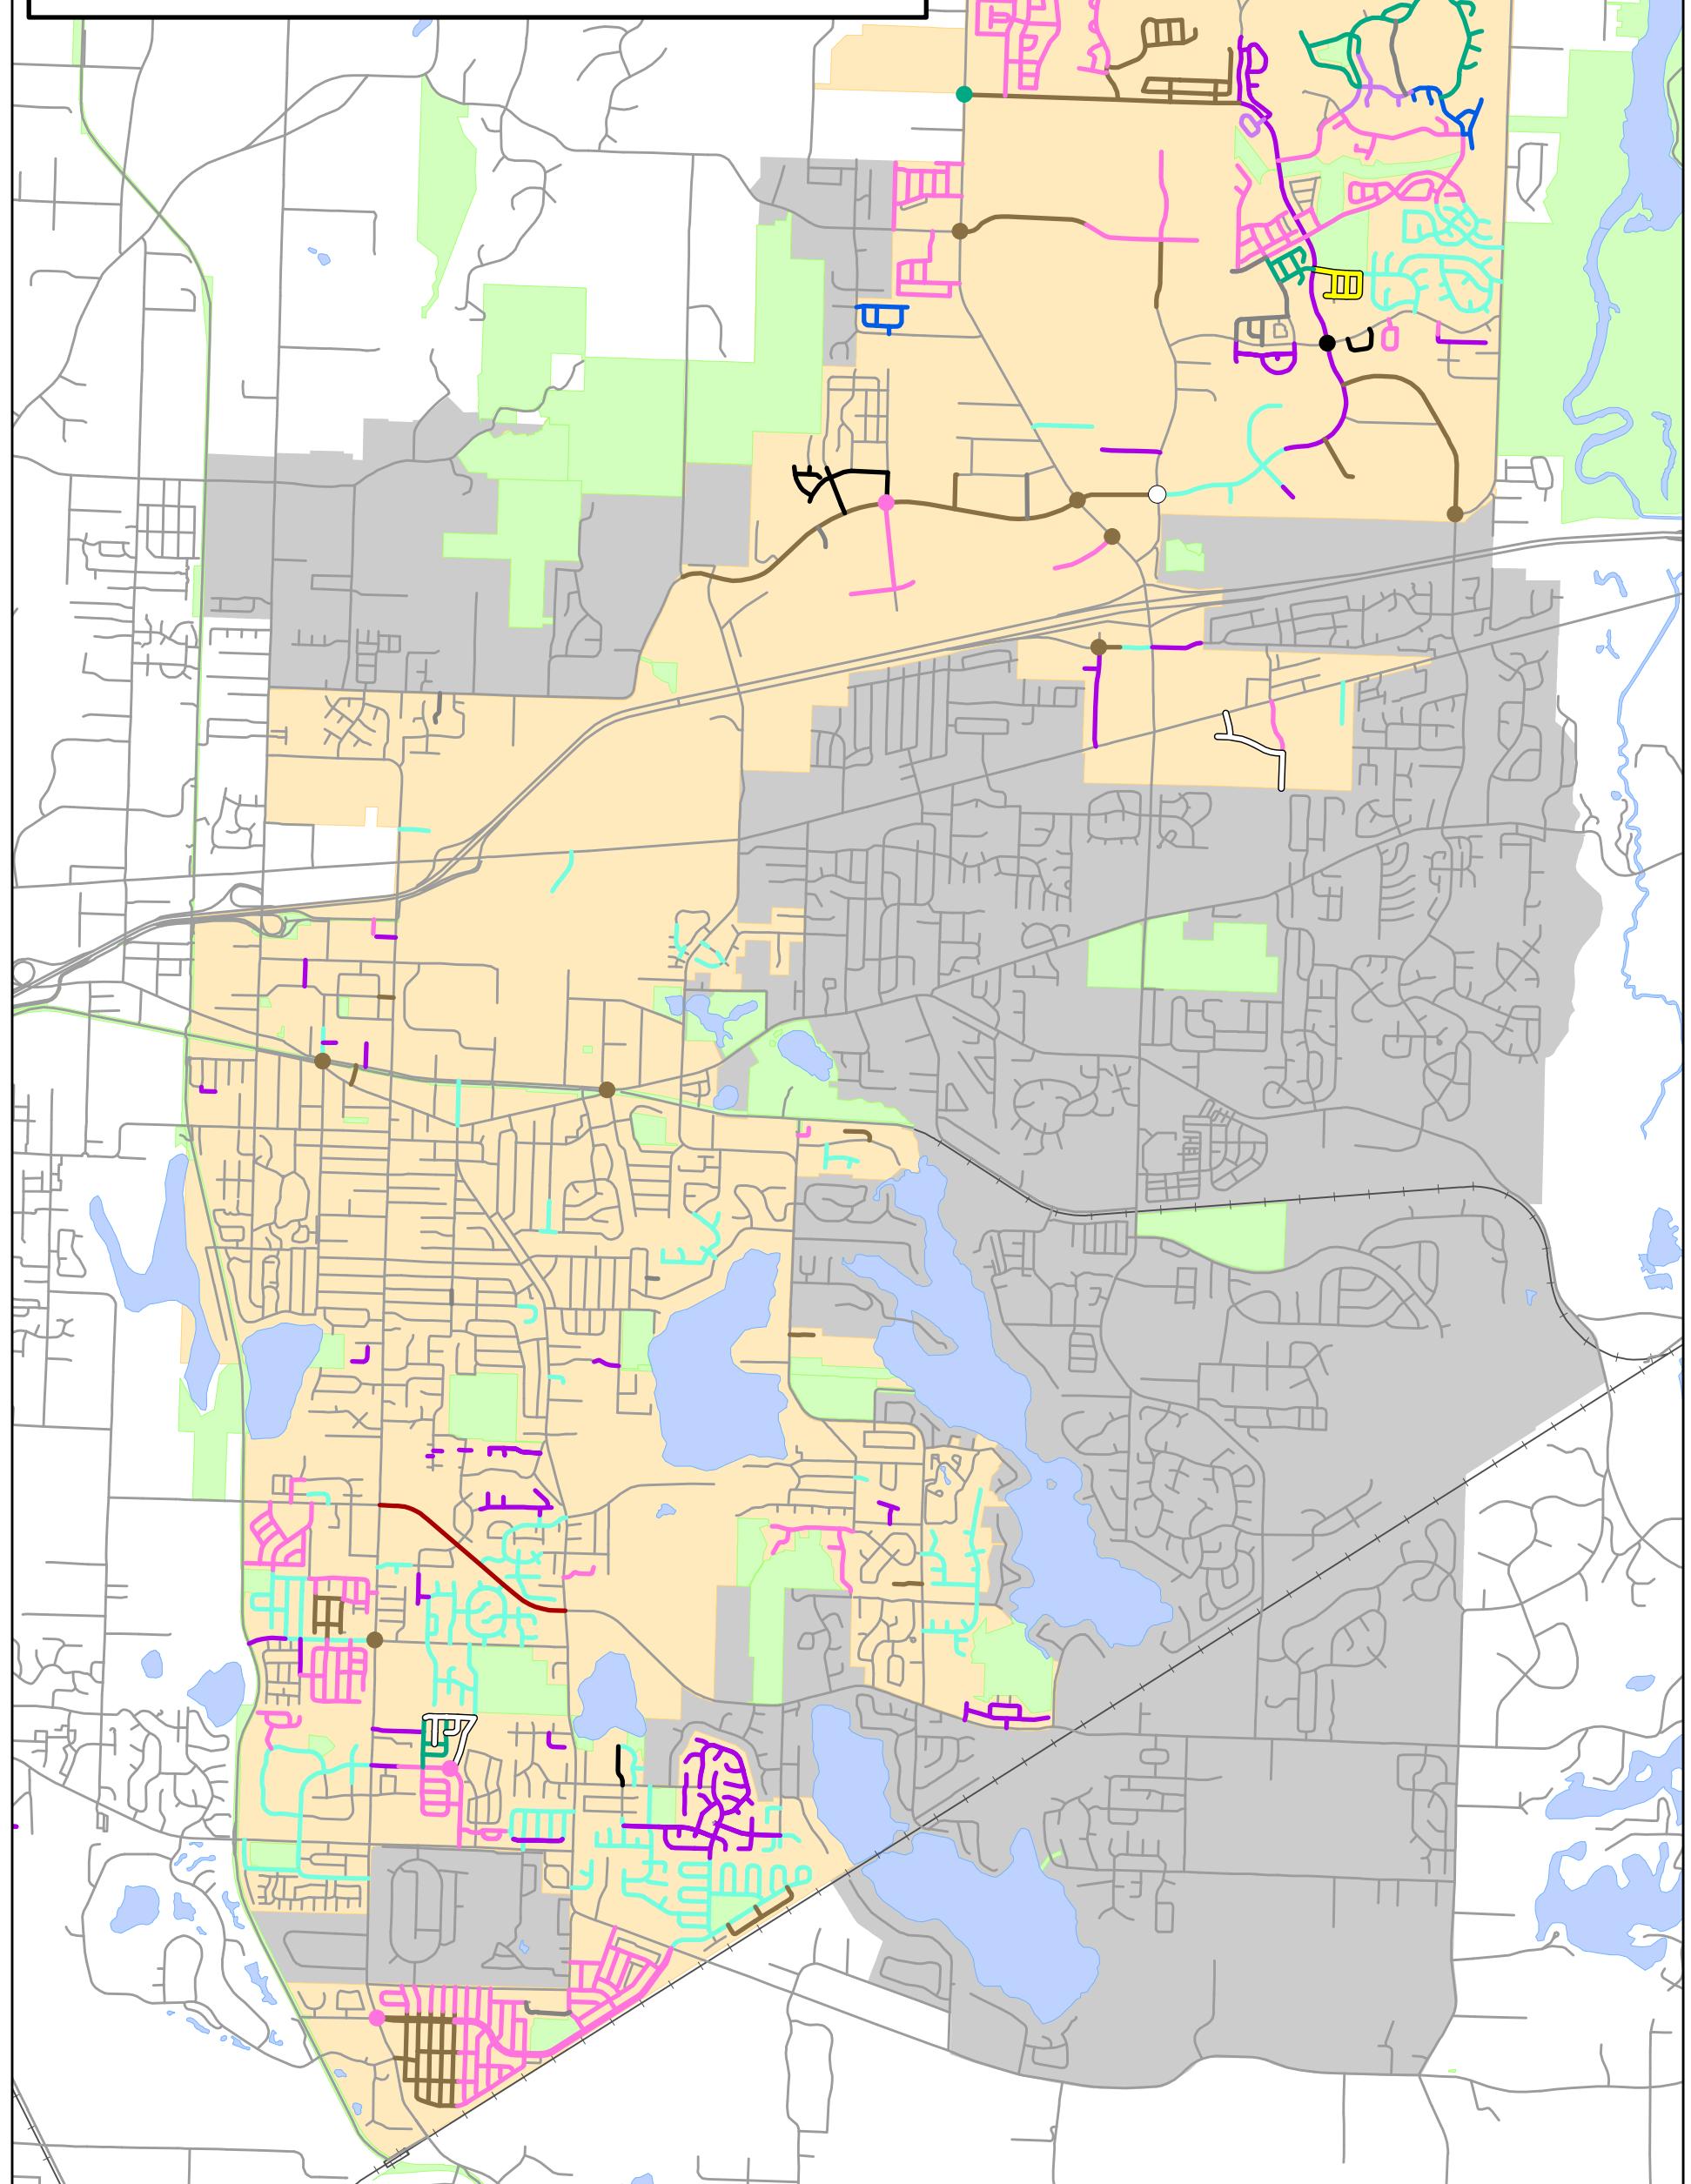

PAVEMENT CONDITION INDEX SCORES

Pavement Condition Index (PCI):
A value between 0 and 100 which is used to indicate the general condition of a pavement. This table shows PCI scores from the past five years for each road segment.

Remaining Service Life (RSL):
The estimated number of years to the time when the pavement is providing substandard service quality.

Street Name	Begin Location	End Location	2018	2017	2016	2015	2014	Func. Class	Length (ft)	RSL
Campus Park Dr. NE	Jude Ct. NE	Cameron Dr. NE	95	95	95	95	95	Residential	1230	34
Campus Park Dr. NE	Capri Ct. NE	Jude Ct. NE	95	95	95	95	95	Residential	340	34
Campus Park Dr. NE	Campus Highlands Dr. NE	Capri Ct. NE	95	95	97	96	100	Residential	1090	34
Campus Prairie Lp. NE	31st Ave. NE	31st Ave. NE	88	89	89	87	87	Residential	1346	31
Campus Willows Lp. NE	Willamette Dr. NE	Willamette Dr. NE	95	95	96	96	96	Residential	1150	34
Candace Ct. SE	Komachin Lp. SE	End of Road	79	81	81	81	83	Residential	420	30
Candlewood Ct. SE	Candlewood Dr. SE	End of Road	87	88	89	87	88	Residential	340	34
Candlewood Dr. SE	Timberline Dr. SE	Clearwater Dr. SE	87	89	91	91	89	Residential	450	34
Canton Ave. NE	Orcas St. NE	Orcas Lp. NE	89	90	91	91	90	Residential	540	41
Capri Ct. NE	Campus Park Dr. NE	End of Road	95	95	95	95	95	Residential	130	34
Capstan Dr. NE	Lanyard Dr. NE	Preston St. NE	90	91	91	89	87	Residential	360	32
Carolina St. SE	66th Ave. SE	Texas Ave. SE	89	89	89	92	92	Residential	540	31
Carpenter Ct. SE	Diamond Lp. SE	End of Road	84	85	86	84	85	Residential	190	29
Carpenter Hills Lp. SE	Carpenter Rd. SE	Carpenter Rd. SE	71	73	75	73	78	Residential	2550	20
Carpenter Rd. NE	City Limits	I-5 Corridor	81	83	85	85	87	Arterial	1360	24
Carpenter Rd. NE	I-5 Corridor	Gravel Ln. NE	84	84	87	85	87	Arterial	1020	21
Carpenter Rd. NE	Gravel Ln. NE	Britton Pkwy. NE	84	84	85	86	87	Arterial	1050	26
Carpenter Rd. SE	Mullen Rd. SE	45th Ave. SE	37	38	39	38	37	Arterial	830	3
Carpenter Rd. SE	45th Ave. SE	41st Ave. SE	41	44	45	47	46	Arterial	1180	4
Carpenter Rd. SE	41st Ave. SE	38th Dr. SE	43	45	48	49	52	Arterial	930	5
Carpenter Rd. SE	38th Dr. SE	37th Ave. SE	41	44	45	43	50	Arterial	550	4
Carpenter Rd. SE	37th Ave. SE	32nd Ave. SE	36	38	41	39	44	Arterial	1510	3
Carpenter Rd. SE	Long Lake Park Entrance	26th Ct. SE	77	77	78	35	21	Arterial	1090	18
Carpenter Rd. SE	City Limits	Diamond Rd. SE	74	79	82	83	83	Arterial	1820	18
Carpenter Rd. SE	Diamond Rd. SE	Alanna Dr. SE	80	81	82	82	78	Arterial	910	23
Carpenter Rd. SE	Mills Landing Ct. SE	Carpenter Rd. SE	76	76	77	74	78	Residential	675	23
Carpenter Rd. SE	Pacific Ave. SE	City Limits	92	93	95	92	95	Arterial	680	24
Carpenter Rd. SE	6th Ave. SE	5th Way SE	92	93	95	92	95	Arterial	840	24
Carpenter Rd. SE	5th Way SE	City Limits	92	93	95	92	95	Arterial	1010	24
Carpenter Rd. SE	Alanna Dr. SE	Woodland Trail Crossing	75	77	78	78	74	Arterial	780	17
Carpenter Rd. SE	Woodland Trail Crossing	Pacific Ave. SE	92	93	95	92	95	Arterial	510	29
Cashmere Dr. NE	Dominion Ave. NE	Rushmore Ave. NE	89	89	89	89	86	Residential	1348	32
Cashmere Dr. NE	Rushmore Ave. NE	Columbia Way NE	88	88	89	88	86	Residential	1097	31
Catalina Dr. SE	Belair Dr. SE	End of Road	85	86	87	83	83	Residential	430	42
Cedar Ct. SE	43rd Ave. SE	End of Road	74	76	77	77	81	Residential	550	22
Cedar Hills Ct. SE	28th Ave. SE	End of Road	75	77	78	79	81	Residential	600	23
Cedarbough Ct. NE	Campus Dr. NE	End of Road	95	96	98	100	100	Residential	190	34
Century Ct. NE	15th Ave. NE	End of Road	66	66	67	68	73	Residential	1020	18

Pavement Condition Categories

- PCI 85 – 100 = "Very Good" 
- PCI 60 – 84 = "Good" 
- PCI 40 – 59 = "Fair" 
- PCI 0 – 39 = "Poor" 

This page intentionally left blank.

Street Name	Begin Location	End Location	2018	2017	2016	2015	2014	Func. Class	Length (ft)	RSL
03rd Ave. SE	I-5 Corridor	College St. SE	97	97	100	100	71	Arterial	1280	29
04th Ave. SE	College St. SE	End of Road	83	85	85	85	86	Collector	380	17
05th Ct. SE	Kinwood Rd. SE	End of Road	78	79	80	80	82	Residential	540	25
05th Way SE	Carpenter Rd. SE	Glen Ct. SE	77	80	81	79	83	Residential	1150	24
05th Way SE	Glen Ct. SE	Kinwood Rd. SE	73	76	78	77	79	Residential	1260	22
06th Ave. NE	Sleater Kinney Rd. NE	Enterprise Dr. NE	60	61	61	59	61	Collector	1340	8
06th Ave. NE	Enterprise Dr. NE	College St. NE	60	61	63	60	59	Collector	1220	8
06th Ave. SE	Sleater Kinney Rd. SE	Golf Club Rd. SE	85	85	85	83	87	Collector	1280	29
06th Ave. SE	Golf Club Rd. SE	College St. SE	83	83	85	84	87	Collector	1280	27
06th Ave. SE	Carpenter Rd. SE	End of Road	94	95	97	97	100	Residential	880	34
07th Ave. NE	End of Road	End of Road	63	64	66	67	70	Residential	570	16
07th Ave. SE	Sleater Kinney Rd. SE	Golf Club Rd. SE	76	78	81	81	83	Collector	1400	20
07th Ave. SE	Golf Club Rd. SE	College St. SE	81	82	82	82	80	Collector	1300	16
07th Ave. SE	Bowker St. SE	Lacey St. SE	95	96	97	100	100	Residential	710	34
07th Ave. SE	Lacey St. SE	Ulery St. SE	94	96	97	100	100	Residential	760	34
07th Ave. SE	Ulery St. SE	Carpenter Rd. SE	95	96	97	100	100	Residential	840	34
08th Ave. NE	College St. NE	Livingston St. NE	82	83	84	84	86	Residential	1200	38
08th Ave. SE	Sleater Kinney Rd. SE	End of Road	20	21	23	23	21	Collector	600	0
10th Ave. SE	Golf Club Rd. SE	End of Road	87	87	87	85	86	Residential	265	30
12th Ave. SE	Sleater Kinney Rd. SE	End of Road	77	77	79	79	83	Residential	1200	24
13th Ave. SE	Willow St. SE	Golf Club Rd. SE	87	88	88	87	85	Residential	410	34
13th Ave. SE	Crowe St. SE	College St. SE	85	86	87	85	86	Residential	870	41
13th Ave. SE	Clearbrook Dr. SE	Glen Mary Dr. SE	90	91	93	91	90	Residential	840	40
13th Ct. SE	College St. SE	End of Road	40	30	31	34	39	Residential	280	5
14th Ave. NE	Galaxy Dr. NE	End of Road	75	77	78	78	80	Residential	240	25
14th Ave. SE	Western City Limits	Sleater Kinney Rd. SE	86	87	87	85	87	Collector	1300	30
14th Ave. SE	Sleater Kinney Rd. SE	Golf Club Rd. SE	83	82	82	82	83	Collector	1300	25
14th Ave. SE	Golf Club Rd. SE	College St. SE	82	81	82	80	83	Collector	1300	26
14th Ave. SE	College St. SE	Ruddell Rd. SE	100	65	67	67	67	Residential	1300	34
14th Ave. SE	Ruddell Rd. SE	15th Ave. SE	70	74	77	80	89	Residential	960	19
14th Ave. SE	Alder St. SE	Lebanon St. SE	87	87	90	88	87	Residential	700	30
14th Ave. SE	Lebanon St. SE	Clearbrook Dr. SE	80	82	84	84	85	Residential	810	26
14th Ave. SE	Carpenter Rd. SE	Nobel Firs Ct. SE	82	83	84	81	80	Residential	550	27
14th Ave. SE	Nobel Firs Ct. SE	End of Road	82	85	85	82	84	Residential	1500	27
14th Ct. SE	14th Ave. SE	End of Road	88	89	89	86	87	Residential	680	31
14th Way SE	Willow St. SE	Golf Club Rd. SE	89	92	92	87	89	Residential	490	35
14th Way SE	Golf Club Rd. SE	College St. SE	89	89	89	88	89	Residential	1280	35
15th Ave. SE	Golf Club Rd. SE	College St. SE	85	85	85	85	87	Residential	1300	33

Street Name	Begin Location	End Location	2018	2017	2016	2015	2014	Func. Class	Length (ft)	RSL
15th Ave. SE	Ruddell Rd. SE	End of Road	90	91	92	90	90	Residential	640	32
15th Ave. SE	Ruddell Rd. SE	Gemini St. SE	90	91	92	89	89	Residential	800	36
15th Ave. SE	Homann Dr. SE	Alanna Dr. SE	86	87	87	85	87	Residential	810	34
15th Ave. SE	Nobel Firs Ct. SE	End of Road	84	85	85	82	86	Residential	620	29
15th Ct. SE	15th Ave. SE	End of Road	86	87	87	86	86	Residential	180	30
16th Ave. SE	Sleater Kinney Rd. SE	End of Road	100	64	66	68	73	Residential	680	34
16th Ave. SE	Golf Club Rd. SE	College St. SE	78	81	83	82	86	Residential	1270	27
16th Ave. SE	College St. SE	Judd St. SE	89	91	92	89	90	Residential	1300	35
16th Ave. SE	Sulky Dr. SE	Clearbrook Dr. SE	71	73	74	74	75	Residential	480	20
16th Ave. SE	Homann Dr. SE	Alanna Dr. SE	84	86	87	85	86	Residential	750	32
16th Ct. SE	16th Ave. SE	End of Road	75	77	78	79	76	Residential	210	23
16th Way SE	Judd St. SE	Ruddell Rd. SE	91	91	93	90	90	Residential	120	36
17th Ave. SE	College St. SE	West End of Road	89	91	91	86	87	Residential	590	35
17th Ave. SE	College St. SE	East End of Road	100	54	57	56	60	Residential	970	34
17th Ave. SE	Homann Dr. SE	Alanna Dr. SE	84	86	87	85	86	Residential	690	32
17th Ct. SE	Clearbrook Dr. SE	End of Road	69	70	72	72	76	Residential	150	19
18th Ave. SE	College St. SE	End of Road	93	65	69	70	72	Residential	1100	33
18th Ave. SE	Judd St. SE	Ruddell Rd. SE	89	92	93	90	90	Residential	370	31
18th Ave. SE	Sulky Dr. SE	17th Ct. SE	62	62	65	64	68	Residential	720	15
18th Ave. SE	Homann Dr. SE	Alanna Dr. SE	84	85	87	85	84	Residential	630	32
19th Ave. SE	Golf Club Rd. SE	College St. SE	100	59	62	65	68	Residential	1300	34
19th Ave. SE	Judd St. SE	End of Road	90	91	91	88	89	Residential	630	32
19th Ave. SE	Judd St. SE	Ruddell Rd. SE	91	92	93	90	90	Residential	570	32
19th Ave. SE	Sulky Dr. SE	Hanover Dr. SE	67	70	72	71	72	Residential	1100	18
19th Ct. SE	19th Ave. SE	End of Road	66	67	67	68	72	Residential	370	17
20th Ave. SE	Judd St. SE	End of Road	90	91	91	87	86	Residential	630	36
20th Ave. SE	Sycamore Dr. SE	Sulky Dr. SE	69	70	72	73	69	Residential	1000	18
20th Ave. SE	Sulky Dr. SE	Hanover Dr. SE	61	62	64	64	69	Residential	740	15
21st Ave. SE	West Lake Dr. SE	Sleater Kinney Rd. SE	89	84	86	87	90	Residential	830	36
21st Ave. SE	Sleater Kinney Rd. SE	Golf Club Rd. SE	93	58	60	60	60	Collector	1280	30
21st Ave. SE	Judd St. SE	End of Road	87	89	89	87	89	Residential	620	34
21st Ave. SE	Judd St. SE	Ruddell Rd. SE	87	89	89	90	92	Residential	1070	41
21st Ct. SE	Golf Club Rd. SE	End of Road	69	72	73	75	78	Residential	520	18
22nd Ave. SE	Golf Club Rd. SE	College St. SE	87	88	88	85	85	Collector	1270	27
22nd Ave. SE	College St. SE	Judd St. SE	87	85	85	83	86	Collector	1280	27
22nd Ave. SE	Judd St. SE	Ruddell Rd. SE	89	89	89	87	87	Collector	1260	28
22nd Ave. SE	Ruddell Rd. SE	Larch St. SE	84	85	85	77	74	Collector	1010	25
22nd Ave. SE	Larch St. SE	Lilac St. SE	83	82	82	78	74	Collector	1130	25

Street Name	Begin Location	End Location	2018	2017	2016	2015	2014	Func. Class	Length (ft)	RSL
22nd Ave. SE	Agate Ct. SE	Diamond Lp. SE	81	81	80	81	83	Residential	770	27
22nd Ct. SE	22nd Ave. SE	End of Road	79	80	80	81	84	Residential	290	25
23rd Ave. SE	Golf Club Rd. SE	College St. SE	84	86	88	83	85	Residential	1270	39
23rd Ave. SE	College St. SE	Judd St. SE	99	100	100	67	67	Residential	1280	34
23rd Ave. SE	Judd St. SE	Brentwood Pl. SE	99	100	100	67	67	Residential	460	34
23rd Ave. SE	Brentwood Pl. SE	25th Ave. SE	99	100	100	55	57	Residential	1150	34
24th Ave. SE	Golf Club Rd. SE	College St. SE	73	75	77	77	79	Residential	1270	22
24th Ave. SE	College St. SE	Judd St. SE	99	100	100	66	70	Residential	1280	34
24th Ave. SE	Brentwood Pl. SE	23rd Ave. SE	91	92	93	91	89	Residential	720	32
24th Ave. SE	23rd Ave. SE	Ruddell Rd. SE	89	90	91	91	89	Residential	370	31
25th Ave. SE	College St. SE	Judd St. SE	99	100	100	77	81	Residential	1280	34
25th Ave. SE	Judd St. SE	Brentwood Pl. SE	90	90	91	88	87	Residential	470	36
25th Ave. SE	Brentwood Pl. SE	25th Ct. SE	91	91	93	80	82	Residential	1090	36
25th Ave. SE	Ruddell Rd. SE	Angela St. SE	82	83	84	83	81	Collector	740	24
25th Ave. SE	Angela St. SE	Lilac St. SE	73	76	78	77	76	Collector	870	19
25th Ave. SE	Lilac St. SE	End of Road	51	54	57	58	61	Residential	480	10
25th Ct. SE	25th Ave. SE	End of Road	77	78	78	78	81	Residential	440	24
25th Lp. SE	25th Ave. SE	25th Ave. SE	83	85	87	86	83	Residential	1640	28
26th Ave. SE	Golf Club Rd. SE	College St. SE	86	87	89	85	87	Residential	1420	43
26th Ave. SE	College St. SE	Judd St. SE	99	100	100	72	70	Residential	1300	34
26th Ave. SE	Judd St. SE	Brentwood Dr. SE	98	100	100	64	70	Residential	1270	34
26th Ct. SE	Carpenter Rd. SE	End of Road	86	87	87	84	86	Residential	450	30
26th Lp. SE	26th Ave. SE	26th Ave. SE	85	86	87	87	84	Residential	1150	41
27th Ave. SE	Sunset Dr. SE	Brentwood Dr. SE	99	100	100	59	63	Residential	850	34
27th Ave. SE	Brentwood Dr. SE	Ruddell Rd. SE	98	100	100	66	69	Residential	550	34
27th Ct. SE	College St. SE	End of Road	84	85	86	84	86	Residential	530	38
27th Ct. SE	Judd St. SE	End of Road	78	80	80	82	81	Residential	270	24
28th Ave. SE	College St. SE	Impala Dr. SE	76	77	77	78	82	Residential	1190	23
28th Ave. SE	Sunset Dr. SE	Brentwood Dr. SE	99	100	100	62	68	Residential	920	34
28th Ct. NE	Hogum Bay Rd. NE	End of Road	87	87	87	84	85	Residential	1160	30
29th Ave. NE	Marvin Rd. NE	End of Road	76	76	77	76	78	Residential	1110	24
29th Ave. SE	Lakeview Dr. SE	College St. SE	67	69	71	71	74	Residential	1220	19
29th Ct. SE	29th Ave. SE	End of Road	69	71	72	74	74	Residential	210	19
29th Ct. SE	Ruddell Rd. SE	End of Road	87	90	91	89	86	Residential	350	30
30th Ave. NE	Hogum Bay Rd. NE	End of Road	64	64	66	64	73	Residential	900	16
30th Ave. SE	Lakeview Dr. SE	29th Ave. SE	63	64	64	66	69	Residential	980	16
30th Ave. SE	Ruddell Rd. SE	End of Road	63	65	66	65	66	Residential	740	16
30th Ave. SE	Hicks Lake Rd. SE	End of Road	48	52	53	52	64	Residential	620	8

Street Name	Begin Location	End Location	2018	2017	2016	2015	2014	Func. Class	Length (ft)	RSL
30th Ct. SE	Impala Dr. SE	End of Road	82	83	85	83	87	Residential	450	36
31st Ave. NE	Hogum Bay Rd. NE	Hanna Ct. NE	39	41	42	42	42	Collector	1320	3
31st Ave. NE	Hanna Ct. NE	Williamette Dr. NE	83	83	84	82	86	Collector	1740	17
31st Ave. NE	Williamette Dr. NE	Deni Dr. NE	85	85	86	84	86	Collector	1770	18
31st Ave. NE	Deni Dr. NE	Meridian Rd. NE	91	93	94	95	100	Collector	1820	23
31st Ave. SE	College St. SE	Impala Dr. SE	85	85	83	82	84	Residential	990	41
31st Ct. SE	31st Ave. SE	End of Road	84	85	85	86	87	Residential	170	40
32nd Ave. NE	Bonanza Dr. NE	East End of Eagle Ct. Plat	87	89	89	89	92	Residential	965	30
32nd Ave. NE	Marvin Rd. NE	East End of Eagle Ct. Plat	81	82	82	81		Residential	1430	27
32nd Ave. SE	Impala Dr. SE	Stikes Dr. SE	91	92	93	89	92	Residential	290	50
32nd Ave. SE	Carpenter Rd. SE	Long Lake Dr. SE	86	89	89	87	84	Residential	1000	30
32nd Ct. SE	Impala Dr. SE	End of Road	86	87	88	88	86	Residential	130	43
32nd Ct. SE	Ruddell Rd. SE	West End of Road	63	65	65	65	68	Residential	450	16
32nd Ct. SE	Ruddell Rd. SE	East End of Road	74	76	77	76	78	Residential	600	22
33rd Ave. NE	Bali St. NE	Mia St. NE	91	92	92	88	89	Residential	975	32
33rd Ave. SE	Ida Jane Way SE	Stanfield Rd. SE	85	87	89	87	87	Residential	1280	42
33rd Ave. SE	Stanfield Rd. SE	Carpenter Rd. SE	71	72	72	71	72	Residential	1300	20
33rd Ct. SE	Impala Dr. SE	West End of Road	84	85	85	86	88	Residential	130	40
33rd Ct. SE	Impala Dr. SE	East End of Road	86	87	89	87	86	Residential	180	43
33rd Ct. SE	Stikes Dr. SE	West End of Road	71	71	73	75	80	Residential	320	20
33rd Ct. SE	Stikes Dr. SE	East End of Road	64	64	66	67	71	Residential	310	16
33rd Ct. SE	Ruddell Lp. SE	End of Road	84	86	86	84	86	Residential	1300	28
33rd Lp. SE	33rd Ave. SE	33rd Ave. SE	65	66	67	66	70	Residential	1200	17
33rd Way NE	Bali St. NE	Marvin Rd. NE	91	92	92	88	89	Residential	1175	32
34th Ave. NE	Bali St. NE	Kona St. NE	92	93	93	89	89	Residential	600	33
34th Ave. SE	Stikes Dr. SE	Ruddell Lp. SE	71	71	73	73	73	Residential	1500	20
34th Ave. SE	Ida Jane Way SE	Stanfield Rd. SE	84	85	87	85	86	Residential	1080	40
34th Ave. SE	Stanfield Rd. SE	East End of Road	88	88	88	85	87	Residential	230	31
34th Ct. SE	Impala Dr. SE	West End of Road	82	83	85	84	88	Residential	130	36
34th Ct. SE	Impala Dr. SE	East End of Road	84	85	85	84	85	Residential	180	40
35th Ave. SE	"Lakeview Estates" HOA	35th Ct. SE	69	71	73	73	76	Residential	780	21
35th Ave. SE	Ida Jane Way SE	Stanfield Rd. SE	92	93	94	94	95	Residential	1150	33
35th Ave. SE	Meadow Lake St. SE	"Lakeview Estates" HOA	93	95	95	93	95	Residential	330	33
35th Ct. SE	35th Ave. SE	End of Road	62	64	66	66	71	Residential	270	16
36th Ave. SE	Ida Jane Way SE	End of Road	92	93	95	94	95	Residential	600	37
36th Ave. SE	Ida Jane Way SE	Stanfield Rd. SE	92	93	95	94	95	Residential	1280	37
36th Ct. SE	Lakecrest Dr. SE	West End of Road	55	58	59	62	67	Residential	160	12
36th Ct. SE	Lakecrest Dr. SE	East End of Road	60	60	61	63	69	Residential	210	15

Street Name	Begin Location	End Location	2018	2017	2016	2015	2014	Func. Class	Length (ft)	RSL
36th Ct. SE	Banbury Pl. SE	End of Road	86	87	87	85	85	Residential	430	30
37th Ave. SE	Western City Limits	Ingleside Dr. SE	75	75	75	77	72	Arterial	1280	17
37th Ave. SE	Ingleside Dr. SE	College St. SE	85	86	86	86	78	Arterial	1300	21
37th Ave. SE	Stikes Dr. SE	End of Road	78	81	81	81	84	Residential	1570	25
37th Ave. SE	Ruddell Rd. SE	Apollo St. SE	75	77	77	77	77	Residential	870	29
37th Ave. SE	Apollo St. SE	End of Road	86	88	89	87	87	Residential	900	33
37th Ave. SE	Stanfield Rd. SE	Carpenter Rd. SE	93	93	94	93	96	Residential	1300	33
37th Ct. SE	Ruddell Rd. SE	End of Road	59	62	65	65	69	Residential	270	14
37th Ct. SE	Arbor Dr. SE	End of Road	79	80	80	79	82	Residential	160	25
38th Ave. SE	Stanfield Rd. SE	End of Road	93	93	95	94	92	Residential	1570	33
38th Ct. SE	Ruddell Rd. SE	End of Road	64	66	67	68	73	Residential	290	16
38th Ct. SE	Arbor Dr. SE	West End of Road	78	79	79	79	84	Residential	180	25
38th Ct. SE	Arbor Dr. SE	East End of Road	80	81	81	77	79	Residential	210	26
38th Dr. SE	Stanfield Rd. SE	38th Lp. SE	77	78	78	80	83	Residential	620	24
38th Dr. SE	38th Lp. SE	Carpenter Rd. SE	74	74	77	78	80	Residential	1000	22
38th Dr. SE	Carpenter Rd. SE	39th Ave. SE	80	81	81	79	83	Residential	870	26
38th Lp. SE	38th Dr. SE	38th Dr. SE	75	76	77	77	79	Residential	1090	23
38th Way NE	Marvin Rd. NE	End of Road	92	92	92	89	90	Residential	520	33
39th Ave. SE	College St. SE	Stikes Dr. SE	77	71	72	71	74	Residential	770	24
39th Ave. SE	Stikes Dr. SE	Stikes Dr. SE	77	73	74	76	84	Residential	940	24
39th Ave. SE	Mullen Rd. SE	Koala St. SE	80	81	79	78	82	Residential	520	26
39th Ave. SE	39th Ave. SE	Ruddell Rd. SE	80	81	76	77	81	Residential	1200	26
39th Ave. SE	Ruddell Rd. SE	Apollo St. SE	78	72	75	72	75	Residential	810	25
39th Ave. SE	Arbor Dr. SE	End of Road	83	84	84	82	80	Residential	890	28
39th Ct. SE	39th Ave. SE	End of Road	81	77	77	79	83	Residential	130	26
39th Ct. SE	Arbor Dr. SE	End of Road	82	83	83	81	82	Residential	120	27
39th Ct. SE	Carpenter Rd. SE	End of Road	87	87	87	86	86	Residential	570	30
40th Ct. SE	Ruddell Rd. SE	End of Road	79	79	82	79	82	Residential	500	25
41st Ave. NE	Whidbey Rd. NE	Meriwood Dr. NE	89	89	90	87	87	Arterial	1340	23
41st Ave. NE	Vashon Dr. NE	Whidbey Rd. NE	89	89	90	87	87	Arterial	1020	23
41st Ave. NE	Edgewater Blvd. NE	Vashon Dr. NE	88	90	91	88	87	Arterial	2170	23
41st Ave. NE	Marvin Rd. NE	Edgewater Blvd. NE	83	87	89	86	87	Arterial	770	21
41st Ave. SE	Stikes Dr. SE	Quail Dr. SE	84	85	85	85	87	Residential	690	28
41st Ave. SE	City Limits	Carpenter Rd. SE	87	88	89	88	90	Residential	1380	34
41st Ave. SE	Carpenter Rd. SE	Arbor Dr. SE	91	93	95	92	95	Residential	1030	32
41st Ave. SE	Galena St. SE	College St. SE	89	90	91	89	90	Residential	180	31
43rd Ave. SE	Quail Dr. SE	Park Place Lp. SE	89	89	90	87	87	Residential	240	31
43rd Ave. SE	Carpenter Rd. SE	Juniper Ct. SE	77	79	79	79	82	Residential	850	24

Street Name	Begin Location	End Location	2018	2017	2016	2015	2014	Func. Class	Length (ft)	RSL
43rd Ct. SE	Park Place Lp. SE	End of Road	85	87	87	86	87	Residential	490	29
44th Ct. SE	Greenbriar St. SE	West End of Road	83	83	83	83	86	Residential	670	28
44th Ct. SE	Greenbriar St. SE	East End of Road	88	88	88	87	86	Residential	450	31
45th Ave. SE	Western City Limits	Seville Dr. SE	85	87	87	84	85	Collector	970	18
45th Ave. SE	Seville Dr. SE	College St. SE	82	82	83	84	86	Collector	1360	16
45th Ave. SE	College St. SE	Stikes Dr. SE	86	86	87	86	87	Collector	920	26
45th Ave. SE	Stikes Dr. SE	Parkside Dr. SE	84	86	87	85	87	Collector	820	25
45th Ave. SE	Parkside Dr. SE	Greenbriar St. SE	83	85	87	85	87	Collector	1010	25
45th Ave. SE	Greenbriar St. SE	Ruddell Rd. SE	84	86	87	85	87	Collector	860	25
45th Ave. SE	Carpenter Rd. SE	End of Road	60	63	66	67	71	Residential	220	13
46th Ave. NE	Hilton Rd. NE	Meridian Rd. NE	87	87	88	88	89	Residential	2370	37
46th Ave. SE	Timothy St. SE	Colleen Ct. SE	92	94	95	94	95	Residential	300	33
47th Ave. SE	Seville Dr. SE	Stonegate St. SE	88	91	91	91	89	Residential	480	31
47th Ave. SE	Stikes Dr. SE	Parkside Dr. SE	84	85	85	83	83	Residential	780	28
47th Ave. SE	Rochelle St. SE	Colleen Ct. SE	93	95	95	94	95	Residential	525	33
48th Ave. SE	Rosemont Ct. SE	Crosswaters St. SE	86	87	87	85	86	Residential	790	30
48th Ave. SE	Crosswaters St. SE	End of Road	87	87	87	86	86	Residential	810	30
48th Lp. SE	48th Ave. SE	48th Ave. SE	87	88	88	87	86	Residential	990	30
49th Ave. SE	Boardwalk St. SE	Parkside Dr. SE	100	100				Residential	930	34
50th Ave. SE	College St. SE	Boardwalk St. SE	86	87	87	87	85	Residential	860	30
50th Ave. SE	Ruddell Rd. SE	End of Road	81	75	76	76	67	Residential	1220	26
50th Ct. SE	50th Ave. SE	End of Road	82	83	83	83	86	Residential	540	27
51st Way SE	Boardwalk St. SE	Andrew St. SE	96	97	98	100	100	Residential	420	34
52nd Way SE	Boardwalk St. SE	Andrew St. SE	96	97	98	98	100	Residential	415	34
53rd Ave. SE	College St. SE	Boardwalk St. SE	87	89	89	88	88	Collector	980	19
53rd Ave. SE	Lakehills St. SE	End of Road	80	81	83	82	81	Residential	190	26
53rd Ave. SE	Boardwalk St. SE	Parkside Dr. SE	89	89	89	90	89	Collector	455	20
54th Ave. SE	Mt. Tahoma Dr. SE	Ruddell Rd. SE	89	87	89	87	87	Residential	1420	35
54th Ave. SE	Ruddell Rd. SE	Thornbury Dr. SE	86	87	86	86	87	Collector	980	21
54th Ave. SE	Thornbury Dr. SE	Stockton St. SE	79	80	80	80	80	Residential	1220	25
54th Ave. SE	Boardwalk St. SE	Summerwalk St. SE	84	86	86	87	87	Residential	470	34
54th Ct. SE	Emerald St. SE	End of Road	74	75	76	77	81	Residential	310	22
54th Way SE	Topaz St. SE	Emerald St. SE	68	68	70	71	80	Residential	730	18
55th Ave. SE	Boardwalk St. SE	Summerwalk St. SE	88	89	89	88	87	Residential	510	31
55th Ct. SE	Emerald St. SE	End of Road	73	74	75	76	81	Residential	260	21
55th Way SE	Topaz St. SE	Emerald St. SE	74	76	77	78	83	Residential	740	22
56th Ave. SE	Mt. Baker St. SE	Ruddell Rd. SE	85	85	87	86	86	Residential	1140	29
56th Ave. SE	Boardwalk St. SE	Parkside Dr. SE	86	86	88	86	87	Residential	735	37

Street Name	Begin Location	End Location	2018	2017	2016	2015	2014	Func. Class	Length (ft)	RSL
56th Lp. SE	56th Ave. SE	56th Ave. SE	86	87	87	85	87	Residential	800	37
57th Ave. SE	Mt. Baker St. SE	Mt. Adams St. SE	85	85	87	86	85	Residential	1090	29
57th Ave. SE	Emerald St. SE	Thornbury Dr. SE	81	83	83	83	85	Residential	470	26
57th Ave. SE	Thornbury Dr. SE	Stockton St. SE	83	81	83	82	85	Residential	1280	28
57th Ave. SE	Stockton St. SE	Vincent Ct. SE	81	84	85	84	83	Residential	810	26
57th Ave. SE	Vincent Ct. SE	Rumac St. SE	85	87	88	85	85	Residential	530	29
57th Ct. SE	Stockton St. SE	End of Road	85	87	88	85	86	Residential	370	29
57th Ct. SE	Rumac St. SE	End of Road	85	87	87	85	84	Residential	400	29
57th Lp. SE	57th Way SE	57th Way SE	88	89	89	89	89	Residential	545	31
57th Way SE	Parkside Dr. SE	Mt. Baker St. SE	84	85	85	85	86	Residential	1030	28
58th Ave. SE	Opal Ct. SE	Thornbury Dr. SE	79	80	82	83	80	Residential	1060	25
58th Ave. SE	57th Ave. SE	Stockton St. SE	82	84	85	83	84	Residential	1180	27
58th Ct. SE	57th Ave. SE	End of Road	85	87	88	85	85	Residential	460	29
59th Lp. SE	Stockton St. SE	Stockton St. SE	80	80	82	81	85	Residential	1270	26
60th Ave. SE	Stockton St. SE	Compton Blvd. SE	82	84	84	82	83	Residential	1090	27
60th Ct. SE	Thornbury Dr. SE	End of Road	83	84	84	84	86	Residential	420	28
60th Lp. SE	Stockton St. SE	Stockton St. SE	82	82	84	84	80	Residential	1270	27
61st Ave. SE	Thornbury Pl. SE	61st Lp. SE	84	86	86	84	85	Residential	1140	28
61st Ave. SE	61st Lp. SE	Stockton St. SE	84	86	86	85	85	Residential	560	28
61st Lp. SE	61st Ave. SE	Stockton St. SE	84	86	86	85	85	Residential	740	28
66th Ave. SE	Rainier Rd. SE	Sarazen St. SE	81	83	83	81	82	Collector	910	16
66th Ave. SE	Ruddell Rd. SE	Balustrade Blvd. SE	86	87	86	87	89	Residential	1200	37
66th Ave. SE	Sarazen St. SE	5319 66th Ave. SE	84	84	85	83	85	Collector	1840	17
66th Ave. SE	5319 66th Ave. SE	Ruddell Rd. SE	76	71	72	73	69	Collector	1150	14
66th Way SE	Bailey St. SE	End of Road	84	85	85	85	84	Residential	650	34
67th Ave. SE	Western City Limits	Rainier Rd. SE	76	77	79	78	81	Collector	1210	14
70th Ave. SE	Radius Lp. SE	Bailey St. SE	88	88	89	88	88	Residential	1150	31
70th Way SE	Rainier Rd. SE	Radius Lp. SE	85	85	85	85	75	Residential	450	36
70th Way SE	Bailey St. SE	Radius Lp. SE	88	88	89	88	87	Residential	790	31
71st Ave. SE	Compass St. SE	Bailey St. SE	86	88	88	86	89	Residential	1370	38
Abbey Way SE	College St. SE	Baran Dr. SE	88	88	88	86	87	Collector	460	19
Abigail Ct. NE	Campus Park Dr. NE	End of Road	95	96	97	97	100	Residential	335	34
Abigail Dr. NE	Campus Park Dr. NE	Campus Highlands Dr. NE	95	96	97	98	100	Residential	1100	34
Adonis Ave. NE	Hercules Dr. NE	Juno St. NE	96	98	100	100		Residential	440	34
Adonis Ct. NE	Juno St. NE	End of Road	96	97	100	100		Residential	470	34
Afflerbaugh Dr. SE	Mullen Rd. SE	City Limits	79	81	82	78	80	Residential	1020	25
Agate Ct. SE	22nd Ave. SE	End of Road	80	80	78	79	81	Residential	240	26
Alabaster St. SE	Sandstone St. SE	Kapalea Way SE	90	90	91	89	87	Residential	450	32

Street Name	Begin Location	End Location	2018	2017	2016	2015	2014	Func. Class	Length (ft)	RSL
Alanna Dr. SE	Lacey Elementary School	Carpenter Rd. SE	93	94	94	94	100	Residential	1380	37
Aldea Ct. SE	5th Way SE	End of Road	82	82	82	82	84	Residential	580	27
Alder St. SE	Sycamore Dr. SE	14th Ave. SE	88	89	91	90	89	Residential	1610	35
Alder St. SE	14th Ave. SE	Lacey Blvd. SE	86	87	89	88	88	Residential	520	42
Alexander Dr. NE	Mercedes Dr. NE	Mercedes Dr. NE	81	83	85	85	85	Residential	1040	27
Alhadeff St. SE	Pacific Ave. SE	End of public street (sign)	83	85	85	85	85	Residential	400	28
Alpha St. SE	Chambers Lake Dr. SE	21st Ave. SE	85	85	88	87	89	Residential	1250	41
Amelia Ct. NE	End of Road	End of Road	95	95	95	95	92	Residential	950	34
Anderson Ct. NE	Meriwood Dr. NE	End of Road	95	97	98	100	100	Residential	1550	34
Andress St. NE	Spencer Ave. NE	Hayworth Ave. NE	93	92	92	89	90	Residential	500	33
Andrew St. SE	52nd Way SE	49th Ave. SE	98	99	98	100	100	Residential	720	34
Angela St. SE	25th Lp. SE	25th Ave. SE	79	80	82	82	85	Residential	460	34
Angela St. SE	25th Ave. SE	22nd Ave. SE	86	87	87	85	87	Residential	990	34
Apollo St. SE	39th Ave. SE	End of Road	83	76	77	77	81	Residential	430	28
Apollo St. SE	39th Ave. SE	37th Ave. SE	76	73	75	75	77	Residential	980	23
Arbor Ct. SE	43rd Ave. SE	End of Road	67	70	73	76	79	Residential	200	18
Arbor Dr. SE	Juniper Ct. SE	41st Ave. SE	63	66	66	67	69	Residential	560	17
Arbor Dr. SE	41st Ave. SE	39th Ct. SE	73	75	76	75	79	Residential	670	22
Arbor Dr. SE	39th Ct. SE	37th Ct. SE	82	83	84	81	85	Residential	720	27
Arbor Dr. SE	37th Ct. SE	End of Road	78	79	80	77	81	Residential	890	25
Arcarro Ct. SE	Ruddell Rd. SE	End of Road	87	89	89	87	87	Residential	874	30
Astaire St. NE	Spencer Ave. NE	Hayworth Ave. NE	93	93	93	91	90	Residential	470	33
Atlas Ave. NE	Hercules Dr. NE	Willamette Dr. NE	96	98	100	100		Residential	690	34
Aurora St. NE	Deni Dr. NE	End of Road	95	97	99	98	100	Residential	560	34
Avonlea Dr. SE	45th Ave. SE	Kapalea Way SE	88	88	89	90	92	Residential	1140	31
Axis St. SE	Radius Lp. SE	Balustrade Blvd. SE	87	88	88	87	87	Residential	1600	30
Axis St. SE	Balustrade Blvd. SE	66th Ave. SE	87	89	90	88	87	Residential	660	30
Bacall St. NE	Spencer Ave. NE	38th Way NE	93	91	92	91	90	Residential	625	33
Bailey St. SE	Radius Lp. SE	Balustrade Blvd. SE	88	88	89	88	87	Residential	1380	31
Bailey St. SE	Balustrade Blvd. SE	66th Ave. SE	89	89	89	87	87	Residential	810	31
Bainbridge Ct. NE	Bainbridge Lp. NE	End of Road	86	86	87	87	86	Residential	650	30
Bainbridge Lp. NE	Jubilee Rd. NE	Jubilee Rd. NE	84	88	89	87	86	Residential	730	29
Bainbridge Lp. NE	Jubilee Rd. NE	Whidbey Rd. NE	88	88	87	87	85	Residential	880	31
Bainbridge Lp. NE	Whidbey Rd. NE	Whidbey Rd. NE	88	88	89	88	86	Residential	1160	31
Bainbridge Lp. NE	Whidbey Rd. NE	Jubilee Rd. NE	88	88	89	88	86	Residential	830	31
Balata Ct. NE	Campus Dr. NE	End of Road	95	96	98	100	100	Residential	260	34
Baldwin St. SE	Compton Blvd. SE	Steamer Dr. SE	87	88	89	88	87	Residential	210	30
Bali St. NE	33rd Ave. NE	34th Ave. NE	92	93	93	89	89	Residential	575	33

Street Name	Begin Location	End Location	2018	2017	2016	2015	2014	Func. Class	Length (ft)	RSL
Balustrade Blvd. SE	Rainier Rd. SE	Radius Lp. SE	83	85	85	85	87	Collector	720	19
Balustrade Blvd. SE	Radius Lp. SE	Radius Lp. SE	85	87	87	86	86	Collector	2320	18
Balustrade Blvd. SE	Radius Lp. SE	66th Ave. SE	85	86	88	89	92	Collector	2030	21
Balustrade Blvd. SE	66th Ave. SE	Yelm Hwy. SE	87	88	88	88	92	Collector	1660	19
Banbury Pl. SE	37th Ave. SE	36th Ct. SE	86	87	88	85	86	Residential	290	30
Barkley Rd. NE	Vancouver Dr. NE	Lewis Dr. NE	90	91	92	92	92	Residential	560	32
Beam St. SE	Radius Lp. SE	70th Way SE	88	89	89	88	87	Residential	280	31
Becket St. NE	Campus Glen Dr. NE	Fortman Dr. NE	90	91	91	89	87	Residential	570	32
Beemer Ct. NE	Classic Dr. NE	End of Road	80	80	81	81	84	Residential	280	26
Belair Dr. SE	College St. SE	Catalina Dr. SE	87	89	82	81	81	Residential	430	30
Belair Dr. SE	Catalina Dr. SE	Impala Dr. SE	87	89	83	82	79	Residential	770	34
Beltway Lp. SE	60th Ave. SE	60th Ave. SE	84	86	88	85	84	Residential	1260	28
Bend Ct. NE	Spokane St. NE	End of Road	89	89	90	89	87	Residential	275	32
Bend Dr. NE	Spokane St. NE	Spokane St. NE	88	89	89	88	87	Residential	1240	31
Bentley Ct. NE	Mercedes Dr. NE	End of Road	79	79	81	81	82	Residential	130	25
Beta St. SE	Chambers Lake Dr. SE	21st Ave. SE	86	87	89	85	89	Residential	1190	43
Beth Ct. NE	Deni Dr. NE	End of Road	86	89	91	91	92	Residential	420	30
Birdseye Ave. NE	Gateway Blvd. NE	Fiddleback St. NE	94	93	100	100		Collector	1110	27
Birdseye Ave. NE	Fiddleback St. NE	End of Road	96	98	100	100		Collector	625	24
Blackberry Ct. SE	47th Ave. SE	End of Road	89	89	91	87	86	Residential	460	31
Blade St. SE	Balustrade Blvd. SE	66th Ave. SE	89	89	89	88	87	Residential	680	31
Blakley Lp. NE	Vashon Dr. NE	Vashon Dr. NE	92	92	93	90	89	Residential	460	33
Blue Finch Ct. SE	39th Ave. SE	End of Road	81	78	78	77	80	Residential	200	26
Blue Jay Ct. SE	Gold Finch Dr. SE	End of Road	74	75	77	75	78	Residential	300	22
Blueberry Ct. SE	47th Ave. SE	South End of Road	89	90	91	88	86	Residential	250	31
Blueberry Ct. SE	47th Ave. SE	North End of Road	89	90	91	87	86	Residential	330	31
Boardwalk St. SE	56th Ave. SE	53rd Ave. SE	86	86	86	87	87	Residential	660	37
Boardwalk St. SE	53rd Ave. SE	49th Ave. SE	96	98	98	98	100	Residential	875	34
Bogey Dr. NE	Campus Park Dr. NE	Campus Highlands Dr. NE	98	100	100			Residential	1420	34
Boone St. SE	14th Ave. SE	End of Road	85	87	89	88	90	Residential	650	34
Boone St. SE	12th Ave. SE	End of Road	80	83	85	87	89	Residential	380	27
Borealis Ct. NE	Williamette Dr. NE	End of Road	83	84	86	85	87	Residential	1020	28
Bowker St. SE	Pacific Ave. SE	7th Ave. SE	89	91	94	97	100	Residential	1810	37
Breeze Dr. SE	Balustrade Blvd. SE	66th Way SE	88	89	89	88	89	Residential	1000	31
Brentwood Dr. SE	Ruddell Rd. SE	Wonderwood Park Entrance	98	100	100	58	64	Residential	750	34
Brentwood Dr. SE	Wonderwood Park Entrance	28th Ave. SE	98	100	100	72	78	Residential	620	34
Brentwood Dr. SE	28th Ave. SE	26th Ave. SE	98	100	100	55	59	Residential	610	34
Brentwood Dr. SE	26th Ave. SE	26th Ave. SE	98	100	100	70	73	Residential	1320	34

Street Name	Begin Location	End Location	2018	2017	2016	2015	2014	Func. Class	Length (ft)	RSL
Brentwood Pl. SE	Brentwood Dr. SE	23rd Ave. SE	98	100	100	58	64	Residential	790	34
Bretherton Ave. NE	McKinley St. NE	Cashmere Dr. NE	87	89	90	90	87	Residential	340	30
Bristonwood Dr. NE	Campus Highlands Dr. NE	Campus Highlands Dr. NE	95	96	98	100	100	Residential	670	34
Britton Pkwy. NE	Carpenter Rd. NE	Gateway Blvd. NE	85	86	87	83	85	Arterial	4325	22
Britton Pkwy. NE	Gateway Blvd. NE	Marvin Rd. NE	87	87	90	88	89	Arterial	3600	27
Brunswick St. SE	16th Ave. SE	South End of Road	100	77	79	80	82	Residential	300	34
Brunswick St. SE	16th Ave. SE	North End of Road	100	84	85	83	81	Residential	340	34
Budd Ct. NE	Stevens Dr. NE	End of Road	90	91	92	92	92	Residential	280	32
Burlwood St. NE	Birdseye Ave. NE	End of Road	96	98	100	100		Residential	680	34
Burton Ray St. NE	15th Ave. NE	End of Road	98	100	100			Residential	570	34
Callison Rd. NE	Britton Pkwy. NE	End of Road	88	89	89	87	87	Residential	685	31
Camano Ct. NE	Camano Lp. NE	End of Road	87	87	87	86	84	Residential	370	30
Camano Lp. NE	Camano Lp. NE	Camano Lp. NE	91	91	92	89	87	Residential	2330	33
Camano Lp. NE	Vashon Dr. NE	Camano Lp. NE	91	91	92	90	87	Residential	940	33
Camaro Ct. SE	31st Ave. SE	End of Road	84	85	86	83	86	Residential	260	40
Cameron Dr. NE	Campus Highlands Dr. NE	Windham Ct. NE	87	89	89	88	87	Residential	840	39
Cameron Dr. NE	Windham Ct. NE	Merrill Ct. NE	87	89	89	87	87	Residential	1450	39
Cameron Dr. NE	Merrill Ct. NE	Amelia Ct. NE	89	90	90	90	87	Residential	470	32
Campus Dr. NE	Campus Park Dr. NE	Deuce Ct. NE	95	96	98	98	100	Residential	1410	34
Campus Dr. NE	Deuce Ct. NE	Campus Highlands Dr. NE	95	96	98	98	100	Residential	1200	34
Campus Glen Dr. NE	Preston St. NE	Willamette Dr. NE	89	89	89	87	87	Residential	880	32
Campus Glen Dr. NE	Willamette Dr. NE	Lupine St. NE	86	86	87	85	86	Residential	1580	37
Campus Glen Dr. NE	Lupine St. NE	Campus Park Dr. NE	86	86	87	85	86	Residential	1530	37
Campus Glen Dr. NE	Preston St. NE	End of Road	98	100	100			Residential	700	34
Campus Green Ct. NE	Campus Green Dr. NE	End of Road	89	88	89	88	86	Residential	190	32
Campus Green Dr. NE	Williamette Dr. NE	Campus Green Ct. NE	85	86	88	87	86	Residential	840	29
Campus Green Dr. NE	Campus Green Ct. NE	Meriwood Dr. NE	88	89	89	87	86	Residential	710	31
Campus Green Lp. NE	Campus Green Dr. NE	Campus Green Dr. NE	88	89	89	86	86	Residential	1050	31
Campus Highlands Dr. NE	Willamette Dr. NE	Cameron Dr. NE	82	82	84	84	85	Residential	1750	31
Campus Highlands Dr. NE	Cameron Dr. NE	Campus Park Dr. NE	94	95	96	95	100	Residential	655	34
Campus Highlands Dr. NE	Campus Park Dr. NE	Shepard Way NE	95	96	98	96	100	Residential	1050	34
Campus Highlands Dr. NE	Shepard Way NE	Bogey Dr. NE	95	96	98	96	100	Residential	1020	34
Campus Highlands Dr. NE	Bogey Dr. NE	46th Ave. NE	95	96	98	96	100	Residential	1220	34
Campus Meadows Lp. NE	Campus Glen Dr. NE	Snowberry St. NE	85	87	87	86	86	Residential	685	35
Campus Meadows Lp. NE	Snowberry St. NE	Lupine St. NE	87	89	89	88	86	Residential	1065	39
Campus Park Dr. NE	Cameron Dr. NE	Campus Glen Dr. NE	87	87	89	87	87	Residential	975	39
Campus Park Dr. NE	Lewis Dr. NE	Meridian Dr. NE	87	87	89	86	86	Residential	750	30
Campus Park Dr. NE	Campus Glen Dr. NE	Lewis Dr. NE	89	89	89	86	87	Residential	1500	32

Street Name	Begin Location	End Location	2018	2017	2016	2015	2014	Func. Class	Length (ft)	RSL
Campus Park Dr. NE	Jude Ct. NE	Cameron Dr. NE	95	95	95	95	95	Residential	1230	34
Campus Park Dr. NE	Capri Ct. NE	Jude Ct. NE	95	95	95	95	95	Residential	340	34
Campus Park Dr. NE	Campus Highlands Dr. NE	Capri Ct. NE	95	95	97	96	100	Residential	1090	34
Campus Prairie Lp. NE	31st Ave. NE	31st Ave. NE	88	89	89	87	87	Residential	1346	31
Campus Willows Lp. NE	Willamette Dr. NE	Willamette Dr. NE	95	95	96	96	96	Residential	1150	34
Candace Ct. SE	Komachin Lp. SE	End of Road	79	81	81	81	83	Residential	420	30
Candlewood Ct. SE	Candlewood Dr. SE	End of Road	87	88	89	87	88	Residential	340	34
Candlewood Dr. SE	Timberline Dr. SE	Clearwater Dr. SE	87	89	91	91	89	Residential	450	34
Canton Ave. NE	Orcas St. NE	Orcas Lp. NE	89	90	91	91	90	Residential	540	41
Capri Ct. NE	Campus Park Dr. NE	End of Road	95	95	95	95	95	Residential	130	34
Capstan Dr. NE	Lanyard Dr. NE	Preston St. NE	90	91	91	89	87	Residential	360	32
Carolina St. SE	66th Ave. SE	Texas Ave. SE	89	89	89	89	92	Residential	540	31
Carpenter Ct. SE	Diamond Lp. SE	End of Road	84	85	86	84	85	Residential	190	29
Carpenter Hills Lp. SE	Carpenter Rd. SE	Carpenter Rd. SE	71	73	75	73	78	Residential	2550	20
Carpenter Rd. NE	City Limits	I-5 Corridor	81	83	85	85	87	Arterial	1360	24
Carpenter Rd. NE	I-5 Corridor	Gravel Ln. NE	84	84	87	85	87	Arterial	1020	21
Carpenter Rd. NE	Gravel Ln. NE	Britton Pkwy. NE	84	84	85	86	87	Arterial	1050	26
Carpenter Rd. SE	Mullen Rd. SE	45th Ave. SE	37	38	39	38	37	Arterial	830	3
Carpenter Rd. SE	45th Ave. SE	41st Ave. SE	41	44	45	47	46	Arterial	1180	4
Carpenter Rd. SE	41st Ave. SE	38th Dr. SE	43	45	48	49	52	Arterial	930	5
Carpenter Rd. SE	38th Dr. SE	37th Ave. SE	41	44	45	43	50	Arterial	550	4
Carpenter Rd. SE	37th Ave. SE	32nd Ave. SE	36	38	41	39	44	Arterial	1510	3
Carpenter Rd. SE	Long Lake Park Entrance	26th Ct. SE	77	77	78	35	21	Arterial	1090	18
Carpenter Rd. SE	City Limits	Diamond Rd. SE	74	79	82	83	83	Arterial	1820	18
Carpenter Rd. SE	Diamond Rd. SE	Alanna Dr. SE	80	81	82	82	78	Arterial	910	23
Carpenter Rd. SE	Mills Landing Ct. SE	Carpenter Rd. SE	76	76	77	74	78	Residential	675	23
Carpenter Rd. SE	Pacific Ave. SE	City Limits	92	93	95	92	95	Arterial	680	24
Carpenter Rd. SE	6th Ave. SE	5th Way SE	92	93	95	92	95	Arterial	840	24
Carpenter Rd. SE	5th Way SE	City Limits	92	93	95	92	95	Arterial	1010	24
Carpenter Rd. SE	Alanna Dr. SE	Woodland Trail Crossing	75	77	78	78	74	Arterial	780	17
Carpenter Rd. SE	Woodland Trail Crossing	Pacific Ave. SE	92	93	95	92	95	Arterial	510	29
Cashmere Dr. NE	Dominion Ave. NE	Rushmore Ave. NE	89	89	89	89	86	Residential	1348	32
Cashmere Dr. NE	Rushmore Ave. NE	Columbia Way NE	88	88	89	88	86	Residential	1097	31
Catalina Dr. SE	Belair Dr. SE	End of Road	85	86	87	83	83	Residential	430	42
Cedar Ct. SE	43rd Ave. SE	End of Road	74	76	77	77	81	Residential	550	22
Cedar Hills Ct. SE	28th Ave. SE	End of Road	75	77	78	79	81	Residential	600	23
Cedarbough Ct. NE	Campus Dr. NE	End of Road	95	96	98	100	100	Residential	190	34
Century Ct. NE	15th Ave. NE	End of Road	66	66	67	68	73	Residential	1020	17

Street Name	Begin Location	End Location	2018	2017	2016	2015	2014	Func. Class	Length (ft)	RSL
Chambers Lake Dr. SE	Golf Club Rd. SE	End of Road	71	72	74	74	80	Residential	1370	22
Chardonnay Dr. SE	Yelm Hwy. SE	Merlot Ln. SE	86	86	87	86	85	Residential	510	30
Chardonnay Dr. SE	Merlot Ln. SE	Rainier Lp. SE	88	88	89	86	86	Residential	1000	31
Charlotte Ct. SE	36th Ave. SE	End of Road	78	79	79	77	79	Residential	160	25
Cherokee Lp. SE	60th Ave. SE	60th Ave. SE	81	82	82	81	84	Residential	1280	27
Christa Dr. NE	Sebastian Dr. NE	31st Ave. NE	90	91	91	94	92	Residential	1220	32
Christine Ct. NE	Deni Dr. NE	End of Road	88	91	92	92	92	Residential	200	31
Church St. SE	14th Ave. SE	Lacey Blvd. SE	79	81	83	83	85	Residential	330	27
Citrine Ave. SE	Maricite St. SE	Shale St. SE	91	92	93	89	87	Residential	470	32
Classic Dr. NE	Deni Dr. NE	Mercedes Dr. NE	88	89	91	91	92	Residential	1020	31
Classic Dr. NE	Mercedes Dr. NE	Meridian Rd. NE	77	80	81	83	85	Residential	1300	24
Clearbrook Dr. SE	17th Ct. SE	Yonkers Dr. SE	74	77	80	82	92	Residential	890	22
Clearbrook Dr. SE	Yonkers Dr. SE	Lacey Blvd. SE	91	91	93	96	100	Residential	930	42
Clearbrook Dr. SE	Lacey Blvd. SE	Pacific Ave. SE	80	81	82	81	84	Collector	180	24
Clearwater Ct. SE	Clearwater Dr. SE	End of Road	75	77	77	78	73	Residential	115	26
Clearwater Dr. SE	Timberline Dr. SE	Clearwater Lp. SE	83	84	87	87	89	Residential	640	38
Clearwater Dr. SE	Clearwater Lp. SE	41st Ave. SE	87	88	89	89	90	Residential	1020	34
Clearwater Lp. SE	Clearwater Dr. SE	Clearwater Lp. SE	84	85	87	86	89	Residential	1740	40
Colleen Ct. SE	47th Ave. SE	End of Road	92	95	95	94	95	Residential	330	33
Colleen St. SE	47th Ave. SE	Natalee Dr. SE	93	95	95	94	95	Residential	420	33
College St. NE	Martin Way E	Park Center Ave. NE	68	71	73	73	77	Arterial	650	14
College St. NE	Park Center Ave. NE	6th Ave. NE	60	57	60	59	61	Arterial	1230	11
College St. NE	6th Ave. NE	8th Ave. NE	75	78	78	78	80	Arterial	540	17
College St. SE	Yelm Hwy. SE	Corporate Center Dr. SE	79	79	80	80	84	Arterial	1500	19
College St. SE	Corporate Center Dr. SE	50th Ave. SE	82	82	82	83	84	Arterial	700	20
College St. SE	50th Ave. SE	45th Ave. SE	82	82	83	83	85	Arterial	1640	20
College St. SE	45th Ave. SE	39th Ave. SE	76	76	77	77	79	Arterial	1320	17
College St. SE	39th Ave. SE	37th Ave. SE	78	78	79	79	79	Arterial	1210	18
College St. SE	37th Ave. SE	Montclair Dr. SE	77	78	77	77	78	Arterial	1480	18
College St. SE	Montclair Dr. SE	28th Ave. SE	77	80	82	80	84	Arterial	1150	20
College St. SE	28th Ave. SE	25th Ave. SE	78	81	83	81	80	Arterial	1320	21
College St. SE	25th Ave. SE	22nd Ave. SE	78	79	79	77	79	Arterial	830	21
College St. SE	22nd Ave. SE	18th Ave. SE	78	80	81	81	84	Arterial	1110	21
College St. SE	18th Ave. SE	14th Ave. SE	77	78	79	79	78	Arterial	1210	20
College St. SE	14th Ave. SE	Lacey Blvd. SE	83	78	80	79	81	Arterial	760	25
College St. SE	Lacey Blvd. SE	Pacific Ave. SE	81	81	76	75	75	Arterial	560	23
College St. SE	Pacific Ave. SE	Woodland Square Lp. SE	82	82	84	83	86	Arterial	1020	24
College St. SE	Woodland Square Lp. SE	6th Ave. SE	82	82	84	83	86	Arterial	1110	24

Street Name	Begin Location	End Location	2018	2017	2016	2015	2014	Func. Class	Length (ft)	RSL
College St. SE	6th Ave. SE	I-5 Corridor	80	80	82	81	85	Arterial	1170	23
College St. SE	I-5 Corridor	Martin Way E	80	82	84	83	86	Arterial	520	23
Colorado Ave. SE	Virginia St. SE	Pennsylvania St. SE	88	89	89	88	88	Residential	555	31
Columbia Way NE	Vashon Dr. NE	Mercer Ct. NE	88	88	89	87	87	Residential	550	31
Columbia Way NE	Marvin Rd. NE	Edgewater Blvd. NE	93	93	95	95	96	Collector	920	22
Columbia Way NE	Edgewater Blvd. NE	Cashmere Dr. NE	93	93	95	95	96	Collector	790	22
Columbia Way NE	Cashmere Dr. NE	Vashon Dr. NE	93	93	95	96	96	Collector	900	22
Columbine Ct. SE	57th Ave. SE	End of Road	85	87	87	84	83	Residential	430	29
Commerce Place Dr. NE	Williamette Dr. NE	South End of Road	77	79	81	82	80	Residential	850	24
Commerce Place Dr. NE	Williamette Dr. NE	North End of Road	81	82	84	83	85	Residential	1680	27
Compass St. SE	71st Ave. SE	Balustrade Blvd. SE	85	86	88	87	87	Residential	1160	36
Compass St. SE	Balustrade Blvd. SE	66th Ave. SE	89	89	89	88	87	Residential	680	31
Compton Blvd. SE	Yelm Hwy. SE	Stockton St. SE	79	79	81	81	83	Residential	840	25
Compton Blvd. SE	Stockton St. SE	60th Ave. SE	74	76	78	78	80	Residential	1210	22
Compton Blvd. SE	60th Ave. SE	Compton Lp. SE	77	77	79	80	84	Residential	720	24
Compton Lp. SE	Compton Blvd. SE	Compton Blvd. SE	84	84	84	84	81	Residential	980	28
Cook Ct. NE	Stevens Dr. NE	End of Road	90	91	92	92	92	Residential	370	32
Cora St. SE	Mary Lou St. SE	12th Ave. SE	80	83	85	85	86	Residential	610	27
Corona Ct. NE	Aurora St. NE	End of Road	95	97	98	98	100	Residential	175	34
Corona St. NE	Aurora St. NE	Nova St. NE	95	96	98	100	100	Residential	430	34
Corporate Center Ct. SE	Corporate Center Dr. SE	End of Road	80	81	84	84	83	Collector	450	16
Corporate Center Dr. SE	Yelm Hwy. SE	Intelco Lp. SE	96	98	100	100	66	Collector	470	30
Corporate Center Dr. SE	Intelco Lp. SE	Intelco Lp. SE	96	98	100	100	65	Collector	1100	30
Corporate Center Dr. SE	Intelco Lp. SE	College St. SE	96	98	100	100	65	Collector	910	30
Corporate Center Lp. SE	Corporate Center Dr. SE	End of public street	74	75	75	75	73	Collector	325	13
Corvette Ct. NE	Mercedes Dr. NE	End of Road	80	82	83	84	83	Residential	230	26
Cory Ct. SE	61st Ave. SE	End of Road	84	86	87	85	85	Residential	190	28
Craney Ct. SE	Sidney St. SE	West End of Road	86	84	85	85	86	Residential	240	30
Craney Ct. SE	Sidney St. SE	East End of Road	86	86	87	87	86	Residential	410	30
Crestone St. NE	End of Road (alley)	End of Road (alley)	88	88	89	89	87	Residential	256	31
Crimson Ct. SE	Yelm Hwy. SE	End of Road	84	87	87	84	86	Residential	830	28
Crosswaters St. SE	Mullen Rd. SE	48th Ave. SE	84	84	85	87	86	Residential	140	29
Crowe St. SE	Lacey Blvd. SE	End of Road	81	82	85	84	85	Residential	660	35
Crystal Ct. SE	58th Ave. SE	End of Road	82	83	84	82	84	Residential	310	27
Curtis Ct. SE	19th Ave. SE	End of Road	91	92	93	90	89	Residential	300	36
Cypress Dr. NE	Pavilion Way NE	Cypress Lp. NE	87	88	89	88	87	Residential	790	39
Cypress Lp. NE	Cypress Dr. NE	Vashon Dr. NE	89	89	89	89	87	Residential	1230	32
Danials Lp. SE	Compton Blvd. SE	Compton Blvd. SE	84	85	85	85	85	Residential	1120	28

Street Name	Begin Location	End Location	2018	2017	2016	2015	2014	Func. Class	Length (ft)	RSL
Davis Ct. NE	Jeri Dr. NE	End of Road	90	91	92	92	92	Residential	380	32
Delaware Ave. SE	Virginia St. SE	Balustrade Blvd. SE	86	87	88	88	89	Residential	1115	37
Denali Ave. NE	Fairweather St. NE	Edgewater Blvd. NE	88	88	89	89	87	Residential	443	31
Deni Dr. NE	Classic Dr. NE	31st Ave. NE	90	91	92	90	92	Residential	900	32
Deni Dr. NE	Nova St. NE	Classic Dr. NE	90	91	92	91	92	Residential	800	32
Deni Dr. NE	Willamette Dr. NE	Nova St. NE	95	96	97	97	100	Residential	800	34
Desmond Dr. SE	Martin Way E	End of Road	79	79	80	80	81	Collector	650	15
Detlefsen Pl. SE	24th Ave. SE	End of Road	99	100	100	75	81	Residential	240	34
Deuce Ct. NE	Campus Dr. NE	End of Road	95	96	98	100	100	Residential	200	34
Diamond Ct. SE	Diamond Lp. SE	End of Road	81	82	81	80	83	Residential	320	27
Diamond Lp. SE	22nd Ave. SE	Diamond Rd. SE	80	81	79	81	85	Residential	1250	26
Diamond Lp. SE	Diamond Rd. SE	Diamond Rd. SE	81	81	83	83	83	Residential	1310	27
Diamond Rd. SE	Diamond Lp. SE	Diamond Lp. SE	80	81	79	81	84	Residential	730	26
Diamond Rd. SE	Diamond Lp. SE	Carpenter Rd. SE	87	88	89	90	94	Residential	700	36
Dogwood St. SE	20th Ave. SE	14th Ave. SE	90	89	90	87	89	Residential	1670	32
Dogwood St. SE	14th Ave. SE	End of Road	89	91	92	91	89	Residential	400	35
Dominion Ave. NE	McKinley St. NE	Cashmere Dr. NE	87	89	90	89	86	Residential	290	30
Donegal Ct. SE	Hicks Lake Rd. SE	End of Road	87	87	87	85	86	Residential	530	30
Drake Ct. NE	Vancouver Dr. NE	End of Road	90	91	92	92	92	Residential	140	32
Dudley Ct. NE	Shepard Way NE	End of Road	95	96	98	97	100	Residential	280	34
Dudley Dr. NE	Shepard Way NE	Campus Highlands Dr. NE	95	96	98	98	100	Residential	1370	34
Durham St. SE	Helena St. SE	Natalee Dr. SE	90	90	91	91	90	Residential	990	32
Eagle Dr. NE	Bonanza Dr. NE	City Limits	81	83	83	82	85	Residential	630	27
Eagle Lp. NE	Raptor Ave. NE	Raptor Ave. NE	93	95	95	93	95	Residential	1520	33
Earhart St. NE	Campus Park Dr. NE	Amelia Ct. NE	95	95	95	95	92	Residential	460	34
East St. SE	12th Ave. SE	End of Road	87	87	89	88	89	Residential	460	38
Edgewater Blvd. NE	41st Ave. NE	Rushmore Ave. NE	83	84	87	87	86	Residential	1519	34
Edgewater Blvd. NE	Rushmore Ave. NE	Columbia Way NE	85	85	87	87	86	Residential	996	37
Edsel Ct. NE	Mercedes Dr. NE	End of Road	80	80	81	83	81	Residential	110	26
Eld Ct. NE	Vancouver Dr. NE	South End of Road	90	91	92	92	92	Residential	290	32
Eld Ct. NE	Vancouver Dr. NE	North End of Road	90	91	92	92	92	Residential	300	32
Ellsworth Ct. NE	Cameron Dr. NE	End of Road	89	89	90	88	87	Residential	280	32
Elm Ct. SE	Cedar Ct. SE	End of Road	79	81	82	82	84	Residential	210	25
Emerald St. SE	58th Ave. SE	54th Ave. SE	75	75	73	75	83	Residential	1160	23
Emerald St. SE	54th Ave. SE	Lake Hills St. SE	97	98	100	100		Residential	950	34
Enterprise Dr. NE	6th Ave. NE	Hornet Dr. NE	89	91	93	91	90	Residential	740	41
Enterprise Dr. NE	Hornet Dr. NE	15th Ave. NE	88	91	91	90	90	Residential	680	39
Essex Pl. NE	Lexington Pl. NE	End of Road	93	93	95	95	95	Residential	150	33

Street Name	Begin Location	End Location	2018	2017	2016	2015	2014	Func. Class	Length (ft)	RSL
Evie St. SE	Andrew St. SE	49th Ave. SE	100	100				Residential	400	34
Fairhill Dr. NE	31st Ave. NE	White Fir Dr. NE	88	88	89	86	87	Residential	550	31
Fairhill Dr. NE	White Fir Dr. NE	East End of Road	87	88	89	87	87	Residential	650	30
Fairweather St. NE	End of Road (alley)	End of Road (alley)	88	88	89	89	87	Residential	370	31
Fiddleback St. NE	Britton Pkwy. NE	End of Road	96	98	100	100		Residential	825	34
Fir Ct. SE	43rd Ave. SE	End of Road	78	79	79	79	80	Residential	200	25
Flute St. SE	Radius Lp. SE	Balustrade Blvd. SE	88	88	89	88	87	Residential	950	31
Flute St. SE	Balustrade Blvd. SE	66th Way SE	86	87	87	86	85	Residential	830	38
Forest Ct. SE	37th Ave. SE	End of Road	87	88	88	87	86	Residential	200	30
Forrestal Pl. NE	Enterprise Dr. NE	End of Road	93	93	95	94	92	Residential	920	33
Fortman Dr. NE	Lanyard Dr. NE	End of Road	90	91	92	88	87	Residential	1020	32
Foxglove Ct. SE	Rumac St. SE	End of Road	83	84	84	81	82	Residential	480	28
Franklin Pl. NE	Forrestal Pl. NE	End of Road	93	93	95	94	92	Residential	140	33
Franz St. SE	Lacey Blvd. SE	Pacific Ave. SE	56	58	59	57	57	Collector	670	10
Freemont St. NE	Traditions Ave. NE	Columbia Way NE	88	88	89	88	86	Residential	1336	31
Fresco Dr. SE	Balustrade Blvd. SE	Breeze St. SE	88	89	89	89	89	Residential	890	31
Galaxy Dr. NE	Martin Way E	Quinault Dr. NE	82	81	83	83	86	Collector	1830	17
Galena St. SE	Kapalea Way SE	End of Road	89	89	90	88	87	Residential	650	31
Gateway Blvd. NE	Main St. NE	Britton Pkwy. NE	87	87	88	85	86	Collector	1575	23
Gateway Blvd. NE	Britton Pkwy. NE	Birdseye Ave. NE	95	96	100	100		Collector	520	29
Gem Ct. SE	58th Ave. SE	End of Road	79	80	81	79	82	Residential	140	25
Gemini St. SE	Ruddell Rd. SE	15th Ave. SE	90	91	92	90	89	Residential	1100	36
Gemini St. SE	15th Ave. SE	Alder St. SE	86	87	89	87	88	Residential	840	42
Georgie Ct. SE	36th Ave. SE	End of Road	73	74	75	75	78	Residential	160	22
Gerald St. SE	Martin Way E	Litt Dr. SE	100	100				Collector	420	24
Gladiator St. NE	31st Ave. NE	Hanna Dr. NE	98	100	100			Residential	500	34
Glen Alda Ct. SE	5th Way SE	End of Road	74	76	77	78	83	Residential	700	22
Glen Ct. SE	5th Way SE	End of Road	75	76	77	76	78	Residential	230	23
Glen Mary Dr. SE	13th Ave. SE	Alanna Dr. SE	90	91	91	88	89	Residential	1300	32
Gold Finch Ct. SE	38th Dr. SE	End of Road	75	76	77	79	83	Residential	190	23
Gold Finch Dr. SE	38th Dr. SE	38th Dr. SE	74	74	75	73	74	Residential	1690	22
Golf Club Pl. SE	7th Ave. SE	6th Ave. SE	75	75	77	77	79	Collector	480	13
Golf Club Rd. SE	Chambers Lake Dr. SE	22nd Ave. SE	87	88	89	85	87	Residential	1140	45
Golf Club Rd. SE	22nd Ave. SE	19th Ave. SE	87	89	89	87	87	Collector	820	27
Golf Club Rd. SE	19th Ave. SE	16th Ave. SE	85	87	89	87	84	Collector	820	26
Golf Club Rd. SE	16th Ave. SE	14th Ave. SE	82	83	83	83	87	Collector	820	26
Golf Club Rd. SE	14th Ave. SE	Lacey Blvd. SE	49	51	51	51	57	Collector	1170	5
Golf Club Rd. SE	Pacific Ave. SE	7th Ave. SE	81	73	73	72	74	Collector	1140	24

Street Name	Begin Location	End Location	2018	2017	2016	2015	2014	Func. Class	Length (ft)	RSL
Golf Club Rd. SE	6th Ave. SE	3rd Ave. SE	97	98	100	100	71	Collector	770	24
Gray Ct. NE	Vancouver Dr. NE	End of Road	90	91	92	90	92	Residential	270	32
Green Ct. SE	5th Way SE	End of Road	75	77	79	78	83	Residential	140	23
Greenbriar St. SE	45th Ave. SE	End of Road	88	88	88	84	86	Residential	740	31
Greenlawn St. SE	Brentwood Dr. SE	27th Ave. SE	98	100	100	64	72	Residential	1500	34
Greenview Dr. NE	Cashmere Dr. NE	Columbia Way NE	89	89	90	88	86	Residential	481	32
Hall St. SE	14th Ave. SE	Lacey Blvd. SE	85	88	86	84	84	Residential	1400	41
Hanna Ct. NE	31st Ave. NE	End of Road	88	89	91	91	92	Residential	430	31
Hanna Dr. NE	31st Ave. NE	Gladiator St. NE	98	100	100			Residential	850	34
Hanna Dr. NE	Gladiator St. NE	Hercules Dr. NE	100	100				Residential	480	34
Hanover Dr. SE	20th Ave. SE	19th Ave. SE	64	65	65	66	63	Residential	1000	16
Hanover Dr. SE	19th Ave. SE	Clearbrook Dr. SE	56	58	61	61	63	Residential	820	12
Harrier St. NE	Eagle Lp. NE	Raptor Ave. NE	93	95	95	93	95	Residential	380	33
Harstene St. NE	Camano Lp. NE	Camano Lp. NE	92	92	93	90	87	Residential	450	33
Hawks Prairie Rd. NE	Western City Limits	Marvin Rd. NE	84	86	87	85	82	Collector	1230	18
Hawks Prairie Rd. NE	Marvin Rd. NE	Hogum Bay Rd. NE	83	85	87	85	86	Collector	3970	17
Hawks Prairie Rd. NE	Hogum Bay Rd. NE	End of Road	91	91	92	88	90	Residential	700	33
Hayworth Ave. NE	Hepburn St. NE	Bacall St. NE	91	91	92	91	90	Residential	1020	32
Helena Ave. SE	Durham St. SE	End of Road	92	93	93	93	92	Residential	900	33
Hemlock Ct. SE	22nd Ave. SE	End of Road	73	74	74	74	78	Residential	200	21
Hepburn St. NE	Hawks Prairie Rd. NE	End of Road	92	92	92	89	90	Residential	1300	33
Hera St. NE	Adonis Ave. NE	Atlas Ave. NE	96	98	100	100		Residential	360	34
Hercules Dr. NE	Campus Glen Dr. NE	Atlas Ave. NE	96	98	100	100		Collector	530	24
Hercules Dr. NE	Atlas Ave. NE	Hanna Dr. NE	98	99	100			Collector	580	24
Herron St. NE	Vashon Dr. NE	Waldron Dr. NE	96	98	100	100		Residential	975	34
Hicks Lake Rd. SE	Donegal Ct. SE	25th Ave. SE	63	63	66	64	67	Residential	1070	16
Hicks Lake Rd. SE	30th Ave. SE	Donegal Ct. SE	61	66	66	67	73	Residential	940	15
Hogum Bay Ext. Rd. NE	Hogum Bay Rd. NE	Landfill Rd. NE (gate)	87	87	87	85	87	Residential	800	30
Hogum Bay Rd. NE	Marvin Rd. NE	Williamette Dr. NE	100	100	37	36	37	Arterial	1420	25
Hogum Bay Rd. NE	Williamette Dr. NE	28th Ct. NE	100	100	29	29	33	Arterial	810	25
Hogum Bay Rd. NE	28th Ct. NE	30th Ave. NE	100	100	35	33	31	Arterial	1250	25
Hogum Bay Rd. NE	30th Ave. NE	31st Ave. NE	100	100	37	36	39	Arterial	830	25
Hogum Bay Rd. NE	31st Ave. NE	Hawks Prairie Rd. NE	86	86	52	54	55	Arterial	2170	22
Hogum Bay Rd. NE	Hawks Prairie Rd. NE	End of Road	84	84	84	84	85	Residential	1800	33
Hoh St. NE	Martin Way E	City Limits	79	80	80	81	82	Collector	950	15
Hoh St. SE	Martin Way E	Litt Dr. SE	94	94	93	89	87	Collector	1090	23
Hoh St. SE	Litt Dr. SE	End of Road	100	100				Collector	680	24
Homann Dr. SE	Lacey Elementary School	15th Ave. SE	57	57	57	58	58	Residential	1010	13

Street Name	Begin Location	End Location	2018	2017	2016	2015	2014	Func. Class	Length (ft)	RSL
Homann Dr. SE	15th Ave. SE	Pacific Ave. SE	62	62	64	64	64	Residential	1410	15
Hornet Dr. NE	Forrestal Pl. NE	Enterprise Dr. NE	92	92	95	92	92	Residential	470	33
Hornet Pl. NE	Forrestal Pl. NE	End of Road	92	92	94	92	92	Residential	260	33
Hydra St. NE	Corona St. NE	Deni Dr. NE	95	97	98	100	100	Residential	415	34
Ida Jane Way SE	35th Ave. SE	33rd Ave. SE	86	87	89	89	87	Residential	540	34
Ida Jane Way SE	36th Ave. SE	35th Ave. SE	92	93	95	94	95	Residential	380	33
Impala Dr. SE	31st Ave. SE	End of Road	82	84	84	84	87	Residential	1030	36
Impala Dr. SE	31st Ave. SE	28th Ave. SE	80	82	82	81	83	Residential	1100	33
Indiana St. SE	Colorado Ave. SE	Delaware Ave. SE	88	89	89	88	89	Residential	660	31
Ingleside Dr. SE	Kapalea Way SE	End of Road	88	88	89	89	89	Residential	1000	31
Ingleside Dr. SE	Kapalea Way SE	Zermatt St. SE	88	88	89	89	85	Residential	820	31
Ingleside Dr. SE	Zermatt St. SE	37th Ave. SE	87	90	90	89	87	Residential	950	30
Ingleside Lp. SE	Ingleside Dr. SE	Ingleside Dr. SE	88	89	91	94	95	Residential	940	31
Ingleside Way SE	Ingleside Dr. SE	Avonlea Dr. SE	88	88	89	92	92	Residential	250	31
Inlay St. SE	Radius Lp. SE	Balustrade Blvd. SE	85	86	86	85	87	Residential	1660	36
Inlay St. SE	Balustrade Blvd. SE	66th Ave. SE	89	89	89	88	87	Residential	660	31
Intelco Lp. SE	Corporate Center Dr. SE	Roxanna Dr. SE	77	79	80	80	78	Collector	1900	14
Intelco Lp. SE	Roxanna Dr. SE	Corporate Center Dr. SE	77	79	80	80	82	Collector	1300	14
Ipsut Ct. SE	Mt. Tahoma Dr. SE	End of Road	93	87	89	85	83	Residential	530	37
Jacobson Ct. SE	57th Ave. SE	End of Road	84	83	84	82	83	Residential	150	28
Jaguar Ct. NE	Alexander Dr. NE	End of Road	78	80	81	82	85	Residential	220	25
James St. SE	57th Ave. SE	Stockton St. SE	86	86	87	85	85	Residential	790	30
Jason Ct. SE	54th Ave. SE	End of Road	86	87	88	85	86	Residential	230	30
Jeffrey Ct. SE	Komachin Lp. SE	End of Road	86	87	87	87	87	Residential	380	30
Jeri Dr. NE	Deni Dr. NE	Deni Dr. NE	90	91	92	90	92	Residential	1400	32
Jessica Ct. SE	Komachin Lp. SE	End of Road	85	87	87	86	87	Residential	240	29
Jo Ann Ct. SE	36th Ave. SE	End of Road	74	75	76	75	75	Residential	160	22
Josephine Ct. SE	14th Ave. SE	End of Road	89	90	90	87	89	Residential	540	31
Jubilee Rd. NE	41st Ave. NE	Bainbridge Lp. NE	87	87	89	85	85	Residential	390	30
Judd St. SE	28th Ave. SE	26th Ave. SE	79	81	75	75	79	Residential	1060	25
Judd St. SE	26th Ave. SE	25th Ave. SE	99	100	100	73	77	Residential	500	34
Judd St. SE	24th Ave. SE	22nd Ave. SE	87	87	89	75	82	Residential	570	24
Judd St. SE	22nd Ave. SE	19th Ave. SE	77	79	81	82	81	Residential	860	24
Judd St. SE	19th Ave. SE	Ruddell Rd. SE	79	81	81	81	72	Residential	1020	25
Judd St. SE	25th Ave. SE	24th Ave. SE	98	100	100			Residential	240	34
Jude Ct. NE	Campus Park Dr. NE	End of Road	95	95	95	95	95	Residential	260	34
Juliann Ct. SE	Komachin Lp. SE	End of Road	82	83	83	83	86	Residential	340	27
Juniper Ct. SE	Arbor Dr. SE	End of Road	77	79	79	78	80	Residential	190	24

Street Name	Begin Location	End Location	2018	2017	2016	2015	2014	Func. Class	Length (ft)	RSL
Juno Ct. NE	Atlas Ave. NE	End of Road	96	98	100	100		Residential	250	34
Juno St. NE	Adonis Ave. NE	Atlas Ave. NE	96	98	100	100		Residential	360	34
Kapalea Way SE	Ingleside Dr. SE	Nelson Rd. SE	88	90	91	91	92	Residential	700	31
Kapalea Way SE	Shale St. SE	Galena St. SE	87	88	88	89	87	Residential	550	30
Kapalea Way SE	Nelson Rd. SE	Shale St. SE	88	90	90	90	89	Residential	560	31
Kathy Ct. SE	36th Ave. SE	End of Road	66	67	67	67	68	Residential	150	17
Keegan St. NE	Webster Dr. NE	Fortman Dr. NE	90	91	92	89	87	Residential	390	32
Kelly Ct. NE	Deni Dr. NE	End of Road	90	91	92	92	92	Residential	370	32
Kendra Ct. SE	James St. SE	End of Road	84	82	82	80	81	Residential	320	28
Ken-Jan Ct. SE	Greenbriar St. SE	End of Road	89	89	89	87	87	Residential	290	31
Kenrick St. SE	50th Ave. SE	49th Ave. SE	100	100				Residential	470	34
Keystone Ave. NE	McKinley St. NE	Cashmere Dr. NE	88	88	89	88	87	Residential	489	31
Koala St. SE	Stikes Woods Dr. SE	Ruddell Rd. SE	86	87	88	85	85	Residential	540	30
Koala St. SE	39th Ave. SE	Stikes Woods Dr. SE	84	85	83	80	82	Residential	1160	28
Kodiak Ave. NE	Freemont St. NE	Edgewater Blvd. NE	88	89	89	88	86	Residential	709	31
Komachin Lp. SE	54th Ave. SE	Tyler Ct. SE	83	84	85	84	86	Residential	830	28
Komachin Lp. SE	Tyler Ct. SE	Jeffery Ct. SE	85	86	87	86	87	Residential	930	29
Komachin Lp. SE	Jeffery Ct. SE	Rustin Ct. SE	85	87	87	87	87	Residential	550	29
Komachin Lp. SE	Rustin Ct. SE	Stockton St. SE	83	84	85	84	87	Residential	570	28
Kona St. NE	33rd Way NE	34th Ave. NE	92	92	92	89	89	Residential	425	33
Kona St. NE	34th Ave. NE	Hawks Prairie Rd. NE	91	91	92	87	85	Residential	585	32
Lacey Blvd. SE	Sleater Kinney Rd. SE	Golf Club Rd. SE	65	66	64	62	59	Collector	1150	9
Lacey Blvd. SE	Golf Club Rd. SE	College St. SE	80	80	83	84	82	Arterial	1365	22
Lacey Blvd. SE	College St. SE	Ruddell Rd. SE	80	80	81	80	83	Arterial	1340	22
Lacey Blvd. SE	Ruddell Rd. SE	Alder St. SE	82	80	82	82	82	Arterial	990	24
Lacey Blvd. SE	Alder St. SE	Lebanon St. SE	86	84	84	84	84	Arterial	910	26
Lacey Blvd. SE	Lebanon St. SE	Pacific Ave. SE	80	80	82	82	81	Arterial	910	22
Lacey St. SE	Pacific Ave. SE	7th Ave. SE	77	80	81	76	86	Residential	1650	24
Lackland Ct. NE	Lanyard Dr. NE	End of Road	90	91	92	89	89	Residential	200	32
Lake Hills St. SE	54th Ave. SE	Emerald St. SE	80	81	83	82	82	Residential	780	26
Lakecrest St. SE	37th Ave. SE	35th Ct. SE	73	72	74	72	76	Residential	440	24
Lakeside Dr. SE	26th Lp. SE	End of Road	98	99	100	100	90	Residential	150	38
Lakeview Ct. SE	37th Ave. SE	End of Road	79	80	81	80	81	Residential	540	25
Lakeview Dr. SE	30th Ave. SE	29th Ave. SE	81	82	82	82	75	Residential	630	26
Langley Pl. NE	Enterprise Dr. NE	End of Road	93	93	94	93	95	Residential	440	33
Lanier Ct. SE	38th Ave. SE	End of Road	91	93	93	94	91	Residential	585	32
Lanyard Dr. NE	Webster Dr. NE	End of Road	90	91	91	88	87	Residential	2090	32
Larch St. SE	25th Ave. SE	22nd Ave. SE	88	89	89	88	86	Residential	990	35

Street Name	Begin Location	End Location	2018	2017	2016	2015	2014	Func. Class	Length (ft)	RSL
Lebanon St. SE	20th Ave. SE	14th Ave. SE	84	84	85	82	81	Residential	1670	34
Lebanon St. SE	14th Ave. SE	Lacey Blvd. SE	89	89	90	88	87	Residential	720	31
Leisure Way SE	Chambers Lake Dr. SE	Gate	88	89	90	87	86	Residential	400	35
Lewis Dr. NE	Vancouver Dr. NE	Campus Park Dr. NE	90	91	92	91	92	Residential	730	32
Lewis Dr. NE	Barklay Rd. NE	Vancouver Dr. NE	90	91	92	92	92	Residential	870	32
Lexington Pl. NE	Enterprise Dr. NE	End of Road	93	93	95	93	95	Residential	520	33
Lilac St. SE	25th Ave. SE	Lacey Elementary School	99	100	100	75	76	Collector	1290	24
Litt Dr. SE	Hoh St. SE	End of Road	100	100				Collector	1300	24
Livingston Ct. NE	Livingston St. NE	End of Road	55	57	60	61	65	Residential	200	12
Livingston St. NE	8th Ave. NE	15th Ave. NE	80	81	83	83	83	Residential	960	34
Logan Dr. NE	McKinley St. NE	Keystone Ave. NE	89	89	89	88	87	Residential	893	32
London Lp. NE	Campus Glen Dr. NE	Madrid St. NE	89	90	90	87	85	Residential	400	32
Long Lake Dr. SE	32nd Ave. SE	City Limits	80	81	81	81	84	Residential	650	26
Lopez Ct. NE	Vashon Dr. NE	End of Road	88	89	89	88	87	Residential	312	31
Loren St. NE	Spencer Ave. NE	Hayworth Ave. NE	91	91	92	91	90	Residential	585	32
Lupine St. NE	Campus Glen Dr. NE	Campus Meadows Lp. NE	89	89	89	88	87	Residential	360	32
Lynn Ct. NE	Deni Dr. NE	End of Road	88	91	92	92	92	Residential	400	31
Madera Ct. SE	Sierra Dr. SE	End of Road	70	70	71	69	68	Residential	330	20
Madrid St. NE	Willamette Dr. NE	London Lp. NE	89	90	90	87	86	Residential	310	32
Madrona Ct. SE	38th Dr. SE	End of Road	83	84	84	82	80	Residential	500	28
Magnolia Ct. SE	38th Dr. SE	End of Road	82	83	83	84	81	Residential	250	27
Magnolia St. SE	16th Ave. SE	South End of Road	100	81	82	81	81	Residential	360	34
Magnolia St. SE	16th Ave. SE	North End of Road	100	79	80	80	82	Residential	380	34
Main St. NE	Gateway Blvd. NE	West End of Road	91	91	91	88	87	Collector	440	21
Main St. NE	Gateway Blvd. NE	East End of Road	91	92	93	89	90	Arterial	400	24
Main St. NE	Marvin Rd. NE	End of Road	94	95	95	92	95	Arterial	1200	25
Malibu Ct. SE	Carmel Ln. SE	Malibu Dr. SE	95	96	98	97	100	Residential	250	34
Malibu Dr. SE	Carpenter Rd. SE	Laguna Ln. SE	94	95	97	95	100	Residential	1520	34
Malibu Dr. SE	Laguna Ln. SE	Carpenter Rd. SE	95	96	98	97	100	Residential	950	34
Maple Hills Dr. SE	Sunset Dr. SE	End of Road	70	71	73	76	78	Residential	950	20
Maricite St. SE	Kapalea Way SE	End of Road	89	90	91	88	89	Residential	1040	31
Marietta Ct. NE	Vashon Dr. NE	End of Road	93	93	93	91	89	Residential	535	33
Martin Way E	College St. SE	I-5 Corridor	79	73	75	77	82	Arterial	630	19
Martin Way E	I-5 Corridor	Desmond Dr. SE	90	76	77	78	79	Arterial	1660	24
Martin Way E	Desmond Dr. SE	Carpenter Rd. SE	90	75	77	78	79	Arterial	3270	28
Martin Way E	City Limits	Marvin Rd. SE	78	78	79	75	70	Arterial	1440	21
Martin Way E	Marvin Rd. SE	Hoh St. NE	81	81	81	76	80	Arterial	2320	23
Martin Way E	Hoh St. SE	River Ridge Dr. SE	81	81	81	76	77	Arterial	1420	23

Street Name	Begin Location	End Location	2018	2017	2016	2015	2014	Func. Class	Length (ft)	RSL
Martin Way E	River Ridge Dr. SE	East End of Copper Wood Apt	81					Arterial	1600	23
Marvin Rd. NE	Martin Way E	I-5 Corridor	70	74	76	73	76	Arterial	2030	15
Marvin Rd. NE	Britton Pkwy. NE	29th Ave. NE	98	100	100	83	83	Arterial	1550	25
Marvin Rd. NE	29th Ave. NE	32nd Ave. NE	84	84	80	78	77	Arterial	2030	26
Marvin Rd. NE	32nd Ave. NE	Hawks Prairie Rd. NE	83	83	84	83	81	Arterial	2015	25
Marvin Rd. NE	Hawks Prairie Rd. NE	41st Ave. NE	69	69	70	70	72	Arterial	1880	14
Marvin Rd. NE	41st Ave. NE	44th Ave. NE	95	95	98	100	72	Arterial	2200	25
Marvin Rd. NE	44th Ave. NE	Northern City Limits	95	95	98	100	75	Arterial	990	25
Marvin Rd. NE	I-5 Corridor	Main St. NE	70	73	79	81	84	Arterial	1040	15
Marvin Rd. NE	Main St. NE	Britton Pkwy. NE	77	78	81	83	85	Arterial	740	18
Marvin Rd. SE	City Limits	Martin Way E	72	73	74	75	74	Arterial	980	17
Mary Lou St. SE	12th Ave. SE	Lisa Ln. SE	83	85	85	87	87	Residential	620	31
Mary Lou St. SE	Lisa Ln. SE	Cora St. SE	89	91	92	91	89	Residential	380	47
Maxine St. SE	25th Ave. SE	22nd Ave. SE	84	85	88	88	87	Residential	990	32
McKinley Lp. NE	McKinley St. NE	McKinley St. NE	89	90	91	90	87	Residential	710	32
McKinley St. NE	Dominion Ave. NE	Rushmore Ave. NE	87	87	89	89	86	Residential	1270	30
McKinley St. NE	Rushmore Ave. NE	Keystone Ave. NE	88	88	89	88	86	Residential	902	31
Meadow Dr. SE	Trillium St. SE	Gate	100	100				Residential	145	34
Meadow Lake St. SE	37th Ave. SE	Meade Ln. SE	93	95	95	93	95	Residential	480	33
Melody Dr. SE	Sycamore Dr. SE	22nd Ave. SE	90	91	91	87	90	Residential	510	36
Mercedes Dr. NE	Classic Dr. NE	Royce Ct. NE	78	78	79	81	84	Residential	1290	25
Mercedes Dr. NE	Royce Ct. NE	Classic Dr. NE	77	80	81	81	85	Residential	840	24
Mercer Ct. NE	Vashon Dr. NE	End of Road	89	89	89	88	87	Residential	407	32
Meridian Rd. NE	Orion Dr. NE	Helen Ave. NE	91	93	94	91	94	Collector	1000	23
Meridian Rd. NE	Helen Ave. NE	White Fir Dr. NE	95	96	97	96	100	Collector	1980	23
Meridian Rd. NE	White Fir Dr. NE	31st Ave. NE	95	96	97	96	100	Collector	1230	23
Meridian Rd. NE	31st Ave. NE	Campus Park Dr. NE	69	70	70	70	66	Collector	1330	11
Meridian Rd. NE	Campus Park Dr. NE	39th Lp. NE	69	69	69	70	70	Collector	1570	11
Meridian Rd. NE	39th Lp. NE	46th Ave. NE	49	50	51	52	52	Collector	3640	5
Meriwood Dr. NE	Williamette Dr. NE	Gate	89	89	89	87	87	Residential	1260	32
Meriwood Dr. NE	Vashon Dr. NE	Anderson Ct. NE	88	88	89	89	89	Residential	500	39
Meriwood Dr. NE	Anderson Ct. NE	Shaw Ln. NE	95	97	98	98	100	Residential	450	34
Meriwood Dr. NE	Shaw Ln. NE	End of Road	95	97	98	98	100	Residential	1575	34
Merrill Ct. NE	Cameron Dr. NE	End of Road	89	89	90	88	87	Residential	400	32
Mia St. NE	33rd Ave. NE	33rd Way NE	92	92	93	89	89	Residential	235	33
Michael Ct. NE	Campus Park Dr. NE	End of Road	95	95	97	100	100	Residential	125	34
Michelle Ct. SE	41st Ave. SE	End of Road	89	89	90	87	86	Residential	230	31
Midway Dr. NE	6th Ave. NE	Enterprise Dr. NE	92	93	95	92	92	Residential	1370	37

Street Name	Begin Location	End Location	2018	2017	2016	2015	2014	Func. Class	Length (ft)	RSL
Mills Landing Ct. SE	Carpenter Rd. SE	End of Road	89	90	91	87	87	Residential	333	31
Montclair Ct. SE	Montclair Dr. SE	South End of Road	89	92	92	88	89	Residential	180	35
Montclair Ct. SE	Montclair Dr. SE	North End of Road	87	88	91	88	89	Residential	230	30
Montclair Dr. SE	College St. SE	Montclair Ct. SE	78	78	80	80	84	Residential	460	24
Montclair Dr. SE	Montclair Ct. SE	End of Road	86	87	87	87	88	Residential	1120	30
Mossy Rock Ave. NE	Spokane St. NE	Orcas St. NE	87	88	90	89	89	Residential	570	37
Mossy Rock Ave. NE	Orcas St. NE	Orcas Lp. NE	89	90	91	90	89	Residential	580	41
Mowich Ct. SE	54th Ave. SE	End of Road	93	86	87	85	89	Residential	400	37
Mt. Adams St. SE	57th Ave. SE	56th Ave. SE	87	88	88	87	86	Residential	550	30
Mt. Baker St. SE	57th Ave. SE	56th Ave. SE	87	88	88	87	86	Residential	410	30
Mt. Olympus St. SE	Yelm Hwy. SE	56th Ave. SE	87	88	88	86	85	Residential	680	30
Mt. Rainier St. SE	57th Ave. SE	56th Ave. SE	85	86	86	85	83	Residential	540	29
Mt. Saint Helens St. SE	57th Ave. SE	56th Ave. SE	87	88	88	87	86	Residential	540	30
Mt. Tahoma Ct. SE	Mt. Tahoma Dr. SE	South End of Road	72	66	68	68	71	Residential	420	21
Mt. Tahoma Ct. SE	Mt. Tahoma Dr. SE	North End of Road	79	70	71	73	74	Residential	300	25
Mt. Tahoma Dr. SE	Mt. Tahoma Ct. SE	54th Ave. SE	77	74	75	72	64	Residential	420	24
Mt. Tahoma Dr. SE	54th Ave. SE	End of Road	66	63	65	65	68	Residential	800	17
Muir Ct. SE	54th Ave. SE	End of Road	91	86	86	83	84	Residential	380	36
Mullen Rd. SE	Ruddell Rd. SE	Funeral Home Entrance	86	87	87	87	89	Arterial	910	22
Mullen Rd. SE	Funeral Home Entrance	Timberline HS Access Rd	86	87	87	87	89	Arterial	910	22
Mullen Rd. SE	Timberline HS Access Rd	Lakes Elem. Exit	88	89	89	88	89	Arterial	690	23
Mullen Rd. SE	Lakes Elem. Exit	City Limits	82	83	83	83	86	Arterial	1040	24
Mullen Rd. SE	Rosemount Ct. SE	Crosswaters St. SE	70	70	66	67	67	Arterial	960	15
Mullen Rd. SE	Crosswaters St. SE	Afflerbaugh Dr. SE	70	70	66	67	68	Arterial	920	15
Mullen Rd. SE	College St. SE	Stikes Dr. SE	87	87	88	90	90	Arterial	1710	29
Mullen Rd. SE	Stikes Dr. SE	Park Place Dr. SE	87	89	90	90	90	Arterial	1170	29
Mullen Rd. SE	Park Place Dr. SE	Ruddell Rd. SE	87	87	90	90	90	Arterial	1320	29
Mulligan Ct. NE	Campus Dr. NE	End of Road	95	96	98	100	100	Residential	485	34
Muriel Ct. SE	27th Ct. SE	End of Road	82	83	83	84	87	Residential	620	27
Narada Ct. SE	54th Ave. SE	End of Road	72	64	66	67	74	Residential	410	21
Natalee Dr. SE	Durham St. SE	Colleen St. SE	92	93	93	93	92	Residential	940	33
Nelson Rd. SE	Kapalea Way SE	Ingleside Dr. SE	67	68	69	69	69	Residential	1030	18
Noble Firs Ct. SE	14th Ave. SE	End of Road	84	85	85	84	86	Residential	430	29
Northridge Pl. SE	39th Ave. SE	End of Road	72	74	75	75	80	Residential	400	21
Notter St. SE	15th Ave. SE	14th Ave. SE	90	91	92	89	88	Residential	340	32
Nova St. NE	Corona St. NE	Deni Dr. NE	95	97	100	100	100	Residential	415	34
Oklahoma St. SE	Colorado Ave. SE	Delaware Ave. SE	88	89	89	88	89	Residential	725	31
Opal Ct. SE	58th Ave. SE	End of Road	76	77	78	76	79	Residential	220	23

Street Name	Begin Location	End Location	2018	2017	2016	2015	2014	Func. Class	Length (ft)	RSL
Orcas Ct. NE	Orcas Lp. NE	End of Road	87	90	91	90	89	Residential	350	37
Orcas Lp. NE	Orcas St. NE	Knuckle	89	90	91	90	89	Residential	640	41
Orcas Lp. NE	Knuckle	Canton Ave. NE	87	90	91	90	89	Residential	730	37
Orcas Lp. NE	Canton Ave. NE	Orcas St. NE	89	90	91	90	89	Residential	580	41
Orcas Pl. NE	Orcas St. NE	End of Road	90	91	92	91	89	Residential	130	32
Orcas St. NE	Orcas Lp. NE	Canton Ave. NE	89	89	90	90	89	Residential	700	41
Orcas St. NE	Canton Ave. NE	Orcas Lp. NE	95	89	90	89	89	Residential	885	34
Orcas St. NE	Orcas Lp. NE	Meriwood Dr. NE	89	89	90	90	89	Residential	500	41
Orion Dr. NE	Williamette Dr. NE	Meridian Rd. NE	74	78	80	80	79	Collector	4050	14
Pacific Ave. SE	Western City Limits	Sleater Kinney Rd. SE	69	71	71	71	75	Arterial	1350	15
Pacific Ave. SE	Sleater Kinney Rd. SE	Golf Club Rd. SE	74	75	76	76	78	Arterial	1220	18
Pacific Ave. SE	Golf Club Rd. SE	College St. SE	84	87	88	86	86	Arterial	1160	24
Pacific Ave. SE	College St. SE	Ruddell Rd. SE	83	85	86	84	85	Arterial	1300	24
Pacific Ave. SE	Ruddell Rd. SE	Franz St. SE	85	85	86	86	86	Arterial	650	25
Pacific Ave. SE	Franz St. SE	Bowker St. SE	83	87	88	85	85	Arterial	1380	24
Pacific Ave. SE	Bowker St. SE	Lacey St. SE	85	87	88	85	85	Arterial	700	25
Pacific Ave. SE	Lacey St. SE	Carpenter Rd. SE	78	80	82	82	85	Arterial	1290	21
Pacific Ave. SE	Carpenter Rd. SE	Eastern City Limits	80	82	84	82	82	Arterial	620	22
Park Center Ave. NE	College St. NE	End of Road	83	84	85	84	85	Residential	600	28
Park Place Lp. SE	45th Ave. SE	44th Ct. SE	84	87	87	86	85	Residential	820	28
Park Place Lp. SE	43rd Ave. SE	45th Ave. SE	84	85	85	86	86	Residential	790	28
Park Place Lp. SE	44th Ct. SE	Mullen Rd. SE	82	83	83	83	86	Residential	530	27
Park Place Lp. SE	Mullen Rd. SE	43rd Ave. SE	80	83	85	85	86	Residential	890	26
Parkside Dr. SE	49th Ave. SE	47th Ave. SE	88	88	89	87	86	Residential	655	31
Parkside Dr. SE	47th Ave. SE	45th Ave. SE	86	88	89	86	86	Residential	900	30
Parkside Dr. SE	Yelm Hwy. SE	56th Ave. SE	87	88	88	87	89	Collector	830	22
Parkside Dr. SE	56th Ave. SE	53rd Ave. SE	90	91	91	89	89	Collector	675	20
Parkside Dr. SE	53rd Ave. SE	49th Ave. SE	100	100	100	100	100	Residential	980	34
Parquet Way SE	Ruddell Rd. SE	66th Way SE	98	100	100	100	100	Residential	970	34
Pattison Lake Dr. SE	Rumac St. SE	End of Road	71	72	73	70	69	Residential	1140	20
Pavilion Way NE	Vashon Dr. NE	Trail Crossing	89	89	89	87	87	Residential	330	32
Pennsylvania St. SE	Ruddell Rd. SE	Colorado St. SE	88	89	89	86	89	Residential	975	31
Pennsylvania St. SE	Colorado St. SE	Delaware St. SE	89	89	89	86	89	Residential	860	31
Periwinkle Lp. NE	Campus Glen Dr. NE	Campus Park Dr. NE	87	87	89	88	86	Residential	1035	39
Periwinkle Lp. NE	Periwinkle Lp. NE	Periwinkle Lp. NE	87	89	90	88	86	Residential	880	39
Pike Ave. NE	Fairweather St. NE	Edgewater Blvd. NE	88	89	89	89	87	Residential	443	31
Pilatus Ave. SE	Steinerberg St. SE	End of Road	90	91	91	88	89	Residential	1080	32
Preston St. NE	Campus Glen Dr. NE	Fortman Dr. NE	89	90	91	89	87	Residential	650	32

Street Name	Begin Location	End Location	2018	2017	2016	2015	2014	Func. Class	Length (ft)	RSL
Prism St. SE	Radius Lp. SE	Balustrade Blvd. SE	87	88	88	87	87	Residential	1660	30
Prism St. SE	Balustrade Blvd. SE	66th Ave. SE	89	89	89	88	87	Residential	660	31
Puget Meadow Lp. NE	31st Ave. NE	End of Road	96	98	100	100		Residential	710	34
Quail Dr. SE	45th Ave. SE	43rd Ave. SE	86	86	87	85	86	Residential	620	30
Quail Dr. SE	43rd Ave. SE	End of Road	84	86	87	85	86	Residential	560	28
Quinault Dr. NE	I-5 Corridor	Marvin Rd. NE	81	75	76	76	76	Collector	890	16
Quinault Dr. NE	Marvin Rd. NE	Queets Dr. NE	79	80	81	80	77	Collector	990	15
Radius Lp. SE	Balustrade Blvd. SE	71st Ave. SE	85	86	86	86	84	Residential	1180	36
Radius Lp. SE	71st Ave. SE	Bailey St. SE	85	86	85	87	87	Residential	1590	36
Radius Lp. SE	Bailey St. SE	Balustrade Blvd. SE	88	88	88	88	87	Residential	1300	31
Rainier Lp. SE	Yelm Hwy. SE	Chardonnay Dr. SE	80	79	82	83	86	Collector	520	16
Rainier Lp. SE	Chardonnay Dr. SE	Beckonridge Ln. SE	82	83	84	84	86	Collector	750	17
Rainier Lp. SE	Beckonridge Ln. SE	Rainier Rd. SE	80	81	84	84	86	Collector	620	16
Rainier Rd. SE	Southern City Limits	70th Way SE	77	79	81	82	74	Arterial	1680	18
Rainier Rd. SE	70th Way SE	Balustrade Blvd. SE	82	83	83	83	81	Arterial	760	20
Rainier Rd. SE	Balustrade Blvd. SE	66th Ave. SE	80	81	81	83	77	Arterial	600	19
Rainier Rd. SE	City Limits	Rainier Lp. SE	81	82	84	85	85	Arterial	810	22
Rainier Rd. SE	Rainier Lp. SE	Yelm Hwy. SE	80	81	83	85	81	Arterial	650	21
Raptor Ave. NE	Eagle Dr. NE	End of Road	93	95	95	92	95	Residential	980	33
Red Cedar Ct. SE	37th Ave. SE	End of Road	87	88	88	87	86	Residential	260	30
Ridgefield Ave. NE	Orcas St. NE	Orcas Lp. NE	89	90	91	91	90	Residential	590	41
Rigi St. SE	Pilatus Ave. SE	Steinerberg St. SE	91	92	93	91	90	Residential	490	32
River Ridge Dr. SE	Martin Way E.	End of Road (gate)	81	81	83	79	83	Residential	720	27
Robbins St. SE	03rd Ave. SE	End of Road	85	85	85	85	86	Residential	350	36
Rochelle St. SE	Helena Ave. SE	Natalee Dr. SE	93	95	95	94	95	Residential	1000	33
Rohr Ct. SE	Southlake Dr. SE	End of Road	93	93	95	94	92	Residential	250	33
Rosemont Ct. SE	Mullen Rd. SE	End of Road	87	86	86	86	85	Residential	300	30
Rossberg St. SE	Pilatus Ave. SE	Zermatt St. SE	89	90	90	89	89	Residential	780	31
ROUNDABOUT 01	Marvin Rd. NE	Britton Pkwy. NE	96	100	100	63	63	Arterial	440	29
ROUNDABOUT 02	Marvin Rd. NE	Main St. NE	53	55	57	57	60	Arterial	410	8
ROUNDABOUT 03	Quinault Dr. NE	Galaxy Dr. NE	80	80	81	82	84	Collector	320	16
ROUNDABOUT 04	College St. SE	45th Ave. SE	70	70	71	71	73	Arterial	370	16
ROUNDABOUT 05	Pacific Ave. SE	Golf Club Rd. SE	78	80	81	81	84	Arterial	600	22
ROUNDABOUT 06	Pacific Ave. SE	Homann Dr. SE	78	80	83	81	80	Arterial	540	22
ROUNDABOUT 07	Marvin Rd. NE	Hawks Prairie Rd. NE	58	58	59	60	60	Arterial	360	10
ROUNDABOUT 08	Meridian Rd. NE	Orion Dr. NE	56	59	61	61	65	Collector	350	7
ROUNDABOUT 09	Parkside Dr. SE	53rd Ave. SE	89	90	90	89	90	Collector	350	20
ROUNDABOUT 10	Rainier Rd. SE	Balustrade Blvd. SE	78	79	81	84	81	Arterial	410	21

Street Name	Begin Location	End Location	2018	2017	2016	2015	2014	Func. Class	Length (ft)	RSL
ROUNABOUT 11	Columbia Way NE	Vashon Dr. NE	89	90	92	92	89	Collector	270	20
ROUNABOUT 12	Britton Pkwy. NE	Gateway Blvd. NE	81	83	85	85	86	Arterial	470	23
ROUNABOUT 13	Marvin Rd. NE	41st Ave. NE	95	95	98	100		Arterial	270	25
ROUNABOUT 14	Willamette Dr. NE	31st Ave. NE	97	97	99	100		Arterial	370	25
ROUNABOUT 15	Hogum Bay Rd. NE	Willamette Dr. NE	100	100				Arterial	440	25
Roxanna Ct. SE	Roxanna Lp. SE	End of Road	89	89	89	88	89	Residential	320	31
Roxanna Dr. SE	Intelco Lp. SE	Roxanna Lp. SE	89	89	89	86	89	Residential	500	31
Roxanna Lp. SE	Roxanna Dr. SE	Roxanna Dr. SE	89	89	89	88	89	Residential	1290	31
Royal St. SE	Sleater Kinney Rd. SE	End of Road	72	74	78	78	82	Collector	180	12
Royce Ct. NE	Mercedes Dr. NE	End of Road	80	80	81	81	84	Residential	220	26
Ruddell Lp. SE	Ruddell Rd. SE	34th Ave. SE	85	89	91	93	95	Residential	810	32
Ruddell Lp. SE	34th Ave. SE	Ruddell Rd. SE	87	91	93	94	92	Residential	660	35
Ruddell Rd. SE	66th Ave. SE	Yelm Hwy. SE	75	78	78	77	81	Collector	1640	13
Ruddell Rd. SE	Yelm Hwy. SE	54th Ave. SE	87	91	93	90	88	Arterial	1310	29
Ruddell Rd. SE	54th Ave. SE	50th Ave. SE	92	93	95	92	95	Arterial	990	28
Ruddell Rd. SE	50th Ave. SE	Rainier Vista Park	92	93	95	92	95	Arterial	790	28
Ruddell Rd. SE	Rainier Vista Park	45th Ave. SE	92	93	95	92	95	Arterial	900	28
Ruddell Rd. SE	45th Ave. SE	Mullen Rd. SE	89	91	95	92	95	Arterial	720	31
Ruddell Rd. SE	Mullen Rd. SE	39th Ave. SE	91	93	95	92	95	Arterial	1110	28
Ruddell Rd. SE	39th Ave. SE	Ruddell Lp. SE	91	93	95	92	95	Arterial	950	28
Ruddell Rd. SE	Ruddell Lp. SE	Ruddell Lp. SE	92	93	95	92	95	Arterial	1270	28
Ruddell Rd. SE	Ruddell Lp. SE	30th Ave. SE	92	93	95	92	95	Arterial	810	29
Ruddell Rd. SE	30th Ave. SE	27th Ave. SE	91	93	95	92	95	Arterial	1200	28
Ruddell Rd. SE	27th Ave. SE	25th Ave. SE	92	93	95	92	95	Arterial	590	29
Ruddell Rd. SE	25th Ave. SE	22nd Ave. SE	91	91	95	92	95	Arterial	980	28
Ruddell Rd. SE	22nd Ave. SE	Gemini St. SE	92	93	95	92	95	Arterial	1080	28
Ruddell Rd. SE	Gemini St. SE	15th Ave. SE	92	93	94	92	95	Arterial	1280	28
Ruddell Rd. SE	15th Ave. SE	Lacey Blvd. SE	91	92	94	92	95	Arterial	690	28
Ruddell Rd. SE	Lacey Blvd. SE	Pacific Ave. SE	92	93	95	92	95	Arterial	840	28
Ruddell Rd. SE	Yelm Hwy. SE	Yelm Hwy. SE	86	87	84	85	87	Arterial	1070	28
Ruddell Rd. SE	Balustrade Blvd. SE	66th Ave. SE	93	93	89	89	90	Residential	830	33
Rumac St. SE	Pattison Lake Dr. SE	End of Road	82	82	84	85	84	Residential	1160	27
Rushmore Ave. NE	Rushmore Way NE	Cashmere Dr. NE	87	87	88	88	86	Residential	999	30
Rushmore Ave. NE	Crestone St. NE	Rushmore Way NE	88	89	89	87	87	Residential	368	31
Rushmore Way NE	Crestone St. NE	Rushmore Ave. NE	88	88	89	89	87	Residential	368	31
Rustin Ct. SE	Komachin Lp. SE	End of Road	86	87	87	86	86	Residential	160	30
Ryan St. SE	39th Ave. SE	37th Ave. SE	85	74	77	77	82	Residential	770	29
Sadie St. NE	33rd Way NE	34th Ave. NE	92	93	93	89	89	Residential	400	33

Street Name	Begin Location	End Location	2018	2017	2016	2015	2014	Func. Class	Length (ft)	RSL
Saga St. NE	Svea Ct. NE	End of Road	96	100	100	100		Residential	110	34
San Juan St. NE	Camano Lp. NE	Camano Lp. NE	92	92	93	90	87	Residential	460	33
Sandstone Ave. SE	Maricite St. SE	Shale St. SE	90	90	91	89	87	Residential	490	32
Sandstone Ave. SE	Shale St. SE	Galena St. SE	89	90	90	88	87	Residential	480	31
Santis Lp. SE	Rossberg St. SE	Zermatt St. SE	87	88	89	88	89	Residential	910	30
Saratoga Pl. NE	Midway Dr. NE	End of Road	93	93	95	94	95	Residential	110	33
Sarazen St. SE	Balustrade Blvd. SE	66th Ave. SE	89	89	89	88	87	Residential	680	31
Sebastian Dr. NE	Hanna Ct. NE	Christa Dr. NE	88	89	91	92	92	Residential	1110	31
Selma St. SE	Pacific Ave. SE	End of Road	29	30	30	29	31	Residential	520	1
Sentinel Dr. NE	Marietta Ct. NE	Vashon Dr. NE	93	93	93	91	89	Residential	805	33
Seville Dr. SE	47th Ave. SE	45th Ave. SE	86	88	89	90	89	Residential	670	30
Seville Dr. SE	45th Ave. SE	Kapalea Way SE	88	88	89	89	90	Residential	1140	31
Shady Lane Rd. SE	Lilac St. SE	Trillium St. SE	98	100	100	87	86	Collector	330	24
Shady Lane Rd. SE	Trillium St. SE	Shadywood Ct. SE	98	100	100	87	87	Collector	1730	24
Shady Lane Rd. SE	Shadywood Ct. SE	Sierra Dr. SE	98	100	100	85	87	Collector	940	24
Shady Lane Rd. SE	Sierra Dr. SE	Carpenter Rd. SE	97	100	100	87	87	Collector	780	24
Shadywood Ct. SE	Shady Lane Rd. SE	End of Road	79	80	78	77	84	Residential	300	25
Shale St. SE	Sandstone Ave. SE	End of Road	90	91	91	88	86	Residential	640	32
Shale St. SE	Sandstone St. SE	Kapalea Way SE	89	90	91	88	87	Residential	410	31
Shangrila Pl. NE	Hornet Dr. NE	End of Road	93	93	95	95	92	Residential	170	33
Shepard Way NE	Dudley Dr. NE	Campus Highlands Dr. NE	95	96	98	98	100	Residential	840	34
Sheridan Dr. SE	21st Ave. SE	End of Road	89	90	90	89	92	Residential	810	46
Shirley Ct. SE	36th Ave. SE	End of Road	76	77	78	77	81	Residential	150	23
Shirley St. SE	25th Lp. SE	25th Ave. SE	87	87	89	86	86	Residential	460	34
Shirley St. SE	25th Ave. SE	22nd Ave. SE	87	88	89	87	87	Residential	990	34
Sidney St. SE	39th Ave. SE	End of Road	82	80	81	80	84	Residential	1280	27
Sierra Ct. SE	Sierra Dr. SE	End of Road	61	61	63	63	65	Residential	500	15
Sierra Dr. SE	Shady Lane Rd. SE	Sierra Ct. SE	65	66	69	67	68	Residential	1410	17
Sierra Dr. SE	Sierra Ct. SE	Carpenter Rd. SE	66	67	69	70	70	Residential	1230	17
Silver Maple Ct. SE	37th Ave. SE	End of Road	87	87	88	86	86	Residential	450	30
Sinclair Lp. NE	Vashon Dr. NE	Vashon Dr. NE	92	93	93	91	89	Residential	381	33
Sleater Kinney Rd. NE	Kasey Keller Dr. NE	6th Ave. NE	84	79	80	78	79	Arterial	1320	25
Sleater Kinney Rd. NE	6th Ave. NE	15th Ave. NE	82	79	80	78	80	Arterial	1320	23
Sleater Kinney Rd. SE	Leisure Way SE	21st Ave. SE	81	81	83	82	86	Residential	1290	34
Sleater Kinney Rd. SE	21st Ave. SE	16th Ave. SE	83	83	84	83	87	Collector	1310	27
Sleater Kinney Rd. SE	16th Ave. SE	14th Ave. SE	85	85	86	87	87	Collector	1030	29
Sleater Kinney Rd. SE	14th Ave. SE	12th Ave. SE	83	82	84	83	87	Collector	1320	27
Sleater Kinney Rd. SE	12th Ave. SE	Pacific Ave. SE	78	79	80	79	81	Arterial	510	21

Street Name	Begin Location	End Location	2018	2017	2016	2015	2014	Func. Class	Length (ft)	RSL
Sleater Kinney Rd. SE	Pacific Ave. SE	6th Ave. SE	80	80	82	81	84	Arterial	1460	23
Sleater Kinney Rd. SE	6th Ave. SE	I-5 Corridor	80	79	82	81	84	Arterial	380	23
Snowberry St. NE	Campus Meadows Lp. NE	Campus Meadows Lp. NE	89	90	91	89	87	Residential	300	32
Southlake Dr. SE	38th Ave. SE	City Limits	92	93	95	93	92	Residential	1275	33
Spartacus St. NE	Gladiator St. NE	Hanna Dr. NE	98	100	100			Residential	520	34
Spencer Ave. NE	Hepburn St. NE	Marvin Rd. NE	92	92	92	89	90	Residential	1440	33
Spokane Ct. NE	Spokane St. NE	End of Road	89	90	90	90	87	Residential	140	32
Spokane St. NE	Vashon Dr. NE	Spokane Ct. NE	88	88	89	88	86	Residential	735	31
Spokane St. NE	Spokane Ct. NE	Vashon Dr. NE	88	88	89	89	86	Residential	875	31
Spur Line Rd. SE	Lacey Blvd. SE	Pacific Ave. SE	78	79	79	79	82	Collector	360	15
Stanfield Rd. SE	38th Dr. SE	35th Ave. SE	92	93	95	94	95	Residential	750	33
Stanfield Rd. SE	35th Ave. SE	33rd Ave. SE	91	93	94	95	95	Residential	600	32
Stanfield Rd. SE	33rd Ave. SE	Carpenter Rd. SE	91	93	95	94	95	Residential	1030	32
Steamer Dr. SE	Compton Blvd. SE	Baldwin St. SE	87	88	89	87	87	Residential	830	30
Steamer Dr. SE	Baldwin St. SE	Compton Blvd. SE	87	88	89	88	87	Residential	920	30
Steinerberg St. SE	Pilatus Ave. SE	Ingleside Dr. SE	91	91	92	89	88	Residential	650	32
Stephan Ct. SE	5th Way SE	End of Road	74	76	78	79	86	Residential	150	22
Stevens Ct. NE	Stevens Dr. NE	End of Road	89	89	90	88	87	Residential	300	32
Stevens Dr. NE	Campus Park Dr. NE	Campus Park Dr. NE	88	90	91	91	90	Residential	1400	31
Stikes Ct. SE	Stikes Dr. SE	End of Road	70	70	72	72	80	Residential	270	22
Stikes Dr. SE	47th Ave. SE	End of Road	83	85	86	86	85	Residential	490	28
Stikes Dr. SE	47th Ave. SE	45th Ave. SE	81	83	84	84	85	Residential	740	26
Stikes Dr. SE	45th Ave. SE	41st Ave. SE	77	79	81	80	83	Residential	850	24
Stikes Dr. SE	41st Ave. SE	39th Ave. SE	83	81	81	82	83	Residential	750	28
Stikes Dr. SE	39th Ave. SE	Mullen Rd. SE	77	69	70	72	78	Residential	1030	24
Stikes Dr. SE	Mullen Rd. SE	37th Ave. SE	57	57	60	59	60	Residential	750	13
Stikes Dr. SE	37th Ave. SE	34th Ave. SE	62	62	64	64	63	Residential	750	16
Stikes Dr. SE	34th Ave. SE	32nd Ave. SE	72	72	73	73	74	Residential	710	21
Stikes Dr. SE	Stikes Dr. SE	End of Road	75	75	76	77	82	Residential	190	23
Stikes Lp. SE	Stikes Dr. SE	Stikes Dr. SE	71	71	72	73	77	Residential	810	20
Stikes Woods Dr. SE	Koala St. SE	37th Ave. SE	85	85	87	87	86	Residential	310	29
Stockton St. SE	Compton Blvd. SE	60th Ave. SE	81	83	85	85	88	Residential	790	27
Stockton St. SE	60th Ave. SE	58th Ave. SE	84	84	86	86	85	Residential	870	28
Stockton St. SE	58th Ave. SE	54th Ave. SE	81	83	83	84	81	Residential	1280	26
Stockton St. SE	54th Ave. SE	End of Road	86	87	87	84	85	Residential	300	30
Stone St. SE	Radius Lp. SE	Balustrade Blvd. SE	87	88	88	87	87	Residential	1610	30
Stone St. SE	Balustrade Blvd. SE	66th Ave. SE	89	89	89	88	87	Residential	660	31
Stonigate St. SE	45th Ave. SE	Sandstone Ave. SE	89	90	91	88	87	Residential	760	31

Street Name	Begin Location	End Location	2018	2017	2016	2015	2014	Func. Class	Length (ft)	RSL
Stonegate St. SE	Helena Ave. SE	45th Ave. SE	89	90	90	89	87	Residential	1200	31
Strawberry Ct. SE	54th Ave. SE	End of Road	84	85	86	86	86	Residential	540	28
Sulky Dr. SE	20th Ave. SE	16th Ave. SE	69	71	72	71	69	Residential	930	19
Summerwalk St. SE	56th Ave. SE	54th Ave. SE	88	87	87	88	87	Residential	415	31
Sunset Dr. SE	Maple Hills Dr. SE	26th Ave. SE	82	84	87	51	55	Residential	740	27
Sunview Ct. SE	Crimson Ct. SE	End of Road	84	85	87	85	84	Residential	190	28
Svea Ct. NE	Burlwood St. NE	End of Road	96	99	100	100		Residential	500	34
Switchback Lp. SE	Compass St. SE	Compass St. SE	87	87	87	87	87	Residential	1070	30
Sycamore St. SE	25th Ave. SE	22nd Ave. SE	87	88	88	88	89	Residential	1090	30
Sycamore St. SE	22nd Ave. SE	Gemini St. SE	87	88	87	88	86	Residential	1100	30
Tanager Ct. SE	39th Ave. SE	End of Road	81	76	78	77	81	Residential	130	26
Tarawa Pl. NE	Enterprise Dr. NE	End of Road	93	93	95	95	95	Residential	390	33
Teakwood Ct. SE	41st Ave. SE	End of Road	89	90	89	89	90	Residential	460	35
Texas Ave. SE	Ruddell Rd. SE	Virginia St. SE	89	89	89	89	90	Residential	625	31
Thornbury Ct. SE	Thornbury Dr. SE	End of Road	83	84	84	84	86	Residential	520	28
Thornbury Dr. SE	Thornbury Pl. SE	57th Ave. SE	82	82	84	84	85	Residential	1450	27
Thornbury Dr. SE	57th Ave. SE	54th Ave. SE	82	83	84	84	85	Residential	750	27
Thornbury Pl. SE	61st Ave. SE	End of Road	84	84	86	84	85	Residential	440	28
Ticonderoga Pl. NE	Tarawa Pl. NE	End of Road	93	93	95	95	95	Residential	250	33
Timberline Ct. SE	Timberline Dr. SE	End of Road	85	87	87	84	88	Residential	190	42
Timberline Dr. SE	Mullen Rd. SE	Clearwater Dr. SE	87	87	88	87	90	Residential	540	34
Timberline Dr. SE	Clearwater Dr. SE	Timberline Ct. SE	83	84	85	85	88	Residential	720	38
Timberline Dr. SE	Timberline Ct. SE	41st Ave. SE	89	90	91	89	89	Residential	760	35
Timothy St. SE	Helena Ave. SE	45th Ave. SE	93	93	95	94	95	Residential	1200	33
Topaz St. SE	55th Way SE	54th Way SE	68	70	71	72	76	Residential	240	18
Traditions Ave. NE	Freemont Ave. NE	Edgewater Blvd. NE	88	88	89	87	87	Residential	575	31
Trillium St. SE	Shady Lane Rd. SE	Lacey Elementary School	99	100	100	63	65	Residential	1040	34
Twin Oaks Rd. NE	Britton Pkwy. NE	End of Road	98	99	100			Residential	730	34
Tyler Ct. SE	Komachin Lp. SE	End of Road	86	87	87	87	87	Residential	260	30
Ulery St. SE	Pacific Ave. SE	7th Ave. SE	94	96	97	97	100	Residential	1470	34
Vancouver Dr. NE	Barkley Rd. NE	Lewis Dr. NE	90	91	92	91	92	Residential	630	32
Vancouver Dr. NE	Lewis Dr. NE	Campus Park Dr. NE	90	91	92	92	92	Residential	330	32
Vancouver Dr. NE	Campus Park Dr. NE	Stevens Dr. NE	90	91	92	91	92	Residential	420	32
Vashon Ct. NE	Waldron Dr. NE	End of Road	95	99	100	100		Residential	755	34
Vashon Dr. NE	41st Ave. NE	Camano Lp. NE	81	81	83	83	80	Residential	740	31
Vashon Dr. NE	Camano Lp. NE	Sinclair Lp. NE north inters.	87	89	90	87	87	Residential	925	30
Vashon Dr. NE	Sinclair Lp. NE north inters.	Columbia Wy. NE	89	89	90	89	86	Residential	900	32
Vashon Dr. NE	Columbia Wy. NE	Lopez Ct. NE	87	87	89	87	87	Collector	505	19

Street Name	Begin Location	End Location	2018	2017	2016	2015	2014	Func. Class	Length (ft)	RSL
Vashon Dr. NE	Lopez Ct. NE	Spokane St. NE	87	87	89	86	87	Collector	560	23
Vashon Dr. NE	Spokane St. NE	Pavilion Way NE	85	85	87	85	87	Collector	770	21
Vashon Dr. NE	Pavilion Way NE	Cypress Lp. NE	88	88	87	85	87	Collector	740	20
Vashon Dr. NE	Cypress Lp. NE	Meriwood Dr. NE	88	88	89	87	87	Residential	1620	31
Vashon Dr. NE	Meriwood Dr. NE	Herron St. NE	93	94	98	100		Residential	575	44
Vashon Dr. NE	Herron St. NE	Waldron Dr. NE	96	98	100	100		Residential	1065	34
Vermont Ave. SE	Ruddell Rd. SE	Pennsylvania St. SE	88	89	89	87	88	Residential	630	40
Vincent Ct. SE	57th Ave. SE	End of Road	83	85	86	84	85	Residential	320	28
Violet St. SE	14th Ave. SE	Lacey Blvd. SE	84	84	86	86	85	Residential	580	40
Virginia St. SE	66th Ave. SE	Yelm Hwy. SE	86	87	89	87	89	Residential	1300	37
Wade Ct. SE	Komachin Lp. SE	End of Road	86	87	87	85	87	Residential	390	30
Waldron Dr. NE	Vashon Dr. NE	End of Road	96	98	100	100		Residential	1050	34
Wallaby Ct. SE	39th Ave. SE	End of Road	81	77	77	79	81	Residential	140	26
Webb St. SE	Pacific Ave. SE	End of Road	64	61	62	64	68	Residential	410	16
Webster Dr. NE	Lanyard Dr. NE	End of Road	90	91	91	88	87	Residential	1300	32
Wellington Lp. SE	Stikes Dr. SE	Stikes Dr. SE	76	77	77	74	77	Residential	620	23
Western Pkwy. NE	Britton Pkwy. NE	End of Road	96	99	100			Residential	420	34
Westlake Dr. SE	21st Ave. SE	End of Road	100	91	92	89	90	Residential	1820	34
Westminster Ct. NE	Westminster Dr. NE	End of Road	61	64	66	67	71	Residential	260	15
Westminster Dr. NE	7th Ave. NE	End of Road	51	53	55	57	59	Residential	1020	10
Whidbey Rd. NE	41st Ave. NE	Bainbridge Lp. NE	88	88	89	87	86	Residential	390	31
White Fir Dr. NE	Fairhill Dr. NE	Meridian Rd. NE	50	52	55	52	53	Residential	1580	9
White Top Ave. NE	White Fir Dr. NE	West End of Road	60	61	64	63	67	Residential	180	14
White Top Ave. NE	White Fir Dr. NE	East End of Road	64	65	67	67	75	Residential	180	17
Whitney Ave. NE	Edgewater Blvd. NE	Cashmere Dr. NE	89	89	90	89	86	Residential	650	32
Wildspitz St. SE	Santis Lp. SE	Zermatt St. SE	90	91	93	90	90	Residential	430	32
Willamette Dr. NE	Marvin Rd. NE	Hogum Bay Rd. NE	75	72	74	71	72	Arterial	1460	17
Willamette Dr. NE	Hogum Bay Rd. NE	Zenith Ct. NE	71	71	72	70	70	Arterial	1420	15
Willamette Dr. NE	Zenith Ct. NE	Commerce Place Dr. NE	78	80	82	82	86	Arterial	740	18
Willamette Dr. NE	Commerce Place Dr. NE	Borealis Dr. NE	75	78	81	80	84	Arterial	1330	17
Willamette Dr. NE	Borealis Dr. NE	Orion Dr. NE	77	80	83	82	85	Arterial	1220	18
Willamette Dr. NE	Orion Dr. NE	31st Ave. NE	81	83	84	84	86	Arterial	870	20
Willamette Dr. NE	31st Ave. NE	Campus Glen Dr. NE	80	82	84	82	86	Arterial	2180	19
Willamette Dr. NE	Campus Glen Dr. NE	Campus Green Dr. NE	82	84	84	84	86	Arterial	2450	20
Willamette Dr. NE	Campus Green Dr. NE	Meriwood Dr. NE	83	86	86	86		Arterial	590	21
Willow St. SE	14th Ave. SE	End of Road	91	92	92	89	90	Residential	650	36
Willow St. SE	14th Ave. SE	Lacey Blvd. SE	85	85	85	83	85	Residential	1080	41
Wilshire Ct. SE	End of Road	End of Road	72	72	74	75	78	Residential	450	21

Street Name	Begin Location	End Location	2018	2017	2016	2015	2014	Func. Class	Length (ft)	RSL
Windham Ct. NE	Cameron Dr. NE	End of Road	89	89	90	88	87	Residential	720	32
Woodland Square Lp. SE	College St. SE	7th Ave. SE	78	79	79	78	80	Residential	1820	24
Woodland Square Lp. SE	7th Ave. SE	6th Ave. SE	78	79	81	81	80	Residential	1750	24
Yelm Hwy. SE	Western City Limits	Corporate Center Dr. SE	77	77	77	78	81	Arterial	1190	18
Yelm Hwy. SE	Corporate Center Dr. SE	College St. SE	77	77	77	78	82	Arterial	1360	18
Yelm Hwy. SE	College St. SE	Sarazen St. SE	76	76	78	76	74	Arterial	940	19
Yelm Hwy. SE	Mt. Olympus St. SE	Ruddell Rd. SE	78	78	78	79	79	Arterial	960	21
Yelm Hwy. SE	Compton Blvd. SE	Southern City Limits	83	80	81	80	84	Arterial	700	21
Yelm Hwy. SE	Sarazen St. SE	Mt. Green Ln. SE	76	76	78	77	66	Arterial	1110	19
Yelm Hwy. SE	Mt. Green Ln. SE	Mt. Olympus St. SE	78	78	78	78	77	Arterial	930	21
Yelm Hwy. SE	Ruddell Rd. SE	Virginia St. SE	88	86	87	87	90	Arterial	950	23
Yelm Hwy. SE	Virginia St. SE	Compton Blvd. SE	88	86	84	83	86	Arterial	1160	23
Yonkers Dr. SE	Hanover Dr. SE	Clearbrook Dr. SE	87	89	89	86	87	Residential	930	30
Zenith Ct. NE	Williamette Dr. NE	End of Road	81	85	86	83	86	Residential	290	27
Zermatt St. SE	Ingleside Dr. SE	37th Ave. SE	83	84	86	88	89	Residential	840	33

Street Name	Begin Location	End Location	2018	2017	2016	2015	2014	Func. Class	Length (ft)	RSL
03rd Ave. SE	I-5 Corridor	College St. SE	97	97	100	100	71	Arterial	1280	29
ROUNDABOUT 01	Marvin Rd. NE	Britton Pkwy. NE	96	100	100	63	63	Arterial	440	29
Shady Lane Rd. SE	Lilac St. SE	Trillium St. SE	98	100	100	87	86	Collector	330	24
Shady Lane Rd. SE	Trillium St. SE	Shadywood Ct. SE	98	100	100	87	87	Collector	1730	24
Shady Lane Rd. SE	Shadywood Ct. SE	Sierra Dr. SE	98	100	100	85	87	Collector	940	24
Shady Lane Rd. SE	Sierra Dr. SE	Carpenter Rd. SE	97	100	100	87	87	Collector	780	24
Lilac St. SE	25th Ave. SE	Lacey Elementary School	99	100	100	75	76	Collector	1290	24
Marvin Rd. NE	Britton Pkwy. NE	29th Ave. NE	98	100	100	83	83	Arterial	1550	25
Corporate Center Dr. SE	Yelm Hwy. SE	Intelco Lp. SE	96	98	100	100	66	Collector	470	30
Corporate Center Dr. SE	Intelco Lp. SE	Intelco Lp. SE	96	98	100	100	65	Collector	1100	30
Corporate Center Dr. SE	Intelco Lp. SE	College St. SE	96	98	100	100	65	Collector	910	30
Golf Club Rd. SE	6th Ave. SE	3rd Ave. SE	97	98	100	100	71	Collector	770	24
Hercules Dr. NE	Atlas Ave. NE	Hanna Dr. NE	98	99	100			Collector	580	24
Birdseye Ave. NE	Fiddleback St. NE	End of Road	96	98	100	100		Collector	625	24
Birdseye Ave. NE	Gateway Blvd. NE	Fiddleback St. NE	94	93	100	100		Collector	1110	27
Hercules Dr. NE	Campus Glen Dr. NE	Atlas Ave. NE	96	98	100	100		Collector	530	24
Gateway Blvd. NE	Britton Pkwy. NE	Birdseye Ave. NE	95	96	100	100		Collector	520	29
ROUNDABOUT 14	Willamette Dr. NE	31st Ave. NE	97	97	99	100		Arterial	370	25
Marvin Rd. NE	44th Ave. NE	Northern City Limits	95	95	98	100	75	Arterial	990	25
Marvin Rd. NE	41st Ave. NE	44th Ave. NE	95	95	98	100	72	Arterial	2200	25
ROUNDABOUT 13	Marvin Rd. NE	41st Ave. NE	95	95	98	100		Arterial	270	25
Meridian Rd. NE	White Fir Dr. NE	31st Ave. NE	95	96	97	96	100	Collector	1230	23
Meridian Rd. NE	Helen Ave. NE	White Fir Dr. NE	95	96	97	96	100	Collector	1980	23
Carpenter Rd. SE	Woodland Trail Crossing	Pacific Ave. SE	92	93	95	92	95	Arterial	510	29
Ruddell Rd. SE	30th Ave. SE	27th Ave. SE	91	93	95	92	95	Arterial	1200	28
Ruddell Rd. SE	27th Ave. SE	25th Ave. SE	92	93	95	92	95	Arterial	590	29
Ruddell Rd. SE	25th Ave. SE	22nd Ave. SE	91	91	95	92	95	Arterial	980	28
Carpenter Rd. SE	6th Ave. SE	5th Way SE	92	93	95	92	95	Arterial	840	24
Ruddell Rd. SE	Ruddell Lp. SE	Ruddell Lp. SE	92	93	95	92	95	Arterial	1270	28
Columbia Way NE	Edgewater Bvd. NE	Cashmere Dr. NE	93	93	95	95	96	Collector	790	22
Carpenter Rd. SE	Pacific Ave. SE	City Limits	92	93	95	92	95	Arterial	680	24
Ruddell Rd. SE	39th Ave. SE	Ruddell Lp. SE	91	93	95	92	95	Arterial	950	28
Ruddell Rd. SE	Ruddell Lp. SE	30th Ave. SE	92	93	95	92	95	Arterial	810	29
Main St. NE	Marvin Rd. NE	End of Road	94	95	95	92	95	Arterial	1200	25
Ruddell Rd. SE	22nd Ave. SE	Gemini St. SE	92	93	95	92	95	Arterial	1080	28
Ruddell Rd. SE	Lacey Blvd. SE	Pacific Ave. SE	92	93	95	92	95	Arterial	840	28
Carpenter Rd. SE	5th Way SE	City Limits	92	93	95	92	95	Arterial	1010	24
Ruddell Rd. SE	45th Ave. SE	Mullen Rd. SE	89	91	95	92	95	Arterial	720	31

Street Name	Begin Location	End Location	2018	2017	2016	2015	2014	Func. Class	Length (ft)	RSL
Ruddell Rd. SE	Rainier Vista Park	45th Ave. SE	92	93	95	92	95	Arterial	900	28
Ruddell Rd. SE	50th Ave. SE	Rainier Vista Park	92	93	95	92	95	Arterial	790	28
Ruddell Rd. SE	54th Ave. SE	50th Ave. SE	92	93	95	92	95	Arterial	990	28
Columbia Way NE	Cashmere Dr. NE	Vashon Dr. NE	93	93	95	96	96	Collector	900	22
Columbia Way NE	Marvin Rd. NE	Edgewater Blvd. NE	93	93	95	95	96	Collector	920	22
Ruddell Rd. SE	Mullen Rd. SE	39th Ave. SE	91	93	95	92	95	Arterial	1110	28
Ruddell Rd. SE	15th Ave. SE	Lacey Blvd. SE	91	92	94	92	95	Arterial	690	28
Meridian Rd. NE	Orion Dr. NE	Helen Ave. NE	91	93	94	91	94	Collector	1000	23
31st Ave. NE	Deni Dr. NE	Meridian Rd. NE	91	93	94	95	100	Collector	1820	23
Ruddell Rd. SE	Gemini St. SE	15th Ave. SE	92	93	94	92	95	Arterial	1280	28
Main St. NE	Gateway Blvd. NE	East End of Road	91	92	93	89	90	Arterial	400	24
Ruddell Rd. SE	Yelm Hwy. SE	54th Ave. SE	87	91	93	90	88	Arterial	1310	29
Hoh St. SE	Martin Way E	Litt Dr. SE	94	94	93	89	87	Collector	1090	23
ROUNDABOUT 11	Columbia Way NE	Vashon Dr. NE	89	90	92	92	89	Collector	270	20
41st Ave. NE	Edgewater Blvd. NE	Vashon Dr. NE	88	90	91	88	87	Arterial	2170	23
Main St. NE	Gateway Blvd. NE	West End of Road	91	91	91	88	87	Collector	440	21
Parkside Dr. SE	56th Ave. SE	53rd Ave. SE	90	91	91	89	89	Collector	675	20
ROUNDABOUT 09	Parkside Dr. SE	53rd Ave. SE	89	90	90	89	90	Collector	350	20
Mullen Rd. SE	Stikes Dr. SE	Park Place Dr. SE	87	89	90	90	90	Arterial	1170	29
Mullen Rd. SE	Park Place Dr. SE	Ruddell Rd. SE	87	87	90	90	90	Arterial	1320	29
Britton Pkwy. NE	Gateway Blvd. NE	Marvin Rd. NE	87	87	90	88	89	Arterial	3600	27
41st Ave. NE	Whidbey Rd. NE	Merriwood Dr. NE	89	89	90	87	87	Arterial	1340	23
41st Ave. NE	Vashon Dr. NE	Whidbey Rd. NE	89	89	90	87	87	Arterial	1020	23
Golf Club Rd. SE	19th Ave. SE	16th Ave. SE	85	87	89	87	84	Collector	820	26
Mullen Rd. SE	Timberline HS Access Rd	Lakes Elem. Exit	88	89	89	88	89	Arterial	690	23
22nd Ave. SE	Judd St. SE	Ruddell Rd. SE	89	89	89	87	87	Collector	1260	28
Vashon Dr. NE	Columbia Wy. NE	Lopez Ct. NE	87	87	89	87	87	Collector	505	19
Vashon Dr. NE	Lopez Ct. NE	Spokane St. NE	87	87	89	86	87	Collector	560	23
41st Ave. NE	Marvin Rd. NE	Edgewater Blvd. NE	83	87	89	86	87	Arterial	770	21
53rd Ave. SE	Boardwalk St. SE	Parkside Dr. SE	89	89	89	90	89	Collector	455	20
53rd Ave. SE	College St. SE	Boardwalk St. SE	87	89	89	88	88	Collector	980	19
Golf Club Rd. SE	22nd Ave. SE	19th Ave. SE	87	89	89	87	87	Collector	820	27
Balustrade Blvd. SE	Radius Lp. SE	66th Ave. SE	85	86	88	89	92	Collector	2030	21
Parkside Dr. SE	Yelm Hwy. SE	56th Ave. SE	87	88	88	87	89	Collector	830	22
Pacific Ave. SE	Bowker St. SE	Lacey St. SE	85	87	88	85	85	Arterial	700	25
Pacific Ave. SE	Golf Club Rd. SE	College St. SE	84	87	88	86	86	Arterial	1160	24
Abbey Way SE	College St. SE	Baran Dr. SE	88	88	88	86	87	Collector	460	19
Mullen Rd. SE	College St. SE	Stikes Dr. SE	87	87	88	90	90	Arterial	1710	29

Street Name	Begin Location	End Location	2018	2017	2016	2015	2014	Func. Class	Length (ft)	RSL
Balustrade Blvd. SE	66th Ave. SE	Yelm Hwy. SE	87	88	88	88	92	Collector	1660	19
Gateway Blvd. NE	Main St. NE	Britton Pkwy. NE	87	87	88	85	86	Collector	1575	23
Pacific Ave. SE	Franz St. SE	Bowker St. SE	83	87	88	85	85	Arterial	1380	24
22nd Ave. SE	Golf Club Rd. SE	College St. SE	87	88	88	85	85	Collector	1270	27
Hawks Prairie Rd. NE	Marvin Rd. NE	Hogum Bay Rd. NE	83	85	87	85	86	Collector	3970	17
Yelm Hwy. SE	Ruddell Rd. SE	Virginia St. SE	88	86	87	87	90	Arterial	950	23
45th Ave. SE	Western City Limits	Seville Dr. SE	85	87	87	84	85	Collector	970	18
Britton Pkwy. NE	Carpenter Rd. NE	Gateway Blvd. NE	85	86	87	83	85	Arterial	4325	22
Mullen Rd. SE	Ruddell Rd. SE	Funeral Home Entrance	86	87	87	87	89	Arterial	910	22
Mullen Rd. SE	Funeral Home Entrance	Timberline HS Access Rd	86	87	87	87	89	Arterial	910	22
14th Ave. SE	Western City Limits	Sleater Kinney Rd. SE	86	87	87	85	87	Collector	1300	30
Hawks Prairie Rd. NE	Western City Limits	Marvin Rd. NE	84	86	87	85	82	Collector	1230	18
Carpenter Rd. NE	I-5 Corridor	Gravel Ln. NE	84	84	87	85	87	Arterial	1020	21
45th Ave. SE	College St. SE	Stikes Dr. SE	86	86	87	86	87	Collector	920	26
Vashon Dr. NE	Spokane St. NE	Pavilion Way NE	85	85	87	85	87	Collector	770	21
Balustrade Blvd. SE	Radius Lp. SE	Radius Lp. SE	85	87	87	86	86	Collector	2320	18
45th Ave. SE	Stikes Dr. SE	Parkside Dr. SE	84	86	87	85	87	Collector	820	25
45th Ave. SE	Parkside Dr. SE	Greenbriar St. SE	83	85	87	85	87	Collector	1010	25
Vashon Dr. NE	Pavilion Way NE	Cypress Lp. NE	88	88	87	85	87	Collector	740	20
45th Ave. SE	Greenbriar St. SE	Ruddell Rd. SE	84	86	87	85	87	Collector	860	25
31st Ave. NE	Williamette Dr. NE	Deni Dr. NE	85	85	86	84	86	Collector	1770	18
Pacific Ave. SE	College St. SE	Ruddell Rd. SE	83	85	86	84	85	Arterial	1300	24
Pacific Ave. SE	Ruddell Rd. SE	Franz St. SE	85	85	86	86	86	Arterial	650	25
37th Ave. SE	Ingleside Dr. SE	College St. SE	85	86	86	86	78	Arterial	1300	21
Sleater Kinney Rd. SE	16th Ave. SE	14th Ave. SE	85	85	86	87	87	Collector	1030	29
54th Ave. SE	Ruddell Rd. SE	Thornbury Dr. SE	86	87	86	86	87	Collector	980	21
Willamette Dr. NE	Campus Green Dr. NE	Meriwood Dr. NE	83	86	86	86	86	Arterial	590	21
Carpenter Rd. NE	City Limits	I-5 Corridor	81	83	85	85	87	Arterial	1360	24
Carpenter Rd. NE	Gravel Ln. NE	Britton Pkwy. NE	84	84	85	86	87	Arterial	1050	26
ROUNDABOUT 12	Britton Pkwy. NE	Gateway Blvd. NE	81	83	85	85	86	Arterial	470	23
22nd Ave. SE	Ruddell Rd. SE	Larch St. SE	84	85	85	77	74	Collector	1010	25
22nd Ave. SE	College St. SE	Judd St. SE	87	85	85	83	86	Collector	1280	27
06th Ave. SE	Golf Club Rd. SE	College St. SE	83	83	85	84	87	Collector	1280	27
Balustrade Blvd. SE	Rainier Rd. SE	Radius Lp. SE	83	85	85	85	87	Collector	720	19
66th Ave. SE	Sarazen St. SE	5319 66th Ave. SE	84	84	85	83	85	Collector	1840	17
04th Ave. SE	College St. SE	End of Road	83	85	85	85	86	Collector	380	17
06th Ave. SE	Sleater Kinney Rd. SE	Golf Club Rd. SE	85	85	85	83	87	Collector	1280	29
Sleater Kinney Rd. SE	21st Ave. SE	16th Ave. SE	83	83	84	83	87	Collector	1310	27

Street Name	Begin Location	End Location	2018	2017	2016	2015	2014	Func. Class	Length (ft)	RSL
College St. SE	Pacific Ave. SE	Woodland Square Lp. SE	82	82	84	83	86	Arterial	1020	24
College St. SE	Woodland Square Lp. SE	6th Ave. SE	82	82	84	83	86	Arterial	1110	24
College St. SE	I-5 Corridor	Martin Way E	80	82	84	83	86	Arterial	520	23
31st Ave. NE	Hanna Ct. NE	Williamette Dr. NE	83	83	84	82	86	Collector	1740	17
Corporate Center Ct. SE	Corporate Center Dr. SE	End of Road	80	81	84	84	83	Collector	450	16
Ruddell Rd. SE	Yelm Hwy. SE	Yelm Hwy. SE	86	87	84	85	87	Arterial	1070	28
Yelm Hwy. SE	Virginia St. SE	Compton Blvd. SE	88	86	84	83	86	Arterial	1160	23
Willamette Dr. NE	Orion Dr. NE	31st Ave. NE	81	83	84	84	86	Arterial	870	20
Willamette Dr. NE	31st Ave. NE	Campus Glen Dr. NE	80	82	84	82	86	Arterial	2180	19
Willamette Dr. NE	Campus Glen Dr. NE	Campus Green Dr. NE	82	84	84	84	86	Arterial	2450	20
25th Ave. SE	Ruddell Rd. SE	Angela St. SE	82	83	84	83	81	Collector	740	24
Rainier Lp. SE	Beckonridge Ln. SE	Rainier Rd. SE	80	81	84	84	86	Collector	620	16
Pacific Ave. SE	Carpenter Rd. SE	Eastern City Limits	80	82	84	82	82	Arterial	620	22
Lacey Blvd. SE	Alder St. SE	Lebanon St. SE	86	84	84	84	84	Arterial	910	26
Marvin Rd. NE	32nd Ave. NE	Hawks Prairie Rd. NE	83	83	84	83	81	Arterial	2015	25
Sleater Kinney Rd. SE	14th Ave. SE	12th Ave. SE	83	82	84	83	87	Collector	1320	27
Rainier Lp. SE	Chardonnay Dr. SE	Beckonridge Ln. SE	82	83	84	84	86	Collector	750	17
Rainier Rd. SE	City Limits	Rainier Lp. SE	81	82	84	85	85	Arterial	810	22
Willamette Dr. NE	Borealis Dr. NE	Orion Dr. NE	77	80	83	82	85	Arterial	1220	18
College St. SE	28th Ave. SE	25th Ave. SE	78	81	83	81	80	Arterial	1320	21
Golf Club Rd. SE	16th Ave. SE	14th Ave. SE	82	83	83	83	87	Collector	820	26
ROUNABOUT 06	Pacific Ave. SE	Homann Dr. SE	78	80	83	81	80	Arterial	540	22
Mullen Rd. SE	Lakes Elem. Exit	City Limits	82	83	83	83	86	Arterial	1040	24
45th Ave. SE	Seville Dr. SE	College St. SE	82	82	83	84	86	Collector	1360	16
Galaxy Dr. NE	Martin Way E	Quinault Dr. NE	82	81	83	83	86	Collector	1830	17
College St. SE	50th Ave. SE	45th Ave. SE	82	82	83	83	85	Arterial	1640	20
66th Ave. SE	Rainier Rd. SE	Sarazen St. SE	81	83	83	81	82	Collector	910	16
Rainier Rd. SE	Rainier Lp. SE	Yelm Hwy. SE	80	81	83	85	81	Arterial	650	21
Rainier Rd. SE	70th Way SE	Balustrade Blvd. SE	82	83	83	83	81	Arterial	760	20
Lacey Blvd. SE	Golf Club Rd. SE	College St. SE	80	80	83	84	82	Arterial	1365	22
College St. SE	Montclair Dr. SE	28th Ave. SE	77	80	82	80	84	Arterial	1150	20
22nd Ave. SE	Larch St. SE	Lilac St. SE	83	82	82	78	74	Collector	1130	25
Carpenter Rd. SE	City Limits	Diamond Rd. SE	74	79	82	83	83	Arterial	1820	18
14th Ave. SE	Golf Club Rd. SE	College St. SE	82	81	82	80	83	Collector	1300	26
14th Ave. SE	Sleater Kinney Rd. SE	Golf Club Rd. SE	83	82	82	82	83	Collector	1300	25
07th Ave. SE	Golf Club Rd. SE	College St. SE	81	82	82	82	80	Collector	1300	16
Clearbrook Dr. SE	Lacey Blvd. SE	Pacific Ave. SE	80	81	82	81	84	Collector	180	24
College St. SE	Corporate Center Dr. SE	50th Ave. SE	82	82	82	83	84	Arterial	700	20

Street Name	Begin Location	End Location	2018	2017	2016	2015	2014	Func. Class	Length (ft)	RSL
College St. SE	6th Ave. SE	I-5 Corridor	80	80	82	81	85	Arterial	1170	23
Carpenter Rd. SE	Diamond Rd. SE	Alanna Dr. SE	80	81	82	82	78	Arterial	910	23
Willamette Dr. NE	Zenith Ct. NE	Commerce Place Dr. NE	78	80	82	82	86	Arterial	740	18
Sleater Kinney Rd. SE	6th Ave. SE	I-5 Corridor	80	79	82	81	84	Arterial	380	23
Sleater Kinney Rd. SE	Pacific Ave. SE	6th Ave. SE	80	80	82	81	84	Arterial	1460	23
Lacey Blvd. SE	Ruddell Rd. SE	Alder St. SE	82	80	82	82	82	Arterial	990	24
Lacey Blvd. SE	Lebanon St. SE	Pacific Ave. SE	80	80	82	82	81	Arterial	910	22
Pacific Ave. SE	Lacey St. SE	Carpenter Rd. SE	78	80	82	82	85	Arterial	1290	21
Rainier Lp. SE	Yelm Hwy. SE	Chardonnay Dr. SE	80	79	82	83	86	Collector	520	16
Rainier Rd. SE	Balustrade Blvd. SE	66th Ave. SE	80	81	81	83	77	Arterial	600	19
ROUNDABOUT 10	Rainier Rd. SE	Balustrade Blvd. SE	78	79	81	84	81	Arterial	410	21
Martin Way E	Hoh St. SE	River Ridge Dr. SE	81	81	81	76	77	Arterial	1420	23
ROUNDABOUT 05	Pacific Ave. SE	Golf Club Rd. SE	78	80	81	81	84	Arterial	600	22
College St. SE	22nd Ave. SE	18th Ave. SE	78	80	81	81	84	Arterial	1110	21
Lacey Blvd. SE	College St. SE	Ruddell Rd. SE	80	80	81	80	83	Arterial	1340	22
ROUNDABOUT 03	Quinault Dr. NE	Galaxy Dr. NE	80	80	81	82	84	Collector	320	16
Marvin Rd. NE	Main St. NE	Britton Pkwy. NE	77	78	81	83	85	Arterial	740	18
Yelm Hwy. SE	Compton Blvd. SE	Southern City Limits	83	80	81	80	84	Arterial	700	21
Martin Way E	Marvin Rd. SE	Hoh St. NE	81	81	81	76	80	Arterial	2320	23
Quinault Dr. NE	Marvin Rd. NE	Queets Dr. NE	79	80	81	80	77	Collector	990	15
Rainier Rd. SE	Southern City Limits	70th Way SE	77	79	81	82	74	Arterial	1680	18
07th Ave. SE	Sleater Kinney Rd. SE	Golf Club Rd. SE	76	78	81	81	83	Collector	1400	20
Willamette Dr. NE	Commerce Place Dr. NE	Borealis Dr. NE	75	78	81	80	84	Arterial	1330	17
Hoh St. NE	Martin Way E	City Limits	79	80	80	81	82	Collector	950	15
Orion Dr. NE	Willamette Dr. NE	Meridian Rd. NE	74	78	80	80	79	Collector	4050	14
Desmond Dr. SE	Martin Way E	End of Road	79	79	80	80	81	Collector	650	15
Intelco Lp. SE	Corporate Center Dr. SE	Roxanna Dr. SE	77	79	80	80	78	Collector	1900	14
College St. SE	Yelm Hwy. SE	Corporate Center Dr. SE	79	79	80	80	84	Arterial	1500	19
College St. SE	14th Ave. SE	Lacey Blvd. SE	83	78	80	79	81	Arterial	760	25
Sleater Kinney Rd. NE	Kasey Keller Dr. NE	6th Ave. NE	84	79	80	78	79	Arterial	1320	25
Sleater Kinney Rd. NE	6th Ave. NE	15th Ave. NE	82	79	80	78	80	Arterial	1320	23
Marvin Rd. NE	29th Ave. NE	32nd Ave. NE	84	84	80	78	77	Arterial	2030	26
Intelco Lp. SE	Roxanna Dr. SE	Corporate Center Dr. SE	77	79	80	80	82	Collector	1300	14
Sleater Kinney Rd. SE	12th Ave. SE	Pacific Ave. SE	78	79	80	79	81	Arterial	510	21
Spur Line Rd. SE	Lacey Blvd. SE	Pacific Ave. SE	78	79	79	79	82	Collector	360	15
Marvin Rd. NE	I-5 Corridor	Main St. NE	70	73	79	81	84	Arterial	1040	15
67th Ave. SE	Western City Limits	Rainier Rd. SE	76	77	79	78	81	Collector	1210	14
College St. SE	25th Ave. SE	22nd Ave. SE	78	79	79	77	79	Arterial	830	21

Street Name	Begin Location	End Location	2018	2017	2016	2015	2014	Func. Class	Length (ft)	RSL
College St. SE	18th Ave. SE	14th Ave. SE	77	78	79	79	78	Arterial	1210	20
Martin Way E	City Limits	Marvin Rd. SE	78	78	79	75	70	Arterial	1440	21
College St. SE	39th Ave. SE	37th Ave. SE	78	78	79	79	79	Arterial	1210	18
Yelm Hwy. SE	Sarazen St. SE	Mt. Green Ln. SE	76	76	78	77	66	Arterial	1110	19
Ruddell Rd. SE	66th Ave. SE	Yelm Hwy. SE	75	78	78	77	81	Collector	1640	13
Carpenter Rd. SE	Alanna Dr. SE	Woodland Trail Crossing	75	77	78	78	74	Arterial	780	17
Yelm Hwy. SE	College St. SE	Sarazen St. SE	76	76	78	76	74	Arterial	940	19
Yelm Hwy. SE	Mt. Olympus St. SE	Ruddell Rd. SE	78	78	78	79	79	Arterial	960	21
Royal St. SE	Sleater Kinney Rd. SE	End of Road	72	74	78	78	82	Collector	180	12
College St. NE	6th Ave. NE	8th Ave. NE	75	78	78	78	80	Arterial	540	17
25th Ave. SE	Angela St. SE	Lilac St. SE	73	76	78	77	76	Collector	870	19
Carpenter Rd. SE	Long Lake Park Entrance	26th Ct. SE	77	77	78	35	21	Arterial	1090	18
Yelm Hwy. SE	Mt. Green Ln. SE	Mt. Olympus St. SE	78	78	78	78	77	Arterial	930	21
College St. SE	37th Ave. SE	Montclair Dr. SE	77	78	77	77	78	Arterial	1480	18
Yelm Hwy. SE	Western City Limits	Corporate Center Dr. SE	77	77	77	78	81	Arterial	1190	18
College St. SE	45th Ave. SE	39th Ave. SE	76	76	77	77	79	Arterial	1320	17
Golf Club Pl. SE	7th Ave. SE	6th Ave. SE	75	75	77	77	79	Collector	480	13
Martin Way E	I-5 Corridor	Desmond Dr. SE	90	76	77	78	79	Arterial	1660	24
Yelm Hwy. SE	Corporate Center Dr. SE	College St. SE	77	77	77	78	82	Arterial	1360	18
Martin Way E	Desmond Dr. SE	Carpenter Rd. SE	90	75	77	78	79	Arterial	3270	28
Pacific Ave. SE	Sleater Kinney Rd. SE	Golf Club Rd. SE	74	75	76	76	78	Arterial	1220	18
Quinault Dr. NE	I-5 Corridor	Marvin Rd. NE	81	75	76	76	76	Collector	890	16
College St. SE	Lacey Blvd. SE	Pacific Ave. SE	81	81	76	75	75	Arterial	560	23
Marvin Rd. NE	Martin Way E	I-5 Corridor	70	74	76	73	76	Arterial	2030	15
37th Ave. SE	Western City Limits	Ingleside Dr. SE	75	75	75	77	72	Arterial	1280	17
Corporate Center Lp. SE	Corporate Center Dr. SE	End of public street	74	75	75	75	73	Collector	325	13
Martin Way E	College St. SE	I-5 Corridor	79	73	75	77	82	Arterial	630	19
Willamette Dr. NE	Marvin Rd. NE	Hogum Bay Rd. NE	75	72	74	71	72	Arterial	1460	17
Marvin Rd. SE	City Limits	Martin Way E	72	73	74	75	74	Arterial	980	17
Golf Club Rd. SE	Pacific Ave. SE	7th Ave. SE	81	73	73	72	74	Collector	1140	24
College St. NE	Martin Way E	Park Center Ave. NE	68	71	73	73	77	Arterial	650	14
Willamette Dr. NE	Hogum Bay Rd. NE	Zenith Ct. NE	71	71	72	70	70	Arterial	1420	15
66th Ave. SE	5319 66th Ave. SE	Ruddell Rd. SE	76	71	72	73	69	Collector	1150	14
Pacific Ave. SE	Western City Limits	Sleater Kinney Rd. SE	69	71	71	71	75	Arterial	1350	15
ROUNDABOUT 04	College St. SE	45th Ave. SE	70	70	71	71	73	Arterial	370	16
Marvin Rd. NE	Hawks Prairie Rd. NE	41st Ave. NE	69	69	70	70	72	Arterial	1880	14
Meridian Rd. NE	31st Ave. NE	Campus Park Dr. NE	69	70	70	70	66	Collector	1330	11
Meridian Rd. NE	Campus Park Dr. NE	39th Lp. NE	69	69	69	70	70	Collector	1570	11

Street Name	Begin Location	End Location	2018	2017	2016	2015	2014	Func. Class	Length (ft)	RSL
Mullen Rd. SE	Crosswaters St. SE	Afflerbaugh Dr. SE	70	70	66	67	68	Arterial	920	15
Mullen Rd. SE	Rosemount Ct. SE	Crosswaters St. SE	70	70	66	67	67	Arterial	960	15
Lacey Blvd. SE	Sleater Kinney Rd. SE	Golf Club Rd. SE	65	66	64	62	59	Collector	1150	9
06th Ave. NE	Enterprise Dr. NE	College St. NE	60	61	63	60	59	Collector	1220	8
06th Ave. NE	Sleater Kinney Rd. NE	Enterprise Dr. NE	60	61	61	59	61	Collector	1340	8
ROUNDABOUT 08	Meridian Rd. NE	Orion Dr. NE	56	59	61	61	65	Collector	350	7
21st Ave. SE	Sleater Kinney Rd. SE	Golf Club Rd. SE	93	58	60	60	60	Collector	1280	30
College St. NE	Park Center Ave. NE	6th Ave. NE	60	57	60	59	61	Arterial	1230	11
Franz St. SE	Lacey Blvd. SE	Pacific Ave. SE	56	58	59	57	57	Collector	670	10
ROUNDABOUT 07	Marvin Rd. NE	Hawks Prairie Rd. NE	58	58	59	60	60	Arterial	360	10
ROUNDABOUT 02	Marvin Rd. NE	Main St. NE	53	55	57	57	60	Arterial	410	8
Hogum Bay Rd. NE	31st Ave. NE	Hawks Prairie Rd. NE	86	86	52	54	55	Arterial	2170	22
Golf Club Rd. SE	14th Ave. SE	Lacey Blvd. SE	49	51	51	51	57	Collector	1170	5
Meridian Rd. NE	39th Lp. NE	46th Ave. NE	49	50	51	52	52	Collector	3640	5
Carpenter Rd. SE	41st Ave. SE	38th Dr. SE	43	45	48	49	52	Arterial	930	5
Carpenter Rd. SE	45th Ave. SE	41st Ave. SE	41	44	45	47	46	Arterial	1180	4
Carpenter Rd. SE	38th Dr. SE	37th Ave. SE	41	44	45	43	50	Arterial	550	4
31st Ave. NE	Hogum Bay Rd. NE	Hanna Ct. NE	39	41	42	42	42	Collector	1320	3
Carpenter Rd. SE	37th Ave. SE	32nd Ave. SE	36	38	41	39	44	Arterial	1510	3
Carpenter Rd. SE	Mullen Rd. SE	45th Ave. SE	37	38	39	38	37	Arterial	830	3
Hogum Bay Rd. NE	Marvin Rd. NE	Williamette Dr. NE	100	100	37	36	37	Arterial	1420	25
Hogum Bay Rd. NE	30th Ave. NE	31st Ave. NE	100	100	37	36	39	Arterial	830	25
Hogum Bay Rd. NE	28th Ct. NE	30th Ave. NE	100	100	35	33	31	Arterial	1250	25
Hogum Bay Rd. NE	Williamette Dr. NE	28th Ct. NE	100	100	29	29	33	Arterial	810	25
08th Ave. SE	Sleater Kinney Rd. SE	End of Road	20	21	23	23	21	Collector	600	0
Gerald St. SE	Martin Way E	Litt Dr. SE	100	100				Collector	420	24
Hoh St. SE	Litt Dr. SE	End of Road	100	100				Collector	680	24
Martin Way E	River Ridge Dr. SE	East End of Copper Wood Apt	81					Arterial	1600	23
ROUNDABOUT 15	Hogum Bay Rd. NE	Willamette Dr. NE	100	100				Arterial	440	25
Litt Dr. SE	Hoh St. SE	End of Road	100	100				Collector	1300	24

Street Name	Begin Location	End Location	2018	2017	2016	2015	2014	Func. Class	Length (ft)	RSL	
Fiddleback St. NE	Britton Pkwy. NE	End of Road	96	98	100	100		Residential	825	34	
25th Ave. SE	College St. SE	Judd St. SE	99	100	100	77	81	Residential	1280	34	
Hanna Dr. NE	31st Ave. NE	Gladiator St. NE	98	100	100			Residential	850	34	
26th Ave. SE	College St. SE	Judd St. SE	99	100	100	72	70	Residential	1300	34	
Vashon Ct. NE	Waldron Dr. NE	End of Road	95	99	100		100	Residential	755	34	
Spartacus St. NE	Gladiator St. NE	Hanna Dr. NE	98	100	100			Residential	520	34	
Greenlawn St. SE	Brentwood Dr. SE	27th Ave. SE	98	100	100	64	72	Residential	1500	34	
26th Ave. SE	Judd St. SE	Brentwood Dr. SE	98	100	100	64	70	Residential	1270	34	
Twin Oaks Rd. NE	Britton Pkwy. NE	End of Road	98	99	100			Residential	730	34	
Trillium St. SE	Shady Lane Rd. SE	Lacey Elementary School	99	100	100	63	65	Residential	1040	34	
27th Ave. SE	Sunset Dr. SE	Brentwood Dr. SE	99	100	100	59	63	Residential	850	34	
Nova St. NE	Corona St. NE	Deni Dr. NE	95	97	100	100	100	Residential	415	34	
Gladiator St. NE	31st Ave. NE	Hanna Dr. NE	98	100	100			Residential	500	34	
Vashon Dr. NE	Herron St. NE	Waldron Dr. NE	96	98	100	100		Residential	1065	34	
Brentwood Pl. SE	Brentwood Dr. SE	23rd Ave. SE	98	100	100	58	64	Residential	790	34	
27th Ave. SE	Brentwood Dr. SE	Ruddell Rd. SE	98	100	100	66	69	Residential	550	34	
Emerald St. SE	54th Ave. SE	Lake Hills St. SE	97	98	100	100		Residential	950	34	
Burlwood St. NE	Birdseye Ave. NE	End of Road	96	98	100	100		Residential	680	34	
Detlefsen Pl. SE	24th Ave. SE	End of Road	99	100	100		75	81	Residential	240	34
Parquet Way SE	Ruddell Rd. SE	66th Way SE	98	100	100			Residential	970	34	
Svea Ct. NE	Burlwood St. NE	End of Road	96	99	100	100		Residential	500	34	
Burton Ray St. NE	15th Ave. NE	End of Road	98	100	100			Residential	570	34	
Saga St. NE	Svea Ct. NE	End of Road	96	100	100	100		Residential	110	34	
Puget Meadow Lp. NE	31st Ave. NE	End of Road	96	98	100	100		Residential	710	34	
Adonis Ave. NE	Hercules Dr. NE	Juno St. NE	96	98	100	100		Residential	440	34	
Adonis Ct. NE	Juno St. NE	End of Road	96	97	100	100		Residential	470	34	
Campus Glen Dr. NE	Preston St. NE	End of Road	98	100	100			Residential	700	34	
Atlas Ave. NE	Hercules Dr. NE	Willamette Dr. NE	96	98	100	100		Residential	690	34	
28th Ave. SE	Sunset Dr. SE	Brentwood Dr. SE	99	100	100	62	68	Residential	920	34	
Brentwood Dr. SE	28th Ave. SE	26th Ave. SE	98	100	100	55	59	Residential	610	34	
Juno Ct. NE	Atlas Ave. NE	End of Road	96	98	100	100		Residential	250	34	
Juno St. NE	Adonis Ave. NE	Atlas Ave. NE	96	98	100	100		Residential	360	34	
Bogey Dr. NE	Campus Park Dr. NE	Campus Highlands Dr. NE	98	100	100			Residential	1420	34	
Judd St. SE	26th Ave. SE	25th Ave. SE	99	100	100	73	77	Residential	500	34	
Lakeside Dr. SE	26th Lp. SE	End of Road	98	99	100	100	90	Residential	150	38	
Western Pkwy. NE	Britton Pkwy. NE	End of Road	96	99	100			Residential	420	34	
Brentwood Dr. SE	Ruddell Rd. SE	Wonderwood Park Entrance	98	100	100	58	64	Residential	750	34	
Brentwood Dr. SE	Wonderwood Park Entrance	28th Ave. SE	98	100	100	72	78	Residential	620	34	

Street Name	Begin Location	End Location	2018	2017	2016	2015	2014	Func. Class	Length (ft)	RSL
Judd St. SE	25th Ave. SE	24th Ave. SE	98	100	100			Residential	240	34
Herron St. NE	Vashon Dr. NE	Waldron Dr. NE	96	98	100	100		Residential	975	34
Hera St. NE	Adonis Ave. NE	Atlas Ave. NE	96	98	100	100		Residential	360	34
23rd Ave. SE	College St. SE	Judd St. SE	99	100	100	67	67	Residential	1280	34
Waldron Dr. NE	Vashon Dr. NE	End of Road	96	98	100	100		Residential	1050	34
23rd Ave. SE	Judd St. SE	Brentwood Pl. SE	99	100	100	67	67	Residential	460	34
Brentwood Dr. SE	26th Ave. SE	26th Ave. SE	98	100	100	70	73	Residential	1320	34
23rd Ave. SE	Brentwood Pl. SE	25th Ave. SE	99	100	100	55	57	Residential	1150	34
24th Ave. SE	College St. SE	Judd St. SE	99	100	100	66	70	Residential	1280	34
Aurora St. NE	Deni Dr. NE	End of Road	95	97	99	98	100	Residential	560	34
52nd Way SE	Boardwalk St. SE	Andrew St. SE	96	97	98	98	100	Residential	415	34
Campus Highlands Dr. NE	Shepard Way NE	Bogey Dr. NE	95	96	98	96	100	Residential	1020	34
Corona St. NE	Aurora St. NE	Nova St. NE	95	96	98	100	100	Residential	430	34
Corona Ct. NE	Aurora St. NE	End of Road	95	97	98	98	100	Residential	175	34
Campus Highlands Dr. NE	Bogey Dr. NE	46th Ave. NE	95	96	98	96	100	Residential	1220	34
Campus Dr. NE	Campus Park Dr. NE	Deuce Ct. NE	95	96	98	98	100	Residential	1410	34
Andrew St. SE	52nd Way SE	49th Ave. SE	98	99	98	100	100	Residential	720	34
51st Way SE	Boardwalk St. SE	Andrew St. SE	96	97	98	100	100	Residential	420	34
Campus Highlands Dr. NE	Campus Park Dr. NE	Shepard Way NE	95	96	98	96	100	Residential	1050	34
Anderson Ct. NE	Meriwood Dr. NE	End of Road	95	97	98	100	100	Residential	1550	34
Campus Dr. NE	Deuce Ct. NE	Campus Highlands Dr. NE	95	96	98	98	100	Residential	1200	34
Cedarbough Ct. NE	Campus Dr. NE	End of Road	95	96	98	100	100	Residential	190	34
Mulligan Ct. NE	Campus Dr. NE	End of Road	95	96	98	100	100	Residential	485	34
Balata Ct. NE	Campus Dr. NE	End of Road	95	96	98	100	100	Residential	260	34
Hydra St. NE	Corona St. NE	Deni Dr. NE	95	97	98	100	100	Residential	415	34
Shepard Way NE	Dudley Dr. NE	Campus Highlands Dr. NE	95	96	98	98	100	Residential	840	34
Malibu Dr. SE	Laguna Ln. SE	Carpenter Rd. SE	95	96	98	97	100	Residential	950	34
Bristonwood Dr. NE	Campus Highlands Dr. NE	Campus Highlands Dr. NE	95	96	98	100	100	Residential	670	34
Malibu Ct. SE	Carmel Ln. SE	Malibu Dr. SE	95	96	98	97	100	Residential	250	34
Vashon Dr. NE	Meriwood Dr. NE	Herron St. NE	93	94	98	100		Residential	575	44
Boardwalk St. SE	53rd Ave. SE	49th Ave. SE	96	98	98	100		Residential	875	34
Dudley Dr. NE	Shepard Way NE	Campus Highlands Dr. NE	95	96	98	98	100	Residential	1370	34
Dudley Ct. NE	Shepard Way NE	End of Road	95	96	98	97	100	Residential	280	34
Meriwood Dr. NE	Shaw Ln. NE	End of Road	95	97	98	98	100	Residential	1575	34
Deuce Ct. NE	Campus Dr. NE	End of Road	95	96	98	100	100	Residential	200	34
Meriwood Dr. NE	Anderson Ct. NE	Shaw Ln. NE	95	97	98	98	100	Residential	450	34
07th Ave. SE	Ulery St. SE	Carpenter Rd. SE	95	96	97	100	100	Residential	840	34
Michael Ct. NE	Campus Park Dr. NE	End of Road	95	95	97	100	100	Residential	125	34

Street Name	Begin Location	End Location	2018	2017	2016	2015	2014	Func. Class	Length (ft)	RSL
06th Ave. SE	Carpenter Rd. SE	End of Road	94	95	97	97	100	Residential	880	34
Ulery St. SE	Pacific Ave. SE	7th Ave. SE	94	96	97	97	100	Residential	1470	34
07th Ave. SE	Bowker St. SE	Lacey St. SE	95	96	97	100	100	Residential	710	34
Campus Park Dr. NE	Campus Highlands Dr. NE	Capri Ct. NE	95	95	97	96	100	Residential	1090	34
Deni Dr. NE	Willamette Dr. NE	Nova St. NE	95	96	97	97	100	Residential	800	34
07th Ave. SE	Lacey St. SE	Ulery St. SE	94	96	97	100	100	Residential	760	34
Abigail Dr. NE	Campus Park Dr. NE	Campus Highlands Dr. NE	95	96	97	98	100	Residential	1100	34
Abigail Ct. NE	Campus Park Dr. NE	End of Road	95	96	97	97	100	Residential	335	34
Malibu Dr. SE	Carpenter Rd. SE	Laguna Ln. SE	94	95	97	95	100	Residential	1520	34
Campus Willows Lp. NE	Willamette Dr. NE	Willamette Dr. NE	95	95	96	96	96	Residential	1150	34
Campus Highlands Dr. NE	Cameron Dr. NE	Campus Park Dr. NE	94	95	96	95	100	Residential	655	34
Shangrila Pl. NE	Hornet Dr. NE	End of Road	93	93	95	95	92	Residential	170	33
Campus Park Dr. NE	Capri Ct. NE	Jude Ct. NE	95	95	95	95	95	Residential	340	34
Saratoga Pl. NE	Midway Dr. NE	End of Road	93	93	95	94	95	Residential	110	33
Essex Pl. NE	Lexington Pl. NE	End of Road	93	93	95	95	95	Residential	150	33
Lexington Pl. NE	Enterprise Dr. NE	End of Road	93	93	95	93	95	Residential	520	33
Jude Ct. NE	Campus Park Dr. NE	End of Road	95	95	95	95	95	Residential	260	34
Ida Jane Way SE	36th Ave. SE	35th Ave. SE	92	93	95	94	95	Residential	380	33
Hornet Dr. NE	Forrestal Pl. NE	Enterprise Dr. NE	92	92	95	92	92	Residential	470	33
Meadow Lake St. SE	37th Ave. SE	Meade Ln. SE	93	95	95	93	95	Residential	480	33
Harrier St. NE	Eagle Lp. NE	Raptor Ave. NE	93	95	95	93	95	Residential	380	33
Midway Dr. NE	6th Ave. NE	Enterprise Dr. NE	92	93	95	92	92	Residential	1370	37
Eagle Lp. NE	Raptor Ave. NE	Raptor Ave. NE	93	95	95	93	95	Residential	1520	33
Forrestal Pl. NE	Enterprise Dr. NE	End of Road	93	93	95	94	92	Residential	920	33
Rohr Ct. SE	Southlake Dr. SE	End of Road	93	93	95	94	92	Residential	250	33
Campus Park Dr. NE	Jude Ct. NE	Cameron Dr. NE	95	95	95	95	95	Residential	1230	34
Earhart St. NE	Campus Park Dr. NE	Amelia Ct. NE	95	95	95	95	92	Residential	460	34
Colleen St. SE	47th Ave. SE	Natalee Dr. SE	93	95	95	94	95	Residential	420	33
Colleen Ct. SE	47th Ave. SE	End of Road	92	95	95	94	95	Residential	330	33
Raptor Ave. NE	Eagle Dr. NE	End of Road	93	95	95	92	95	Residential	980	33
Capri Ct. NE	Campus Park Dr. NE	End of Road	95	95	95	95	95	Residential	130	34
Rochelle St. SE	Helena Ave. SE	Natalee Dr. SE	93	95	95	94	95	Residential	1000	33
Franklin Pl. NE	Forrestal Pl. NE	End of Road	93	93	95	94	92	Residential	140	33
36th Ave. SE	Ida Jane Way SE	Stanfield Rd. SE	92	93	95	94	95	Residential	1280	37
Stanfield Rd. SE	38th Dr. SE	35th Ave. SE	92	93	95	94	95	Residential	750	33
Amelia Ct. NE	End of Road	End of Road	95	95	95	95	92	Residential	950	34
47th Ave. SE	Rochelle St. SE	Colleen Ct. SE	93	95	95	94	95	Residential	525	33
46th Ave. SE	Timothy St. SE	Colleen Ct. SE	92	94	95	94	95	Residential	300	33

Street Name	Begin Location	End Location	2018	2017	2016	2015	2014	Func. Class	Length (ft)	RSL
41st Ave. SE	Carpenter Rd. SE	Arbor Dr. SE	91	93	95	92	95	Residential	1030	32
Stanfield Rd. SE	33rd Ave. SE	Carpenter Rd. SE	91	93	95	94	95	Residential	1030	32
38th Ave. SE	Stanfield Rd. SE	End of Road	93	93	95	94	92	Residential	1570	33
35th Ave. SE	Meadow Lake St. SE	"Lakeview Estates" HOA	93	95	95	93	95	Residential	330	33
Tarawa Pl. NE	Enterprise Dr. NE	End of Road	93	93	95	95	95	Residential	390	33
Southlake Dr. SE	38th Ave. SE	City Limits	92	93	95	93	92	Residential	1275	33
36th Ave. SE	Ida Jane Way SE	End of Road	92	93	95	94	95	Residential	600	37
Ticonderoga Pl. NE	Tarawa Pl. NE	End of Road	93	93	95	95	95	Residential	250	33
Timothy St. SE	Helena Ave. SE	45th Ave. SE	93	93	95	94	95	Residential	1200	33
35th Ave. SE	Ida Jane Way SE	Stanfield Rd. SE	92	93	94	94	95	Residential	1150	33
Alanna Dr. SE	Lacey Elementary School	Carpenter Rd. SE	93	94	94	94	100	Residential	1380	37
Langley Pl. NE	Enterprise Dr. NE	End of Road	93	93	94	93	95	Residential	440	33
Hornet Pl. NE	Forrestal Pl. NE	End of Road	92	92	94	92	92	Residential	260	33
37th Ave. SE	Stanfield Rd. SE	Carpenter Rd. SE	93	93	94	93	96	Residential	1300	33
Bowker St. SE	Pacific Ave. SE	7th Ave. SE	89	91	94	97	100	Residential	1810	37
Stanfield Rd. SE	35th Ave. SE	33rd Ave. SE	91	93	94	95	95	Residential	600	32
Astaire St. NE	Spencer Ave. NE	Hayworth Ave. NE	93	93	93	91	90	Residential	470	33
Clearbrook Dr. SE	Yonkers Dr. SE	Lacey Blvd. SE	91	91	93	96	100	Residential	930	42
Wildspitz St. SE	Santis Lp. SE	Zermatt St. SE	90	91	93	90	90	Residential	430	32
Citrine Ave. SE	Maricite St. SE	Shale St. SE	91	92	93	89	87	Residential	470	32
19th Ave. SE	Judd St. SE	Ruddell Rd. SE	91	92	93	90	90	Residential	570	32
Enterprise Dr. NE	6th Ave. NE	Hornet Dr. NE	89	91	93	91	90	Residential	740	41
Rigi St. SE	Pilatus Ave. SE	Steinerberg St. SE	91	92	93	91	90	Residential	490	32
25th Ave. SE	Brentwood Pl. SE	25th Ct. SE	91	91	93	80	82	Residential	1090	36
Blakley Lp. NE	Vashon Dr. NE	Vashon Dr. NE	92	92	93	90	89	Residential	460	33
16th Way SE	Judd St. SE	Ruddell Rd. SE	91	91	93	90	90	Residential	120	36
18th Ave. SE	Judd St. SE	Ruddell Rd. SE	89	92	93	90	90	Residential	370	31
Marietta Ct. NE	Vashon Dr. NE	End of Road	93	93	93	91	89	Residential	535	33
Sentinel Dr. NE	Marietta Ct. NE	Vashon Dr. NE	93	93	93	91	89	Residential	805	33
24th Ave. SE	Brentwood Pl. SE	23rd Ave. SE	91	92	93	91	89	Residential	720	32
Sinclair Lp. NE	Vashon Dr. NE	Vashon Dr. NE	92	93	93	91	89	Residential	381	33
Helena Ave. SE	Durham St. SE	End of Road	92	93	93	93	92	Residential	900	33
Ruddell Lp. SE	34th Ave. SE	Ruddell Rd. SE	87	91	93	94	92	Residential	660	35
Bali St. NE	33rd Ave. NE	34th Ave. NE	92	93	93	89	89	Residential	575	33
Natalee Dr. SE	Durham St. SE	Colleen St. SE	92	93	93	93	92	Residential	940	33
Curtis Ct. SE	19th Ave. SE	End of Road	91	92	93	90	89	Residential	300	36
Mia St. NE	33rd Ave. NE	33rd Way NE	92	92	93	89	89	Residential	235	33
Harstene St. NE	Camano Lp. NE	Camano Lp. NE	92	92	93	90	87	Residential	450	33

Street Name	Begin Location	End Location	2018	2017	2016	2015	2014	Func. Class	Length (ft)	RSL
34th Ave. NE	Bali St. NE	Kona St. NE	92	93	93	89	89	Residential	600	33
13th Ave. SE	Clearbrook Dr. SE	Glen Mary Dr. SE	90	91	93	91	90	Residential	840	40
Sadie St. NE	33rd Way NE	34th Ave. NE	92	93	93	89	89	Residential	400	33
San Juan St. NE	Camano Lp. NE	Camano Lp. NE	92	92	93	90	87	Residential	460	33
Lanier Ct. SE	38th Ave. SE	End of Road	91	93	93	94	91	Residential	585	32
32nd Ave. SE	Impala Dr. SE	Stikes Dr. SE	91	92	93	89	92	Residential	290	50
Gemini St. SE	Ruddell Rd. SE	15th Ave. SE	90	91	92	90	89	Residential	1100	36
Vancouver Dr. NE	Campus Park Dr. NE	Stevens Dr. NE	90	91	92	91	92	Residential	420	32
Vancouver Dr. NE	Lewis Dr. NE	Campus Park Dr. NE	90	91	92	92	92	Residential	330	32
Montclair Ct. SE	Montclair Dr. SE	South End of Road	89	92	92	88	89	Residential	180	35
Gray Ct. NE	Vancouver Dr. NE	End of Road	90	91	92	90	92	Residential	270	32
Fortman Dr. NE	Lanyard Dr. NE	End of Road	90	91	92	88	87	Residential	1020	32
33rd Way NE	Bali St. NE	Marvin Rd. NE	91	92	92	88	89	Residential	1175	32
Camano Lp. NE	Camano Lp. NE	Camano Lp. NE	91	91	92	89	87	Residential	2330	33
Eld Ct. NE	Vancouver Dr. NE	North End of Road	90	91	92	92	92	Residential	300	32
Eld Ct. NE	Vancouver Dr. NE	South End of Road	90	91	92	92	92	Residential	290	32
Notter St. SE	15th Ave. SE	14th Ave. SE	90	91	92	89	88	Residential	340	32
Vancouver Dr. NE	Barklay Rd. NE	Lewis Dr. NE	90	91	92	91	92	Residential	630	32
Loren St. NE	Spencer Ave. NE	Hayworth Ave. NE	91	91	92	91	90	Residential	585	32
Lackland Ct. NE	Lanyard Dr. NE	End of Road	90	91	92	89	89	Residential	200	32
Kona St. NE	34th Ave. NE	Hawks Prairie Rd. NE	91	91	92	87	85	Residential	585	32
Kona St. NE	33rd Way NE	34th Ave. NE	92	92	92	89	89	Residential	425	33
Lewis Dr. NE	Vancouver Dr. NE	Campus Park Dr. NE	90	91	92	91	92	Residential	730	32
Lewis Dr. NE	Barklay Rd. NE	Vancouver Dr. NE	90	91	92	92	92	Residential	870	32
Kelly Ct. NE	Deni Dr. NE	End of Road	90	91	92	92	92	Residential	370	32
Keegan St. NE	Webster Dr. NE	Fortman Dr. NE	90	91	92	89	87	Residential	390	32
Mary Lou St. SE	Lisa Ln. SE	Cora St. SE	89	91	92	91	89	Residential	380	47
Willow St. SE	14th Ave. SE	End of Road	91	92	92	89	90	Residential	650	36
Hawks Prairie Rd. NE	Hogum Bay Rd. NE	End of Road	91	91	92	88	90	Residential	700	33
Lynn Ct. NE	Deni Dr. NE	End of Road	88	91	92	92	92	Residential	400	31
15th Ave. SE	Ruddell Rd. SE	End of Road	90	91	92	90	90	Residential	640	32
15th Ave. SE	Ruddell Rd. SE	Gemini St. SE	90	91	92	89	89	Residential	800	36
Jeri Dr. NE	Deni Dr. NE	Deni Dr. NE	90	91	92	90	92	Residential	1400	32
16th Ave. SE	College St. SE	Judd St. SE	89	91	92	89	90	Residential	1300	35
Westlake Dr. SE	21st Ave. SE	End of Road	100	91	92	89	90	Residential	1820	34
Hepburn St. NE	Hawks Prairie Rd. NE	End of Road	92	92	92	89	90	Residential	1300	33
Hayworth Ave. NE	Hepburn St. NE	Bacall St. NE	91	91	92	91	90	Residential	1020	32
14th Way SE	Willow St. SE	Golf Club Rd. SE	89	92	92	87	89	Residential	490	35

Street Name	Begin Location	End Location	2018	2017	2016	2015	2014	Func. Class	Length (ft)	RSL
Drake Ct. NE	Vancouver Dr. NE	End of Road	90	91	92	92	92	Residential	140	32
Deni Dr. NE	Classic Dr. NE	31st Ave. NE	90	91	92	90	92	Residential	900	32
33rd Ave. NE	Bali St. NE	Mia St. NE	91	92	92	88	89	Residential	975	32
38th Way NE	Marvin Rd. NE	End of Road	92	92	92	89	90	Residential	520	33
Davis Ct. NE	Jeri Dr. NE	End of Road	90	91	92	92	92	Residential	380	32
Christine Ct. NE	Deni Dr. NE	End of Road	88	91	92	92	92	Residential	200	31
Budd Ct. NE	Stevens Dr. NE	End of Road	90	91	92	92	92	Residential	280	32
Andress St. NE	Spencer Ave. NE	Hayworth Ave. NE	93	92	92	89	90	Residential	500	33
Deni Dr. NE	Nova St. NE	Classic Dr. NE	90	91	92	91	92	Residential	800	32
Bacall St. NE	Spencer Ave. NE	38th Way NE	93	91	92	91	90	Residential	625	33
Cook Ct. NE	Stevens Dr. NE	End of Road	90	91	92	92	92	Residential	370	32
Spencer Ave. NE	Hepburn St. NE	Marvin Rd. NE	92	92	92	89	90	Residential	1440	33
Steinerberg St. SE	Pilatus Ave. SE	Ingleside Dr. SE	91	91	92	89	88	Residential	650	32
Barklay Rd. NE	Vancouver Dr. NE	Lewis Dr. NE	90	91	92	92	92	Residential	560	32
Orcas Pl. NE	Orcas St. NE	End of Road	90	91	92	91	89	Residential	130	32
Dogwood St. SE	14th Ave. SE	End of Road	89	91	92	91	89	Residential	400	35
Camano Lp. NE	Vashon Dr. NE	Camano Lp. NE	91	91	92	90	87	Residential	940	33
19th Ave. SE	Judd St. SE	End of Road	90	91	91	88	89	Residential	630	32
Canton Ave. NE	Orcas St. NE	Orcas Lp. NE	89	90	91	91	90	Residential	540	41
47th Ave. SE	Seville Dr. SE	Stonegate St. SE	88	91	91	91	89	Residential	480	31
Christa Dr. NE	Sebastian Dr. NE	31st Ave. NE	90	91	91	94	92	Residential	1220	32
Classic Dr. NE	Deni Dr. NE	Mercedes Dr. NE	88	89	91	91	92	Residential	1020	31
Webster Dr. NE	Lanyard Dr. NE	End of Road	90	91	91	88	87	Residential	1300	32
20th Ave. SE	Judd St. SE	End of Road	90	91	91	87	86	Residential	630	36
Maricite St. SE	Kapalea Way SE	End of Road	89	90	91	88	89	Residential	1040	31
McKinley Lp. NE	McKinley St. NE	McKinley St. NE	89	90	91	90	87	Residential	710	32
Alder St. SE	Sycamore Dr. SE	14th Ave. SE	88	89	91	90	89	Residential	1610	35
Sandstone Ave. SE	Maricite St. SE	Shale St. SE	90	90	91	89	87	Residential	490	32
Lanyard Dr. NE	Webster Dr. NE	End of Road	90	91	91	88	87	Residential	2090	32
Becket St. NE	Campus Glen Dr. NE	Fortman Dr. NE	90	91	91	89	87	Residential	570	32
Ruddell Lp. SE	Ruddell Rd. SE	34th Ave. SE	85	89	91	93	95	Residential	810	32
Stevens Dr. NE	Campus Park Dr. NE	Campus Park Dr. NE	88	90	91	91	90	Residential	1400	31
Ridgefield Ave. NE	Orcas St. NE	Orcas Lp. NE	89	90	91	91	90	Residential	590	41
Sebastian Dr. NE	Hanna Ct. NE	Christa Dr. NE	88	89	91	92	92	Residential	1110	31
Capstan Dr. NE	Lanyard Dr. NE	Preston St. NE	90	91	91	89	87	Residential	360	32
Candlewood Dr. SE	Timberline Dr. SE	Clearwater Dr. SE	87	89	91	91	89	Residential	450	34
Pilatus Ave. SE	Steinerberg St. SE	End of Road	90	91	91	88	89	Residential	1080	32
Ingleside Lp. SE	Ingleside Dr. SE	Ingleside Dr. SE	88	89	91	94	95	Residential	940	31

Street Name	Begin Location	End Location	2018	2017	2016	2015	2014	Func. Class	Length (ft)	RSL
Alabaster St. SE	Sandstone St. SE	Kapalea Way SE	90	90	91	89	87	Residential	450	32
17th Ave. SE	College St. SE	West End of Road	89	91	91	86	87	Residential	590	35
Stonegate St. SE	45th Ave. SE	Sandstone Ave. SE	89	90	91	88	87	Residential	760	31
Kapalea Way SE	Ingleside Dr. SE	Nelson Rd. SE	88	90	91	91	92	Residential	700	31
Blueberry Ct. SE	47th Ave. SE	South End of Road	89	90	91	88	86	Residential	250	31
Orcas Lp. NE	Orcas St. NE	Knuckle	89	90	91	90	89	Residential	640	41
Orcas Lp. NE	Knuckle	Canton Ave. NE	87	90	91	90	89	Residential	730	37
Orcas Lp. NE	Canton Ave. NE	Orcas St. NE	89	90	91	90	89	Residential	580	41
Durham St. SE	Helena St. SE	Natalee Dr. SE	90	90	91	91	90	Residential	990	32
Snowberry St. NE	Campus Meadows Lp. NE	Campus Meadows Lp. NE	89	90	91	89	87	Residential	300	32
Orcas Ct. NE	Orcas Lp. NE	End of Road	87	90	91	90	89	Residential	350	37
Enterprise Dr. NE	Hornet Dr. NE	15th Ave. NE	88	91	91	90	90	Residential	680	39
29th Ct. SE	Ruddell Rd. SE	End of Road	87	90	91	89	86	Residential	350	30
Timberline Dr. SE	Timberline Ct. SE	41st Ave. SE	89	90	91	89	89	Residential	760	35
Melody Dr. SE	Sycamore Dr. SE	22nd Ave. SE	90	91	91	87	90	Residential	510	36
Shale St. SE	Sandstone St. SE	Kapalea Way SE	89	90	91	88	87	Residential	410	31
Preston St. NE	Campus Glen Dr. NE	Fortman Dr. NE	89	90	91	89	87	Residential	650	32
Glen Mary Dr. SE	13th Ave. SE	Alanna Dr. SE	90	91	91	88	89	Residential	1300	32
Shale St. SE	Sandstone Ave. SE	End of Road	90	91	91	88	86	Residential	640	32
25th Ave. SE	Judd St. SE	Brentwood Pl. SE	90	90	91	88	87	Residential	470	36
Mossy Rock Ave. NE	Orcas St. NE	Orcas Lp. NE	89	90	91	90	89	Residential	580	41
Blueberry Ct. SE	47th Ave. SE	North End of Road	89	90	91	87	86	Residential	330	31
Blackberry Ct. SE	47th Ave. SE	End of Road	89	89	91	87	86	Residential	460	31
Hanna Ct. NE	31st Ave. NE	End of Road	88	89	91	91	92	Residential	430	31
Montclair Ct. SE	Montclair Dr. SE	North End of Road	87	88	91	88	89	Residential	230	30
Beth Ct. NE	Deni Dr. NE	End of Road	86	89	91	91	92	Residential	420	30
Mills Landing Ct. SE	Carpenter Rd. SE	End of Road	89	90	91	87	87	Residential	333	31
41st Ave. SE	Galena St. SE	College St. SE	89	90	91	89	90	Residential	180	31
24th Ave. SE	23rd Ave. SE	Ruddell Rd. SE	89	90	91	91	89	Residential	370	31
Cameron Dr. NE	Merrill Ct. NE	Amelia Ct. NE	89	90	90	90	87	Residential	470	32
43rd Ave. SE	Quail Dr. SE	Park Place Lp. SE	89	89	90	87	87	Residential	240	31
Ellsworth Ct. NE	Cameron Dr. NE	End of Road	89	89	90	88	87	Residential	280	32
Bend Ct. NE	Spokane St. NE	End of Road	89	89	90	89	87	Residential	275	32
14th Ave. SE	Alder St. SE	Lebanon St. SE	87	87	90	88	87	Residential	700	30
Galena St. SE	Kapalea Way SE	End of Road	89	89	90	88	87	Residential	650	31
Kapalea Way SE	Nelson Rd. SE	Shale St. SE	88	90	90	90	89	Residential	560	31
Ingleside Dr. SE	Zermatt St. SE	37th Ave. SE	87	90	90	89	87	Residential	950	30
Dominion Ave. NE	McKinley St. NE	Cashmere Dr. NE	87	89	90	89	86	Residential	290	30

Street Name	Begin Location	End Location	2018	2017	2016	2015	2014	Func. Class	Length (ft)	RSL
Axis St. SE	Balustrade Blvd. SE	66th Ave. SE	87	89	90	88	87	Residential	660	30
Dogwood St. SE	20th Ave. SE	14th Ave. SE	90	89	90	87	89	Residential	1670	32
Greenview Dr. NE	Cashmere Dr. NE	Columbia Way NE	89	89	90	88	86	Residential	481	32
Josephine Ct. SE	14th Ave. SE	End of Road	89	90	90	87	89	Residential	540	31
Bretherton Ave. NE	McKinley St. NE	Cashmere Dr. NE	87	89	90	90	87	Residential	340	30
Spokane Ct. NE	Spokane St. NE	End of Road	89	90	90	90	87	Residential	140	32
Merrill Ct. NE	Cameron Dr. NE	End of Road	89	89	90	88	87	Residential	400	32
Periwinkle Lp. NE	Periwinkle Lp. NE	Periwinkle Lp. NE	87	89	90	88	86	Residential	880	39
Stonegate St. SE	Helena Ave. SE	45th Ave. SE	89	90	90	89	87	Residential	1200	31
Madrid St. NE	Willamette Dr. NE	London Lp. NE	89	90	90	87	86	Residential	310	32
Sheridan Dr. SE	21st Ave. SE	End of Road	89	90	90	89	92	Residential	810	46
Stevens Ct. NE	Stevens Dr. NE	End of Road	89	89	90	88	87	Residential	300	32
Rossberg St. SE	Pilatus Ave. SE	Zermatt St. SE	89	90	90	89	89	Residential	780	31
Vashon Dr. NE	Camano Lp. NE	Sinclair Lp. NE north inters.	87	89	90	87	87	Residential	925	30
London Lp. NE	Campus Glen Dr. NE	Madrid St. NE	89	90	90	87	85	Residential	400	32
Michelle Ct. SE	41st Ave. SE	End of Road	89	89	90	87	86	Residential	230	31
Mossy Rock Ave. NE	Spokane St. NE	Orcas St. NE	87	88	90	89	89	Residential	570	37
Orcas St. NE	Orcas Lp. NE	Meriwood Dr. NE	89	89	90	90	89	Residential	500	41
Leisure Way SE	Chambers Lake Dr. SE	Gate	88	89	90	87	86	Residential	400	35
Lebanon St. SE	14th Ave. SE	Lacey Blvd. SE	89	89	90	88	87	Residential	720	31
Orcas St. NE	Canton Ave. NE	Orcas Lp. NE	95	89	90	89	89	Residential	885	34
Whitney Ave. NE	Edgewater Blvd. NE	Cashmere Dr. NE	89	89	90	89	86	Residential	650	32
Orcas St. NE	Orcas Lp. NE	Canton Ave. NE	89	89	90	90	89	Residential	700	41
Windham Ct. NE	Cameron Dr. NE	End of Road	89	89	90	88	87	Residential	720	32
Sandstone Ave. SE	Shale St. SE	Galena St. SE	89	90	90	88	87	Residential	480	31
Vashon Dr. NE	Sinclair Lp. NE north inters.	Columbia Wy. NE	89	89	90	89	86	Residential	900	32
Campus Green Lp. NE	Campus Green Dr. NE	Campus Green Dr. NE	88	89	89	86	86	Residential	1050	31
Campus Park Dr. NE	Lewis Dr. NE	Meridian Dr. NE	87	87	89	86	86	Residential	750	30
Roxanna Ct. SE	Roxanna Lp. SE	End of Road	89	89	89	88	89	Residential	320	31
Campus Prairie Lp. NE	31st Ave. NE	31st Ave. NE	88	89	89	87	87	Residential	1346	31
Roxanna Dr. SE	Intelco Lp. SE	Roxanna Lp. SE	89	89	89	86	89	Residential	500	31
Roxanna Lp. SE	Roxanna Dr. SE	Roxanna Dr. SE	89	89	89	88	89	Residential	1290	31
Ruddell Rd. SE	Balustrade Blvd. SE	66th Ave. SE	93	93	89	89	90	Residential	830	33
Rushmore Ave. NE	Crestone St. NE	Rushmore Way NE	88	89	89	87	87	Residential	368	31
Campus Park Dr. NE	Campus Glen Dr. NE	Lewis Dr. NE	89	89	89	86	87	Residential	1500	32
Prism St. SE	Balustrade Blvd. SE	66th Ave. SE	89	89	89	88	87	Residential	660	31
Campus Green Dr. NE	Campus Green Ct. NE	Meriwood Dr. NE	88	89	89	87	86	Residential	710	31
Campus Park Dr. NE	Cameron Dr. NE	Campus Glen Dr. NE	87	87	89	87	87	Residential	975	39

Street Name	Begin Location	End Location	2018	2017	2016	2015	2014	Func. Class	Length (ft)	RSL
Campus Glen Dr. NE	Preston St. NE	Willamette Dr. NE	89	89	89	87	87	Residential	880	32
Campus Green Ct. NE	Campus Green Dr. NE	End of Road	89	88	89	88	86	Residential	190	32
Cameron Dr. NE	Windham Ct. NE	Merrill Ct. NE	87	89	89	87	87	Residential	1450	39
Cameron Dr. NE	Campus Highlands Dr. NE	Windham Ct. NE	87	89	89	88	87	Residential	840	39
Rushmore Way NE	Crestone St. NE	Rushmore Ave. NE	88	88	89	89	87	Residential	368	31
Periwinkle Lp. NE	Campus Glen Dr. NE	Campus Park Dr. NE	87	87	89	88	86	Residential	1035	39
East St. SE	12th Ave. SE	End of Road	87	87	89	88	89	Residential	460	38
Oklahoma St. SE	Colorado Ave. SE	Delaware Ave. SE	88	89	89	88	89	Residential	725	31
Parkside Dr. SE	49th Ave. SE	47th Ave. SE	88	88	89	87	86	Residential	655	31
Parkside Dr. SE	47th Ave. SE	45th Ave. SE	86	88	89	86	86	Residential	900	30
Denali Ave. NE	Fairweather St. NE	Edgewater Blvd. NE	88	88	89	89	87	Residential	443	31
Cypress Lp. NE	Cypress Dr. NE	Vashon Dr. NE	89	89	89	89	87	Residential	1230	32
Cypress Dr. NE	Pavilion Way NE	Cypress Lp. NE	87	88	89	88	87	Residential	790	39
Pavilion Way NE	Vashon Dr. NE	Trail Crossing	89	89	89	87	87	Residential	330	32
Crestone St. NE	End of Road (alley)	End of Road (alley)	88	88	89	89	87	Residential	256	31
Cashmere Dr. NE	Rushmore Ave. NE	Columbia Way NE	88	88	89	88	86	Residential	1097	31
Pennsylvania St. SE	Colorado St. SE	Delaware St. SE	89	89	89	86	89	Residential	860	31
Campus Meadows Lp. NE	Snowberry St. NE	Lupine St. NE	87	89	89	88	86	Residential	1065	39
Compass St. SE	Balustrade Blvd. SE	66th Ave. SE	89	89	89	88	87	Residential	680	31
Columbia Way NE	Vashon Dr. NE	Mercer Ct. NE	88	88	89	87	87	Residential	550	31
Colorado Ave. SE	Virginia St. SE	Pennsylvania St. SE	88	89	89	88	88	Residential	555	31
Pike Ave. NE	Fairweather St. NE	Edgewater Blvd. NE	88	89	89	89	87	Residential	443	31
Clearwater Dr. SE	Clearwater Lp. SE	41st Ave. SE	87	88	89	89	90	Residential	1020	34
Chardonnay Dr. SE	Merlot Ln. SE	Rainier Lp. SE	88	88	89	86	86	Residential	1000	31
Callison Rd. NE	Britton Pkwy. NE	End of Road	88	89	89	87	87	Residential	685	31
Cashmere Dr. NE	Dominion Ave. NE	Rushmore Ave. NE	89	89	89	89	86	Residential	1348	32
Carolina St. SE	66th Ave. SE	Texas Ave. SE	89	89	89	89	92	Residential	540	31
Candlewood Ct. SE	Candlewood Dr. SE	End of Road	87	88	89	87	88	Residential	340	34
Pennsylvania St. SE	Ruddell Rd. SE	Colorado St. SE	88	89	89	86	89	Residential	975	31
32nd Ave. SE	Carpenter Rd. SE	Long Lake Dr. SE	86	89	89	87	84	Residential	1000	30
Shirley St. SE	25th Lp. SE	25th Ave. SE	87	87	89	86	86	Residential	460	34
57th Lp. SE	57th Way SE	57th Way SE	88	89	89	89	89	Residential	545	31
55th Ave. SE	Boardwalk St. SE	Summerwalk St. SE	88	89	89	88	87	Residential	510	31
54th Ave. SE	Mt. Tahoma Dr. SE	Ruddell Rd. SE	89	87	89	87	87	Residential	1420	35
Stone St. SE	Balustrade Blvd. SE	66th Ave. SE	89	89	89	88	87	Residential	660	31
41st Ave. SE	City Limits	Carpenter Rd. SE	87	88	89	88	90	Residential	1380	34
37th Ave. SE	Apollo St. SE	End of Road	86	88	89	87	87	Residential	900	33
Teakwood Ct. SE	41st Ave. SE	End of Road	89	90	89	89	90	Residential	460	35

Street Name	Begin Location	End Location	2018	2017	2016	2015	2014	Func. Class	Length (ft)	RSL
Texas Ave. SE	Ruddell Rd. SE	Virginia St. SE	89	89	89	89	90	Residential	625	31
33rd Ct. SE	Impala Dr. SE	East End of Road	86	87	89	87	86	Residential	180	43
70th Way SE	Bailey St. SE	Radius Lp. SE	88	88	89	88	87	Residential	790	31
32nd Ave. NE	Bonanza Dr. NE	East End of Eagle Ct. Plat	87	89	89	89	92	Residential	965	30
Alder St. SE	14th Ave. SE	Lacey Blvd. SE	86	87	89	88	88	Residential	520	42
Traditions Ave. NE	Freemont Ave. NE	Edgewater Blvd. NE	88	88	89	87	87	Residential	575	31
26th Ave. SE	Golf Club Rd. SE	College St. SE	86	87	89	85	87	Residential	1420	43
Vashon Dr. NE	Cypress Lp. NE	Meriwood Dr. NE	88	88	89	87	87	Residential	1620	31
Vermont Ave. SE	Ruddell Rd. SE	Pennsylvania St. SE	88	89	89	87	88	Residential	630	40
Virginia St. SE	66th Ave. SE	Yelm Hwy. SE	86	87	89	87	89	Residential	1300	37
21st Ave. SE	Judd St. SE	Ruddell Rd. SE	87	89	89	90	92	Residential	1070	41
21st Ave. SE	Judd St. SE	End of Road	87	89	89	87	89	Residential	620	34
Whidbey Rd. NE	41st Ave. NE	Bainbridge Lp. NE	88	88	89	87	86	Residential	390	31
14th Way SE	Golf Club Rd. SE	College St. SE	89	89	89	88	89	Residential	1280	35
14th Ct. SE	14th Ave. SE	End of Road	88	89	89	86	87	Residential	680	31
Yonkers Dr. SE	Hanover Dr. SE	Clearbrook Dr. SE	87	89	89	86	87	Residential	930	30
33rd Ave. SE	Ida Jane Way SE	Stanfield Rd. SE	85	87	89	87	87	Residential	1280	42
Spokane St. NE	Spokane Ct. NE	Vashon Dr. NE	88	88	89	89	86	Residential	875	31
Sarazen St. SE	Balustrade Blvd. SE	66th Ave. SE	89	89	89	88	87	Residential	680	31
Seville Dr. SE	47th Ave. SE	45th Ave. SE	86	88	89	90	89	Residential	670	30
Seville Dr. SE	45th Ave. SE	Kapalea Way SE	88	88	89	89	90	Residential	1140	31
Fairhill Dr. NE	31st Ave. NE	White Fir Dr. NE	88	88	89	86	87	Residential	550	31
Shirley St. SE	25th Ave. SE	22nd Ave. SE	87	88	89	87	87	Residential	990	34
Breeze Dr. SE	Balustrade Blvd. SE	66th Way SE	88	89	89	88	89	Residential	1000	31
Boone St. SE	14th Ave. SE	End of Road	85	87	89	88	90	Residential	650	34
Blade St. SE	Balustrade Blvd. SE	66th Ave. SE	89	89	89	88	87	Residential	680	31
Diamond Rd. SE	Diamond Lp. SE	Carpenter Rd. SE	87	88	89	90	94	Residential	700	36
Spokane St. NE	Vashon Dr. NE	Spokane Ct. NE	88	88	89	88	86	Residential	735	31
70th Ave. SE	Radius Lp. SE	Bailey St. SE	88	88	89	88	88	Residential	1150	31
Bend Dr. NE	Spokane St. NE	Spokane St. NE	88	89	89	88	87	Residential	1240	31
Santis Lp. SE	Rossberg St. SE	Zermatt St. SE	87	88	89	88	89	Residential	910	30
Steamer Dr. SE	Compton Blvd. SE	Baldwin St. SE	87	88	89	87	87	Residential	830	30
Beam St. SE	Radius Lp. SE	70th Way SE	88	89	89	88	87	Residential	280	31
Steamer Dr. SE	Baldwin St. SE	Compton Blvd. SE	87	88	89	88	87	Residential	920	30
Baldwin St. SE	Compton Blvd. SE	Steamer Dr. SE	87	88	89	88	87	Residential	210	30
Bainbridge Lp. NE	Whidbey Rd. NE	Jubilee Rd. NE	88	88	89	88	86	Residential	830	31
Bainbridge Lp. NE	Whidbey Rd. NE	Whidbey Rd. NE	88	88	89	88	86	Residential	1160	31
Bainbridge Lp. NE	Jubilee Rd. NE	Jubilee Rd. NE	84	88	89	87	86	Residential	730	29

Street Name	Begin Location	End Location	2018	2017	2016	2015	2014	Func. Class	Length (ft)	RSL
Bailey St. SE	Balustrade Blvd. SE	66th Ave. SE	89	89	89	87	87	Residential	810	31
Bailey St. SE	Radius Lp. SE	Balustrade Blvd. SE	88	88	89	88	87	Residential	1380	31
Avonlea Dr. SE	45th Ave. SE	Kapalea Way SE	88	88	89	90	92	Residential	1140	31
Arcarro Ct. SE	Ruddell Rd. SE	End of Road	87	89	89	87	87	Residential	874	30
Beta St. SE	Chambers Lake Dr. SE	21st Ave. SE	86	87	89	85	89	Residential	1190	43
McKinley St. NE	Dominion Ave. NE	Rushmore Ave. NE	87	87	89	89	86	Residential	1270	30
Judd St. SE	24th Ave. SE	22nd Ave. SE	87	87	89	75	82	Residential	570	24
McKinley St. NE	Rushmore Ave. NE	Keystone Ave. NE	88	88	89	88	86	Residential	902	31
Fairhill Dr. NE	White Fir Dr. NE	East End of Road	87	88	89	87	87	Residential	650	30
Fresco Dr. SE	Balustrade Blvd. SE	Breeze St. SE	88	89	89	89	89	Residential	890	31
Indiana St. SE	Colorado Ave. SE	Delaware Ave. SE	88	89	89	88	89	Residential	660	31
Meriwood Dr. NE	Vashon Dr. NE	Anderson Ct. NE	88	88	89	89	89	Residential	500	39
Flute St. SE	Radius Lp. SE	Balustrade Blvd. SE	88	88	89	88	87	Residential	950	31
Meriwood Dr. NE	Williamette Dr. NE	Gate	89	89	89	87	87	Residential	1260	32
Ingleside Dr. SE	Kapalea Way SE	End of Road	88	88	89	89	89	Residential	1000	31
Lupine St. NE	Campus Glen Dr. NE	Campus Meadows Lp. NE	89	89	89	88	87	Residential	360	32
Kodiak Ave. NE	Freemont St. NE	Edgewater Blvd. NE	88	89	89	88	86	Residential	709	31
Ken-Jan Ct. SE	Greenbriar St. SE	End of Road	89	89	89	87	87	Residential	290	31
Keystone Ave. NE	McKinley St. NE	Cashmere Dr. NE	88	88	89	88	87	Residential	489	31
Gemini St. SE	15th Ave. SE	Alder St. SE	86	87	89	87	88	Residential	840	42
Freemont St. NE	Traditions Ave. NE	Columbia Way NE	88	88	89	88	86	Residential	1336	31
Mercer Ct. NE	Vashon Dr. NE	End of Road	89	89	89	88	87	Residential	407	32
Ida Jane Way SE	35th Ave. SE	33rd Ave. SE	86	87	89	89	87	Residential	540	34
Jubilee Rd. NE	41st Ave. NE	Bainbridge Lp. NE	87	87	89	85	85	Residential	390	30
Lopez Ct. NE	Vashon Dr. NE	End of Road	88	89	89	88	87	Residential	312	31
Ipsut Ct. SE	Mt. Tahoma Dr. SE	End of Road	93	87	89	85	83	Residential	530	37
Inlay St. SE	Balustrade Blvd. SE	66th Ave. SE	89	89	89	88	87	Residential	660	31
Larch St. SE	25th Ave. SE	22nd Ave. SE	88	89	89	88	86	Residential	990	35
Ingleside Way SE	Ingleside Dr. SE	Avonlea Dr. SE	88	88	89	92	92	Residential	250	31
Fairweather St. NE	End of Road (alley)	End of Road (alley)	88	88	89	89	87	Residential	370	31
Golf Club Rd. SE	Chambers Lake Dr. SE	22nd Ave. SE	87	88	89	85	87	Residential	1140	45
Ingleside Dr. SE	Kapalea Way SE	Zermatt St. SE	88	88	89	89	85	Residential	820	31
Logan Dr. NE	McKinley St. NE	Keystone Ave. NE	89	89	89	88	87	Residential	893	32
56th Ave. SE	Boardwalk St. SE	Parkside Dr. SE	86	86	88	86	87	Residential	735	37
Campus Green Dr. NE	Williamette Dr. NE	Campus Green Ct. NE	85	86	88	87	86	Residential	840	29
44th Ct. SE	Greenbriar St. SE	East End of Road	88	88	88	87	86	Residential	450	31
Mt. Olympus St. SE	Yelm Hwy. SE	56th Ave. SE	87	88	88	86	85	Residential	680	30
46th Ave. NE	Hilton Rd. NE	Meridian Rd. NE	87	87	88	88	89	Residential	2370	37

Street Name	Begin Location	End Location	2018	2017	2016	2015	2014	Func. Class	Length (ft)	RSL
Radius Lp. SE	Bailey St. SE	Balustrade Blvd. SE	88	88	88	88	87	Residential	1300	31
Compass St. SE	71st Ave. SE	Balustrade Blvd. SE	85	86	88	87	87	Residential	1160	36
Timberline Dr. SE	Mullen Rd. SE	Clearwater Dr. SE	87	87	88	87	90	Residential	540	34
32nd Ct. SE	Impala Dr. SE	End of Road	86	87	88	88	86	Residential	130	43
Sycamore St. SE	25th Ave. SE	22nd Ave. SE	87	88	88	88	89	Residential	1090	30
34th Ave. SE	Stanfield Rd. SE	East End of Road	88	88	88	85	87	Residential	230	31
Rushmore Ave. NE	Rushmore Way NE	Cashmere Dr. NE	87	87	88	88	86	Residential	999	30
Prism St. SE	Radius Lp. SE	Balustrade Blvd. SE	87	88	88	87	87	Residential	1660	30
Kapalea Way SE	Shale St. SE	Galena St. SE	87	88	88	89	87	Residential	550	30
Stone St. SE	Radius Lp. SE	Balustrade Blvd. SE	87	88	88	87	87	Residential	1610	30
Mt. Baker St. SE	57th Ave. SE	56th Ave. SE	87	88	88	87	86	Residential	410	30
Greenbriar St. SE	45th Ave. SE	End of Road	88	88	88	84	86	Residential	740	31
Mt. Adams St. SE	57th Ave. SE	56th Ave. SE	87	88	88	87	86	Residential	550	30
48th Lp. SE	48th Ave. SE	48th Ave. SE	87	88	88	87	86	Residential	990	30
Red Cedar Ct. SE	37th Ave. SE	End of Road	87	88	88	87	86	Residential	260	30
Delaware Ave. SE	Virginia St. SE	Balustrade Blvd. SE	86	87	88	88	89	Residential	1115	37
Alpha St. SE	Chambers Lake Dr. SE	21st Ave. SE	85	85	88	87	89	Residential	1250	41
Silver Maple Ct. SE	37th Ave. SE	End of Road	87	87	88	86	86	Residential	450	30
Axis St. SE	Radius Lp. SE	Balustrade Blvd. SE	87	88	88	87	87	Residential	1600	30
Beltway Lp. SE	60th Ave. SE	60th Ave. SE	84	86	88	85	84	Residential	1260	28
23rd Ave. SE	Golf Club Rd. SE	College St. SE	84	86	88	83	85	Residential	1270	39
71st Ave. SE	Compass St. SE	Bailey St. SE	86	88	88	86	89	Residential	1370	38
58th Ct. SE	57th Ave. SE	End of Road	85	87	88	85	85	Residential	460	29
Maxine St. SE	25th Ave. SE	22nd Ave. SE	84	85	88	88	87	Residential	990	32
Koala St. SE	Stikes Woods Dr. SE	Ruddell Rd. SE	86	87	88	85	85	Residential	540	30
Forest Ct. SE	37th Ave. SE	End of Road	87	88	88	87	86	Residential	200	30
13th Ave. SE	Willow St. SE	Golf Club Rd. SE	87	88	88	87	85	Residential	410	34
57th Ct. SE	Stockton St. SE	End of Road	85	87	88	85	86	Residential	370	29
Mt. Saint Helens St. SE	57th Ave. SE	56th Ave. SE	87	88	88	87	86	Residential	540	30
Jason Ct. SE	54th Ave. SE	End of Road	86	87	88	85	86	Residential	230	30
57th Ave. SE	Vincent Ct. SE	Rumac St. SE	85	87	88	85	85	Residential	530	29
Banbury Pl. SE	37th Ave. SE	36th Ct. SE	86	87	88	85	86	Residential	290	30
Jessica Ct. SE	Komachin Lp. SE	End of Road	85	87	87	86	87	Residential	240	29
Bainbridge Lp. NE	Jubilee Rd. NE	Whidbey Rd. NE	88	88	87	87	85	Residential	880	31
Angela St. SE	25th Ave. SE	22nd Ave. SE	86	87	87	85	87	Residential	990	34
Jeffrey Ct. SE	Komachin Lp. SE	End of Road	86	87	87	87	87	Residential	380	30
Bainbridge Ct. NE	Bainbridge Lp. NE	End of Road	86	86	87	87	86	Residential	650	30
43rd Ct. SE	Park Place Lp. SE	End of Road	85	87	87	86	87	Residential	490	29

Street Name	Begin Location	End Location	2018	2017	2016	2015	2014	Func. Class	Length (ft)	RSL
Mowich Ct. SE	54th Ave. SE	End of Road	93	86	87	85	89	Residential	400	37
Campus Meadows Lp. NE	Campus Glen Dr. NE	Snowberry St. NE	85	87	87	86	86	Residential	685	35
Montclair Dr. SE	Montclair Ct. SE	End of Road	86	87	87	87	88	Residential	1120	30
56th Ave. SE	Mt. Baker St. SE	Ruddell Rd. SE	85	85	87	86	86	Residential	1140	29
57th Ave. SE	Mt. Baker St. SE	Mt. Adams St. SE	85	85	87	86	85	Residential	1090	29
56th Lp. SE	56th Ave. SE	56th Ave. SE	86	87	87	85	87	Residential	800	37
Sunview Ct. SE	Crimson Ct. SE	End of Road	84	85	87	85	84	Residential	190	28
Hogum Bay Ext. Rd. NE	Hogum Bay Rd. NE	Landfill Rd. NE (gate)	87	87	87	85	87	Residential	800	30
Campus Glen Dr. NE	Willamette Dr. NE	Lupine St. NE	86	86	87	85	86	Residential	1580	37
Stikes Woods Dr. SE	Koala St. SE	37th Ave. SE	85	85	87	87	86	Residential	310	29
Campus Glen Dr. NE	Lupine St. NE	Campus Park Dr. NE	86	86	87	85	86	Residential	1530	37
48th Ave. SE	Rosemont Ct. SE	Crosswaters St. SE	86	87	87	85	86	Residential	790	30
Camano Ct. NE	Camano Lp. NE	End of Road	87	87	87	86	84	Residential	370	30
Stockton St. SE	54th Ave. SE	End of Road	86	87	87	84	85	Residential	300	30
Catalina Dr. SE	Belair Dr. SE	End of Road	85	86	87	83	83	Residential	430	42
50th Ave. SE	College St. SE	Boardwalk St. SE	86	87	87	87	85	Residential	860	30
Rustin Ct. SE	Komachin Lp. SE	End of Road	86	87	87	86	86	Residential	160	30
48th Ave. SE	Crosswaters St. SE	End of Road	87	87	87	86	86	Residential	810	30
57th Ct. SE	Rumac St. SE	End of Road	85	87	87	85	84	Residential	400	29
Edgewater Blvd. NE	Rushmore Ave. NE	Columbia Way NE	85	85	87	87	86	Residential	996	37
28th Ct. NE	Hogum Bay Rd. NE	End of Road	87	87	87	84	85	Residential	1160	30
Cory Ct. SE	61st Ave. SE	End of Road	84	86	87	85	85	Residential	190	28
Crimson Ct. SE	Yelm Hwy. SE	End of Road	84	87	87	84	86	Residential	830	28
17th Ave. SE	Homann Dr. SE	Alanna Dr. SE	84	86	87	85	86	Residential	690	32
15th Ave. SE	Homann Dr. SE	Alanna Dr. SE	86	87	87	85	87	Residential	810	34
26th Lp. SE	26th Ave. SE	26th Ave. SE	85	86	87	87	84	Residential	1150	41
26th Ct. SE	Carpenter Rd. SE	End of Road	86	87	87	84	86	Residential	450	30
Tyler Ct. SE	Komachin Lp. SE	End of Road	86	87	87	87	87	Residential	260	30
25th Lp. SE	25th Ave. SE	25th Ave. SE	83	85	87	86	83	Residential	1640	28
Timberline Ct. SE	Timberline Dr. SE	End of Road	85	87	87	84	88	Residential	190	42
Summerwalk St. SE	56th Ave. SE	54th Ave. SE	88	87	87	88	87	Residential	415	31
Craney Ct. SE	Sidney St. SE	East End of Road	86	86	87	87	86	Residential	410	30
Park Place Lp. SE	45th Ave. SE	44th Ct. SE	84	87	87	86	85	Residential	820	28
Komachin Lp. SE	Tyler Ct. SE	Jeffery Ct. SE	85	86	87	86	87	Residential	930	29
Edgewater Blvd. NE	41st Ave. NE	Rushmore Ave. NE	83	84	87	87	86	Residential	1519	34
Wade Ct. SE	Komachin Lp. SE	End of Road	86	87	87	85	87	Residential	390	30
Komachin Lp. SE	Jeffery Ct. SE	Rustin Ct. SE	85	87	87	87	87	Residential	550	29
15th Ct. SE	15th Ave. SE	End of Road	86	87	87	86	86	Residential	180	30

Street Name	Begin Location	End Location	2018	2017	2016	2015	2014	Func. Class	Length (ft)	RSL
Donegal Ct. SE	Hicks Lake Rd. SE	End of Road	87	87	87	85	86	Residential	530	30
18th Ave. SE	Homann Dr. SE	Alanna Dr. SE	84	85	87	85	84	Residential	630	32
16th Ave. SE	Homann Dr. SE	Alanna Dr. SE	84	86	87	85	86	Residential	750	32
Flute St. SE	Balustrade Blvd. SE	66th Way SE	86	87	87	86	85	Residential	830	38
James St. SE	57th Ave. SE	Stockton St. SE	86	86	87	85	85	Residential	790	30
34th Ave. SE	Ida Jane Way SE	Stanfield Rd. SE	84	85	87	85	86	Residential	1080	40
36th Ct. SE	Banbury Pl. SE	End of Road	86	87	87	85	85	Residential	430	30
Switchback Lp. SE	Compass St. SE	Compass St. SE	87	87	87	87	87	Residential	1070	30
Chardonnay Dr. SE	Yelm Hwy. SE	Merlot Ln. SE	86	86	87	86	85	Residential	510	30
10th Ave. SE	Golf Club Rd. SE	End of Road	87	87	87	85	86	Residential	265	30
Clearwater Dr. SE	Timberline Dr. SE	Clearwater Lp. SE	83	84	87	87	89	Residential	640	38
Quail Dr. SE	45th Ave. SE	43rd Ave. SE	86	86	87	85	86	Residential	620	30
Quail Dr. SE	43rd Ave. SE	End of Road	84	86	87	85	86	Residential	560	28
13th Ave. SE	Crowe St. SE	College St. SE	85	86	87	85	86	Residential	870	41
Columbine Ct. SE	57th Ave. SE	End of Road	85	87	87	84	83	Residential	430	29
Sycamore St. SE	22nd Ave. SE	Gemini St. SE	87	88	87	88	86	Residential	1100	30
39th Ct. SE	Carpenter Rd. SE	End of Road	87	87	87	86	86	Residential	570	30
Sunset Dr. SE	Maple Hills Dr. SE	26th Ave. SE	82	84	87	51	55	Residential	740	27
Clearwater Lp. SE	Clearwater Dr. SE	Clearwater Lp. SE	84	85	87	86	89	Residential	1740	40
66th Ave. SE	Ruddell Rd. SE	Balustrade Blvd. SE	86	87	86	87	89	Residential	1200	37
Stikes Dr. SE	47th Ave. SE	End of Road	83	85	86	86	85	Residential	490	28
Strawberry Ct. SE	54th Ave. SE	End of Road	84	85	86	86	86	Residential	540	28
61st Lp. SE	61st Ave. SE	Stockton St. SE	84	86	86	85	85	Residential	740	28
61st Ave. SE	61st Lp. SE	Stockton St. SE	84	86	86	85	85	Residential	560	28
Borealis Ct. NE	Williamette Dr. NE	End of Road	83	84	86	85	87	Residential	1020	28
21st Ave. SE	West Lake Dr. SE	Sleater Kinney Rd. SE	89	84	86	87	90	Residential	830	36
Zermatt St. SE	Ingleside Dr. SE	37th Ave. SE	83	84	86	88	89	Residential	840	33
Zenith Ct. NE	Williamette Dr. NE	End of Road	81	85	86	83	86	Residential	290	27
Boardwalk St. SE	56th Ave. SE	53rd Ave. SE	86	86	86	87	87	Residential	660	37
Stockton St. SE	60th Ave. SE	58th Ave. SE	84	84	86	86	85	Residential	870	28
Carpenter Ct. SE	Diamond Lp. SE	End of Road	84	85	86	84	85	Residential	190	29
Muir Ct. SE	54th Ave. SE	End of Road	91	86	86	83	84	Residential	380	36
Thornbury Pl. SE	61st Ave. SE	End of Road	84	84	86	84	85	Residential	440	28
33rd Ct. SE	Ruddell Lp. SE	End of Road	84	86	86	84	86	Residential	1300	28
Mt. Rainier St. SE	57th Ave. SE	56th Ave. SE	85	86	86	85	83	Residential	540	29
Camaro Ct. SE	31st Ave. SE	End of Road	84	85	86	83	86	Residential	260	40
Vincent Ct. SE	57th Ave. SE	End of Road	83	85	86	84	85	Residential	320	28
27th Ct. SE	College St. SE	End of Road	84	85	86	84	86	Residential	530	38

Street Name	Begin Location	End Location	2018	2017	2016	2015	2014	Func. Class	Length (ft)	RSL
61st Ave. SE	Thornbury Pl. SE	61st Lp. SE	84	86	86	84	85	Residential	1140	28
Hall St. SE	14th Ave. SE	Lacey Blvd. SE	85	88	86	84	84	Residential	1400	41
Rosemont Ct. SE	Mullen Rd. SE	End of Road	87	86	86	85	85	Residential	300	30
Inlay St. SE	Radius Lp. SE	Balustrade Blvd. SE	85	86	86	85	87	Residential	1660	36
54th Ave. SE	Boardwalk St. SE	Summerwalk St. SE	84	86	86	87	87	Residential	470	34
Radius Lp. SE	Balustrade Blvd. SE	71st Ave. SE	85	86	86	86	84	Residential	1180	36
Violet St. SE	14th Ave. SE	Lacey Blvd. SE	84	84	86	86	85	Residential	580	40
15th Ave. SE	Golf Club Rd. SE	College St. SE	85	85	85	85	87	Residential	1300	33
Willow St. SE	14th Ave. SE	Lacey Blvd. SE	85	85	85	83	85	Residential	1080	41
Lebanon St. SE	20th Ave. SE	14th Ave. SE	84	84	85	82	81	Residential	1670	34
14th Ave. SE	Nobel Firs Ct. SE	End of Road	82	85	85	82	84	Residential	1500	27
15th Ave. SE	Nobel Firs Ct. SE	End of Road	84	85	85	82	86	Residential	620	29
57th Ave. SE	Stockton St. SE	Vincent Ct. SE	81	84	85	84	83	Residential	810	26
41st Ave. SE	Stikes Dr. SE	Quail Dr. SE	84	85	85	85	87	Residential	690	28
47th Ave. SE	Stikes Dr. SE	Parkside Dr. SE	84	85	85	83	83	Residential	780	28
34th Ct. SE	Impala Dr. SE	East End of Road	84	85	85	84	85	Residential	180	40
34th Ct. SE	Impala Dr. SE	West End of Road	82	83	85	84	88	Residential	130	36
33rd Ct. SE	Impala Dr. SE	West End of Road	84	85	85	86	88	Residential	130	40
31st Ct. SE	31st Ave. SE	End of Road	84	85	85	86	87	Residential	170	40
Komachin Lp. SE	54th Ave. SE	Tyler Ct. SE	83	84	85	84	86	Residential	830	28
Timberline Dr. SE	Clearwater Dr. SE	Timberline Ct. SE	83	84	85	85	88	Residential	720	38
Alhadeff St. SE	Pacific Ave. SE	End of public street (sign)	83	85	85	85	85	Residential	400	28
57th Way SE	Parkside Dr. SE	Mt. Baker St. SE	84	85	85	85	86	Residential	1030	28
58th Ave. SE	57th Ave. SE	Stockton St. SE	82	84	85	83	84	Residential	1180	27
66th Way SE	Bailey St. SE	End of Road	84	85	85	85	84	Residential	650	34
70th Way SE	Rainier Rd. SE	Radius Lp. SE	85	85	85	85	75	Residential	450	36
Komachin Lp. SE	Rustin Ct. SE	Stockton St. SE	83	84	85	84	87	Residential	570	28
Stockton St. SE	Compton Blvd. SE	60th Ave. SE	81	83	85	85	88	Residential	790	27
Alexander Dr. NE	Mercedes Dr. NE	Mercedes Dr. NE	81	83	85	85	85	Residential	1040	27
30th Ct. SE	Impala Dr. SE	End of Road	82	83	85	83	87	Residential	450	36
Radius Lp. SE	71st Ave. SE	Bailey St. SE	85	86	85	87	87	Residential	1590	36
Cora St. SE	Mary Lou St. SE	12th Ave. SE	80	83	85	85	86	Residential	610	27
Daniels Lp. SE	Compton Blvd. SE	Compton Blvd. SE	84	85	85	85	85	Residential	1120	28
Craney Ct. SE	Sidney St. SE	West End of Road	86	84	85	85	86	Residential	240	30
Park Place Lp. SE	43rd Ave. SE	45th Ave. SE	84	85	85	86	86	Residential	790	28
Robbins St. SE	03rd Ave. SE	End of Road	85	85	85	85	86	Residential	350	36
Mary Lou St. SE	12th Ave. SE	Lisa Ln. SE	83	85	85	87	87	Residential	620	31
Boone St. SE	12th Ave. SE	End of Road	80	83	85	87	89	Residential	380	27

Street Name	Begin Location	End Location	2018	2017	2016	2015	2014	Func. Class	Length (ft)	RSL
Crowe St. SE	Lacey Blvd. SE	End of Road	81	82	85	84	85	Residential	660	35
Crosswaters St. SE	Mullen Rd. SE	48th Ave. SE	84	84	85	87	86	Residential	140	29
Park Center Ave. NE	College St. NE	End of Road	83	84	85	84	85	Residential	600	28
Park Place Lp. SE	Mullen Rd. SE	43rd Ave. SE	80	83	85	85	86	Residential	890	26
Brunswick St. SE	16th Ave. SE	North End of Road	100	84	85	83	81	Residential	340	34
Noble Firs Ct. SE	14th Ave. SE	End of Road	84	85	85	84	86	Residential	430	29
Hogum Bay Rd. NE	Hawks Prairie Rd. NE	End of Road	84	84	84	84	85	Residential	1800	33
Commerce Place Dr. NE	Williamette Dr. NE	North End of Road	81	82	84	83	85	Residential	1680	27
60th Ave. SE	Stockton St. SE	Compton Blvd. SE	82	84	84	82	83	Residential	1090	27
14th Ave. SE	Lebanon St. SE	Clearbrook Dr. SE	80	82	84	84	85	Residential	810	26
Thornbury Ct. SE	Thornbury Dr. SE	End of Road	83	84	84	84	86	Residential	520	28
Rumac St. SE	Pattison Lake Dr. SE	End of Road	82	82	84	85	84	Residential	1160	27
Thornbury Dr. SE	57th Ave. SE	54th Ave. SE	82	83	84	84	85	Residential	750	27
Compton Lp. SE	Compton Blvd. SE	Compton Blvd. SE	84	84	84	84	81	Residential	980	28
Campus Highlands Dr. NE	Willamette Dr. NE	Cameron Dr. NE	82	82	84	84	85	Residential	1750	31
14th Ave. SE	Carpenter Rd. SE	Nobel Firs Ct. SE	82	83	84	81	80	Residential	550	27
08th Ave. NE	College St. NE	Livingston St. NE	82	83	84	84	86	Residential	1200	38
Arbor Dr. SE	39th Ct. SE	37th Ct. SE	82	83	84	81	85	Residential	720	27
Madrona Ct. SE	38th Dr. SE	End of Road	83	84	84	82	80	Residential	500	28
Stikes Dr. SE	47th Ave. SE	45th Ave. SE	81	83	84	84	85	Residential	740	26
60th Ct. SE	Thornbury Dr. SE	End of Road	83	84	84	84	86	Residential	420	28
Foxglove Ct. SE	Rumac St. SE	End of Road	83	84	84	81	82	Residential	480	28
Thornbury Dr. SE	Thornbury Pl. SE	57th Ave. SE	82	82	84	84	85	Residential	1450	27
Crystal Ct. SE	58th Ave. SE	End of Road	82	83	84	82	84	Residential	310	27
60th Lp. SE	Stockton St. SE	Stockton St. SE	82	82	84	84	80	Residential	1270	27
39th Ave. SE	Arbor Dr. SE	End of Road	83	84	84	82	80	Residential	890	28
Jacobson Ct. SE	57th Ave. SE	End of Road	84	83	84	82	83	Residential	150	28
Impala Dr. SE	31st Ave. SE	End of Road	82	84	84	84	87	Residential	1030	36
57th Ave. SE	Thornbury Dr. SE	Stockton St. SE	83	81	83	82	85	Residential	1280	28
Church St. SE	14th Ave. SE	Lacey Blvd. SE	79	81	83	83	85	Residential	330	27
Diamond Lp. SE	Diamond Rd. SE	Diamond Rd. SE	81	81	83	83	83	Residential	1310	27
57th Ave. SE	Emerald St. SE	Thornbury Dr. SE	81	83	83	83	85	Residential	470	26
31st Ave. SE	College St. SE	Impala Dr. SE	85	85	83	82	84	Residential	990	41
Juliann Ct. SE	Komachin Lp. SE	End of Road	82	83	83	83	86	Residential	340	27
50th Ct. SE	50th Ave. SE	End of Road	82	83	83	83	86	Residential	540	27
Park Place Lp. SE	44th Ct. SE	Mullen Rd. SE	82	83	83	83	86	Residential	530	27
Koala St. SE	39th Ave. SE	Stikes Woods Dr. SE	84	85	83	80	82	Residential	1160	28
River Ridge Dr. SE	Martin Way E.	End of Road (gate)	81	81	83	79	83	Residential	720	27

Street Name	Begin Location	End Location	2018	2017	2016	2015	2014	Func. Class	Length (ft)	RSL
Vashon Dr. NE	41st Ave. NE	Camano Lp. NE	81	81	83	83	80	Residential	740	31
44th Ct. SE	Greenbriar St. SE	West End of Road	83	83	83	83	86	Residential	670	28
39th Ct. SE	Arbor Dr. SE	End of Road	82	83	83	81	82	Residential	120	27
Corvette Ct. NE	Mercedes Dr. NE	End of Road	80	82	83	84	83	Residential	230	26
53rd Ave. SE	Lakehills St. SE	End of Road	80	81	83	82	81	Residential	190	26
Belair Dr. SE	Catalina Dr. SE	Impala Dr. SE	87	89	83	82	79	Residential	770	34
Stockton St. SE	58th Ave. SE	54th Ave. SE	81	83	83	84	81	Residential	1280	26
Eagle Dr. NE	Bonanza Dr. NE	City Limits	81	83	83	82	85	Residential	630	27
Muriel Ct. SE	27th Ct. SE	End of Road	82	83	83	84	87	Residential	620	27
Magnolia Ct. SE	38th Dr. SE	End of Road	82	83	83	84	81	Residential	250	27
Lake Hills St. SE	54th Ave. SE	Emerald St. SE	80	81	83	82	82	Residential	780	26
16th Ave. SE	Golf Club Rd. SE	College St. SE	78	81	83	82	86	Residential	1270	27
Sleater Kinney Rd. SE	Leisure Way SE	21st Ave. SE	81	81	83	82	86	Residential	1290	34
Livingston St. NE	8th Ave. NE	15th Ave. NE	80	81	83	83	83	Residential	960	34
Elm Ct. SE	Cedar Ct. SE	End of Road	79	81	82	82	84	Residential	210	25
Aldea Ct. SE	5th Way SE	End of Road	82	82	82	82	84	Residential	580	27
Magnolia St. SE	16th Ave. SE	South End of Road	100	81	82	81	81	Residential	360	34
Lakeview Dr. SE	30th Ave. SE	29th Ave. SE	81	82	82	82	75	Residential	630	26
Kendra Ct. SE	James St. SE	End of Road	84	82	82	80	81	Residential	320	28
Afflerbaugh Dr. SE	Mullen Rd. SE	City Limits	79	81	82	78	80	Residential	1020	25
40th Ct. SE	Ruddell Rd. SE	End of Road	79	79	82	79	82	Residential	500	25
Belair Dr. SE	College St. SE	Catalina Dr. SE	87	89	82	81	81	Residential	430	30
Cherokee Lp. SE	60th Ave. SE	60th Ave. SE	81	82	82	81	84	Residential	1280	27
58th Ave. SE	Opal Ct. SE	Thornbury Dr. SE	79	80	82	83	80	Residential	1060	25
Angela St. SE	25th Lp. SE	25th Ave. SE	79	80	82	82	85	Residential	460	34
Impala Dr. SE	31st Ave. SE	28th Ave. SE	80	82	82	81	83	Residential	1100	33
32nd Ave. NE	Marvin Rd. NE	East End of Eagle Ct. Plat	81	82	82	81		Residential	1430	27
59th Lp. SE	Stockton St. SE	Stockton St. SE	80	80	82	81	85	Residential	1270	26
Woodland Square Lp. SE	7th Ave. SE	6th Ave. SE	78	79	81	81	80	Residential	1750	24
05th Way SE	Carpenter Rd. SE	Glen Ct. SE	77	80	81	79	83	Residential	1150	24
Candace Ct. SE	Komachin Lp. SE	End of Road	79	81	81	81	83	Residential	420	30
Stikes Dr. SE	41st Ave. SE	39th Ave. SE	83	81	81	82	83	Residential	750	28
38th Dr. SE	Carpenter Rd. SE	39th Ave. SE	80	81	81	79	83	Residential	870	26
Stikes Dr. SE	45th Ave. SE	41st Ave. SE	77	79	81	80	83	Residential	850	24
Bentley Ct. NE	Mercedes Dr. NE	End of Road	79	79	81	81	82	Residential	130	25
Commerce Place Dr. NE	Williamette Dr. NE	South End of Road	77	79	81	82	80	Residential	850	24
Long Lake Dr. SE	32nd Ave. SE	City Limits	80	81	81	81	84	Residential	650	26
Beemer Ct. NE	Classic Dr. NE	End of Road	80	80	81	81	84	Residential	280	26

Street Name	Begin Location	End Location	2018	2017	2016	2015	2014	Func. Class	Length (ft)	RSL
Jaguar Ct. NE	Alexander Dr. NE	End of Road	78	80	81	82	85	Residential	220	25
Gem Ct. SE	58th Ave. SE	End of Road	79	80	81	79	82	Residential	140	25
Diamond Ct. SE	Diamond Lp. SE	End of Road	81	82	81	80	83	Residential	320	27
38th Ct. SE	Arbor Dr. SE	East End of Road	80	81	81	77	79	Residential	210	26
Sidney St. SE	39th Ave. SE	End of Road	82	80	81	80	84	Residential	1280	27
Compton Blvd. SE	Yelm Hwy. SE	Stockton St. SE	79	79	81	81	83	Residential	840	25
Classic Dr. NE	Mercedes Dr. NE	Meridian Rd. NE	77	80	81	83	85	Residential	1300	24
Edsel Ct. NE	Mercedes Dr. NE	End of Road	80	80	81	83	81	Residential	110	26
37th Ave. SE	Stikes Dr. SE	End of Road	78	81	81	81	84	Residential	1570	25
Lacey St. SE	Pacific Ave. SE	7th Ave. SE	77	80	81	76	86	Residential	1650	24
Lakeview Ct. SE	37th Ave. SE	End of Road	79	80	81	80	81	Residential	540	25
Judd St. SE	22nd Ave. SE	19th Ave. SE	77	79	81	82	81	Residential	860	24
Royce Ct. NE	Mercedes Dr. NE	End of Road	80	80	81	81	84	Residential	220	26
Judd St. SE	19th Ave. SE	Ruddell Rd. SE	79	81	81	81	72	Residential	1020	25
Mercedes Dr. NE	Royce Ct. NE	Classic Dr. NE	77	80	81	81	85	Residential	840	24
27th Ct. SE	Judd St. SE	End of Road	78	80	80	82	81	Residential	270	24
05th Ct. SE	Kinwood Rd. SE	End of Road	78	79	80	80	82	Residential	540	25
37th Ct. SE	Arbor Dr. SE	End of Road	79	80	80	79	82	Residential	160	25
22nd Ct. SE	22nd Ave. SE	End of Road	79	80	80	81	84	Residential	290	25
Magnolia St. SE	16th Ave. SE	North End of Road	100	79	80	80	82	Residential	380	34
Arbor Dr. SE	37th Ct. SE	End of Road	78	79	80	77	81	Residential	890	25
54th Ave. SE	Thornbury Dr. SE	Stockton St. SE	79	80	80	80	80	Residential	1220	25
Montclair Dr. SE	College St. SE	Montclair Ct. SE	78	78	80	80	84	Residential	460	24
Clearbrook Dr. SE	17th Ct. SE	Yonkers Dr. SE	74	77	80	82	92	Residential	890	22
22nd Ave. SE	Agate Ct. SE	Diamond Lp. SE	81	81	80	81	83	Residential	770	27
Charlotte Ct. SE	36th Ave. SE	End of Road	78	79	79	77	79	Residential	160	25
38th Ct. SE	Arbor Dr. SE	West End of Road	78	79	79	79	84	Residential	180	25
Compton Blvd. SE	60th Ave. SE	Compton Lp. SE	77	77	79	80	84	Residential	720	24
Juniper Ct. SE	Arbor Dr. SE	End of Road	77	79	79	78	80	Residential	190	24
39th Ave. SE	Mullen Rd. SE	Koala St. SE	80	81	79	78	82	Residential	520	26
Fir Ct. SE	43rd Ave. SE	End of Road	78	79	79	79	80	Residential	200	25
Diamond Rd. SE	Diamond Lp. SE	Diamond Lp. SE	80	81	79	81	84	Residential	730	26
Mercedes Dr. NE	Classic Dr. NE	Royce Ct. NE	78	78	79	81	84	Residential	1290	25
Diamond Lp. SE	22nd Ave. SE	Diamond Rd. SE	80	81	79	81	85	Residential	1250	26
Brunswick St. SE	16th Ave. SE	South End of Road	100	77	79	80	82	Residential	300	34
Green Ct. SE	5th Way SE	End of Road	75	77	79	78	83	Residential	140	23
43rd Ave. SE	Carpenter Rd. SE	Juniper Ct. SE	77	79	79	79	82	Residential	850	24
12th Ave. SE	Sleater Kinney Rd. SE	End of Road	77	77	79	79	83	Residential	1200	24

Street Name	Begin Location	End Location	2018	2017	2016	2015	2014	Func. Class	Length (ft)	RSL
Woodland Square Lp. SE	College St. SE	7th Ave. SE	78	79	79	78	80	Residential	1820	24
Blue Finch Ct. SE	39th Ave. SE	End of Road	81	78	78	77	80	Residential	200	26
14th Ave. NE	Galaxy Dr. NE	End of Road	75	77	78	78	80	Residential	240	25
Compton Blvd. SE	Stockton St. SE	60th Ave. SE	74	76	78	78	80	Residential	1210	22
Agate Ct. SE	22nd Ave. SE	End of Road	80	80	78	79	81	Residential	240	26
05th Way SE	Glen Ct. SE	Kinwood Rd. SE	73	76	78	77	79	Residential	1260	22
Tanager Ct. SE	39th Ave. SE	End of Road	81	76	78	77	81	Residential	130	26
Shirley Ct. SE	36th Ave. SE	End of Road	76	77	78	77	81	Residential	150	23
Opal Ct. SE	58th Ave. SE	End of Road	76	77	78	76	79	Residential	220	23
Shadywood Ct. SE	Shady Lane Rd. SE	End of Road	79	80	78	77	84	Residential	300	25
16th Ct. SE	16th Ave. SE	End of Road	75	77	78	79	76	Residential	210	23
38th Dr. SE	Stanfield Rd. SE	38th Lp. SE	77	78	78	80	83	Residential	620	24
25th Ct. SE	25th Ave. SE	End of Road	77	78	78	78	81	Residential	440	24
Cedar Hills Ct. SE	28th Ave. SE	End of Road	75	77	78	79	81	Residential	600	23
Stephan Ct. SE	5th Way SE	End of Road	74	76	78	79	86	Residential	150	22
Wallaby Ct. SE	39th Ave. SE	End of Road	81	77	77	79	81	Residential	140	26
Wellington Lp. SE	Stikes Dr. SE	Stikes Dr. SE	76	77	77	74	77	Residential	620	23
24th Ave. SE	Golf Club Rd. SE	College St. SE	73	75	77	77	79	Residential	1270	22
32nd Ct. SE	Ruddell Rd. SE	East End of Road	74	76	77	76	78	Residential	600	22
14th Ave. SE	Ruddell Rd. SE	15th Ave. SE	70	74	77	80	89	Residential	960	19
29th Ave. NE	Marvin Rd. NE	End of Road	76	76	77	76	78	Residential	1110	24
28th Ave. SE	College St. SE	Impala Dr. SE	76	77	77	78	82	Residential	1190	23
Cedar Ct. SE	43rd Ave. SE	End of Road	74	76	77	77	81	Residential	550	22
Ryan St. SE	39th Ave. SE	37th Ave. SE	85	74	77	77	82	Residential	770	29
Gold Finch Ct. SE	38th Dr. SE	End of Road	75	76	77	79	83	Residential	190	23
55th Way SE	Topaz St. SE	Emerald St. SE	74	76	77	78	83	Residential	740	22
Blue Jay Ct. SE	Gold Finch Dr. SE	End of Road	74	75	77	75	78	Residential	300	22
Carpenter Rd. SE	Mills Landing Ct. SE	Carpenter Rd. SE	76	76	77	74	78	Residential	675	23
39th Ct. SE	39th Ave. SE	End of Road	81	77	77	79	83	Residential	130	26
38th Lp. SE	38th Dr. SE	38th Dr. SE	75	76	77	77	79	Residential	1090	23
Apollo St. SE	39th Ave. SE	End of Road	83	76	77	77	81	Residential	430	28
38th Dr. SE	38th Lp. SE	Carpenter Rd. SE	74	74	77	78	80	Residential	1000	22
37th Ave. SE	Ruddell Rd. SE	Apollo St. SE	75	77	77	77	77	Residential	870	29
Glen Ct. SE	5th Way SE	End of Road	75	76	77	76	78	Residential	230	23
Glen Alda Ct. SE	5th Way SE	End of Road	74	76	77	78	83	Residential	700	22
Clearwater Ct. SE	Clearwater Dr. SE	End of Road	75	77	77	78	73	Residential	115	26
39th Ave. SE	39th Ave. SE	Ruddell Rd. SE	80	81	76	77	81	Residential	1200	26
50th Ave. SE	Ruddell Rd. SE	End of Road	81	75	76	76	67	Residential	1220	26

Street Name	Begin Location	End Location	2018	2017	2016	2015	2014	Func. Class	Length (ft)	RSL
54th Ct. SE	Emerald St. SE	End of Road	74	75	76	77	81	Residential	310	22
Arbor Dr. SE	41st Ave. SE	39th Ct. SE	73	75	76	75	79	Residential	670	22
Jo Ann Ct. SE	36th Ave. SE	End of Road	74	75	76	75	75	Residential	160	22
Stikes Dr. SE	Stikes Dr. SE	End of Road	75	75	76	77	82	Residential	190	23
55th Ct. SE	Emerald St. SE	End of Road	73	74	75	76	81	Residential	260	21
Georgie Ct. SE	36th Ave. SE	End of Road	73	74	75	75	78	Residential	160	22
Carpenter Hills Lp. SE	Carpenter Rd. SE	Carpenter Rd. SE	71	73	75	73	78	Residential	2550	20
39th Ave. SE	Ruddell Rd. SE	Apollo St. SE	78	72	75	72	75	Residential	810	25
Northridge Pl. SE	39th Ave. SE	End of Road	72	74	75	75	80	Residential	400	21
Mt. Tahoma Dr. SE	Mt. Tahoma Ct. SE	54th Ave. SE	77	74	75	72	64	Residential	420	24
Apollo St. SE	39th Ave. SE	37th Ave. SE	76	73	75	75	77	Residential	980	23
Gold Finch Dr. SE	38th Dr. SE	38th Dr. SE	74	74	75	73	74	Residential	1690	22
Judd St. SE	28th Ave. SE	26th Ave. SE	79	81	75	75	79	Residential	1060	25
Lakecrest St. SE	37th Ave. SE	35th Ct. SE	73	72	74	72	76	Residential	440	24
Wilshire Ct. SE	End of Road	End of Road	72	72	74	75	78	Residential	450	21
Chambers Lake Dr. SE	Golf Club Rd. SE	End of Road	71	72	74	74	80	Residential	1370	22
Hemlock Ct. SE	22nd Ave. SE	End of Road	73	74	74	74	78	Residential	200	21
16th Ave. SE	Sulky Dr. SE	Clearbrook Dr. SE	71	73	74	74	75	Residential	480	20
39th Ave. SE	Stikes Dr. SE	Stikes Dr. SE	77	73	74	76	84	Residential	940	24
21st Ct. SE	Golf Club Rd. SE	End of Road	69	72	73	75	78	Residential	520	18
Emerald St. SE	58th Ave. SE	54th Ave. SE	75	75	73	75	83	Residential	1160	23
Stikes Dr. SE	34th Ave. SE	32nd Ave. SE	72	72	73	73	74	Residential	710	21
Pattison Lake Dr. SE	Rumac St. SE	End of Road	71	72	73	70	69	Residential	1140	20
Arbor Ct. SE	43rd Ave. SE	End of Road	67	70	73	76	79	Residential	200	18
33rd Ct. SE	Stikes Dr. SE	West End of Road	71	71	73	75	80	Residential	320	20
34th Ave. SE	Stikes Dr. SE	Ruddell Lp. SE	71	71	73	73	73	Residential	1500	20
35th Ave. SE	"Lakeview Estates" HOA	35th Ct. SE	69	71	73	73	76	Residential	780	21
Maple Hills Dr. SE	Sunset Dr. SE	End of Road	70	71	73	76	78	Residential	950	20
Stikes Lp. SE	Stikes Dr. SE	Stikes Dr. SE	71	71	72	73	77	Residential	810	20
20th Ave. SE	Sycamore Dr. SE	Sulky Dr. SE	69	70	72	73	69	Residential	1000	18
17th Ct. SE	Clearbrook Dr. SE	End of Road	69	70	72	72	76	Residential	150	19
19th Ave. SE	Sulky Dr. SE	Hanover Dr. SE	67	70	72	71	72	Residential	1100	18
29th Ct. SE	29th Ave. SE	End of Road	69	71	72	74	74	Residential	210	19
Stikes Ct. SE	Stikes Dr. SE	End of Road	70	70	72	72	80	Residential	270	22
Sulky Dr. SE	20th Ave. SE	16th Ave. SE	69	71	72	71	69	Residential	930	19
33rd Ave. SE	Stanfield Rd. SE	Carpenter Rd. SE	71	72	72	71	72	Residential	1300	20
39th Ave. SE	College St. SE	Stikes Dr. SE	77	71	72	71	74	Residential	770	24
Madera Ct. SE	Sierra Dr. SE	End of Road	70	70	71	69	68	Residential	330	20

Street Name	Begin Location	End Location	2018	2017	2016	2015	2014	Func. Class	Length (ft)	RSL
Mt. Tahoma Ct. SE	Mt. Tahoma Dr. SE	North End of Road	79	70	71	73	74	Residential	300	25
Topaz St. SE	55th Way SE	54th Way SE	68	70	71	72	76	Residential	240	18
29th Ave. SE	Lakeview Dr. SE	College St. SE	67	69	71	71	74	Residential	1220	19
54th Way SE	Topaz St. SE	Emerald St. SE	68	68	70	71	80	Residential	730	18
Stikes Dr. SE	39th Ave. SE	Mullen Rd. SE	77	69	70	72	78	Residential	1030	24
Sierra Dr. SE	Shady Lane Rd. SE	Sierra Ct. SE	65	66	69	67	68	Residential	1410	17
18th Ave. SE	College St. SE	End of Road	93	65	69	70	72	Residential	1100	33
Nelson Rd. SE	Kapalea Way SE	Ingleside Dr. SE	67	68	69	69	69	Residential	1030	18
Sierra Dr. SE	Sierra Ct. SE	Carpenter Rd. SE	66	67	69	70	70	Residential	1230	17
Mt. Tahoma Ct. SE	Mt. Tahoma Dr. SE	South End of Road	72	66	68	68	71	Residential	420	21
White Top Ave. NE	White Fir Dr. NE	East End of Road	64	65	67	67	75	Residential	180	17
Century Ct. NE	15th Ave. NE	End of Road	66	66	67	68	73	Residential	1020	17
19th Ct. SE	19th Ave. SE	End of Road	66	67	67	68	72	Residential	370	17
Kathy Ct. SE	36th Ave. SE	End of Road	66	67	67	67	68	Residential	150	17
14th Ave. SE	College St. SE	Ruddell Rd. SE	100	65	67	67	67	Residential	1300	34
33rd Lp. SE	33rd Ave. SE	33rd Ave. SE	65	66	67	66	70	Residential	1200	17
38th Ct. SE	Ruddell Rd. SE	End of Road	64	66	67	68	73	Residential	290	16
16th Ave. SE	Sleater Kinney Rd. SE	End of Road	100	64	66	68	73	Residential	680	34
Narada Ct. SE	54th Ave. SE	End of Road	72	64	66	67	74	Residential	410	21
Arbor Dr. SE	Juniper Ct. SE	41st Ave. SE	63	66	66	67	69	Residential	560	17
07th Ave. NE	End of Road	End of Road	63	64	66	67	70	Residential	570	16
Hicks Lake Rd. SE	30th Ave. SE	Donegal Ct. SE	61	66	66	67	73	Residential	940	15
45th Ave. SE	Carpenter Rd. SE	End of Road	60	63	66	67	71	Residential	220	13
30th Ave. SE	Ruddell Rd. SE	End of Road	63	65	66	65	66	Residential	740	16
30th Ave. NE	Hogum Bay Rd. NE	End of Road	64	64	66	64	73	Residential	900	16
35th Ct. SE	35th Ave. SE	End of Road	62	64	66	66	71	Residential	270	16
Westminster Ct. NE	Westminster Dr. NE	End of Road	61	64	66	67	71	Residential	260	15
33rd Ct. SE	Stikes Dr. SE	East End of Road	64	64	66	67	71	Residential	310	16
Hicks Lake Rd. SE	Donegal Ct. SE	25th Ave. SE	63	63	66	64	67	Residential	1070	16
Mt. Tahoma Dr. SE	54th Ave. SE	End of Road	66	63	65	65	68	Residential	800	17
37th Ct. SE	Ruddell Rd. SE	End of Road	59	62	65	65	69	Residential	270	14
Hanover Dr. SE	20th Ave. SE	19th Ave. SE	64	65	65	66	63	Residential	1000	16
18th Ave. SE	Sulky Dr. SE	17th Ct. SE	62	62	65	64	68	Residential	720	15
32nd Ct. SE	Ruddell Rd. SE	West End of Road	63	65	65	65	68	Residential	450	16
Stikes Dr. SE	37th Ave. SE	34th Ave. SE	62	62	64	64	63	Residential	750	16
White Top Ave. NE	White Fir Dr. NE	West End of Road	60	61	64	63	67	Residential	180	14
Homann Dr. SE	15th Ave. SE	Pacific Ave. SE	62	62	64	64	64	Residential	1410	15
20th Ave. SE	Sulky Dr. SE	Hanover Dr. SE	61	62	64	64	69	Residential	740	15

Street Name	Begin Location	End Location	2018	2017	2016	2015	2014	Func. Class	Length (ft)	RSL
30th Ave. SE	Lakeview Dr. SE	29th Ave. SE	63	64	64	66	69	Residential	980	16
Sierra Ct. SE	Sierra Dr. SE	End of Road	61	61	63	63	65	Residential	500	15
Webb St. SE	Pacific Ave. SE	End of Road	64	61	62	64	68	Residential	410	16
19th Ave. SE	Golf Club Rd. SE	College St. SE	100	59	62	65	68	Residential	1300	34
Hanover Dr. SE	19th Ave. SE	Clearbrook Dr. SE	56	58	61	61	63	Residential	820	12
36th Ct. SE	Lakecrest Dr. SE	East End of Road	60	60	61	63	69	Residential	210	15
Stikes Dr. SE	Mullen Rd. SE	37th Ave. SE	57	57	60	59	60	Residential	750	13
Livingston Ct. NE	Livingston St. NE	End of Road	55	57	60	61	65	Residential	200	12
36th Ct. SE	Lakecrest Dr. SE	West End of Road	55	58	59	62	67	Residential	160	12
25th Ave. SE	Lilac St. SE	End of Road	51	54	57	58	61	Residential	480	10
17th Ave. SE	College St. SE	East End of Road	100	54	57	56	60	Residential	970	34
Homann Dr. SE	Lacey Elementary School	15th Ave. SE	57	57	57	58	58	Residential	1010	13
White Fir Dr. NE	Fairhill Dr. NE	Meridian Rd. NE	50	52	55	52	53	Residential	1580	9
Westminster Dr. NE	7th Ave. NE	End of Road	51	53	55	57	59	Residential	1020	10
30th Ave. SE	Hicks Lake Rd. SE	End of Road	48	52	53	52	64	Residential	620	8
13th Ct. SE	College St. SE	End of Road	40	30	31	34	39	Residential	280	5
Selma St. SE	Pacific Ave. SE	End of Road	29	30	30	29	31	Residential	520	1
Kenrick St. SE	50th Ave. SE	49th Ave. SE	100	100				Residential	470	34
Meadow Dr. SE	Trillium St. SE	Gate	100	100				Residential	145	34
49th Ave. SE	Boardwalk St. SE	Parkside Dr. SE	100	100				Residential	930	34
Parkside Dr. SE	53rd Ave. SE	49th Ave. SE	100	100				Residential	980	34
Evie St. SE	Andrew St. SE	49th Ave. SE	100	100				Residential	400	34
Hanna Dr. NE	Gladiator St. NE	Hercules Dr. NE	100	100				Residential	480	34

ROADWAY DEFECT DEFINITIONS

----- ----- ----- -----

The *Pavement Surface Condition Field Rating Manual for Asphalt Pavement* is the guide used to determine pavement defects and the severity of those defects. Written by the Northwest Pavement Management Association (NWPMA) and the Washington State Department of Transportation (WSDOT), the rating manual defines fourteen different types of defects with three levels of severity.

In Lacey's pavement management system, information is collected for the following defects:

- Rutting & Wear
- Alligator Cracking
- Longitudinal & Transverse Cracking
- Raveling & Weathering
- Patching
- Depressions & Distortions

Rutting & Wear


Rutting is a surface depression within the wheel path may be caused by heavy trucks, slow or stopping traffic, poor construction or moisture damage. When the upper pavement layers are rutted, the pavement along the edges of the rutted area may lift up.

Wear is surface depression in the wheel path resulting from tire abrasion.

Rating Severity:

In both cases, the overall severity is measured by the average observed depth of the rut, or wear depression.

Low	1/4 inch to 1/2 inch
Medium	1/2 inch to 3/4 inch
High	over 3/4 inch

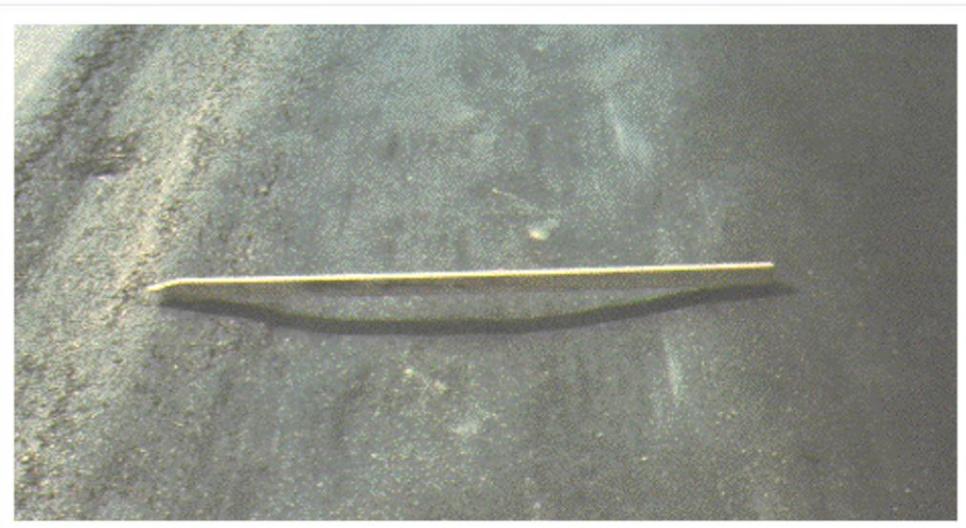

Alligator Cracking

Alligator Cracking is associated with loads and is usually limited to areas of repeated traffic loading. Generally, cracking of this type begins as a single longitudinal, discontinuous crack within the wheel path that progresses with time and loads to a more branched pattern that begin to interconnect. Eventually the cracks interconnect sufficiently to form many pieces, resembling the pattern of alligator hide.

Potholes and other occurrences of missing or destroyed pavement eventually accumulate as crack severity worsens.

Rating Severity:

Low	Branched, discontinuous thin cracks are beginning to interconnect and form the typical alligator pattern.
Medium	Cracking is interconnected and forms an alligator pattern. The cracks are wider with some spalling* along the edges, but the pavement pieces are still in place.
High	The alligator pattern is fully developed. Individual pieces of pavement may be loosened or even missing. Pumping* up through the cracks may be seen.

* See Glossary (pages 104-105)



Longitudinal & Transverse Cracking

Longitudinal Cracks run roughly parallel to the roadway center line. Longitudinal cracks associated with the beginning of alligator cracking are generally discontinuous and broken. They may be associated with loads, poorly constructed paving joints, or joints and cracks under the surface course.


Transverse Cracks run roughly perpendicular to the roadway center line. They may be due to surface shrinkage caused by low temperatures, hardening of the asphalt, or cracks in underlying pavement layers.

Rating Severity:


Low The cracks have very little or no spalling along the edges and are less than 1/4 inch wide ("hairline" cracks).

Medium Cracking is 1/4 inch wide or greater. There may be a few thin connecting or intersecting cracks near the main crack.

High Cracks are spalled and wide. Pieces are visibly missing along the crack.

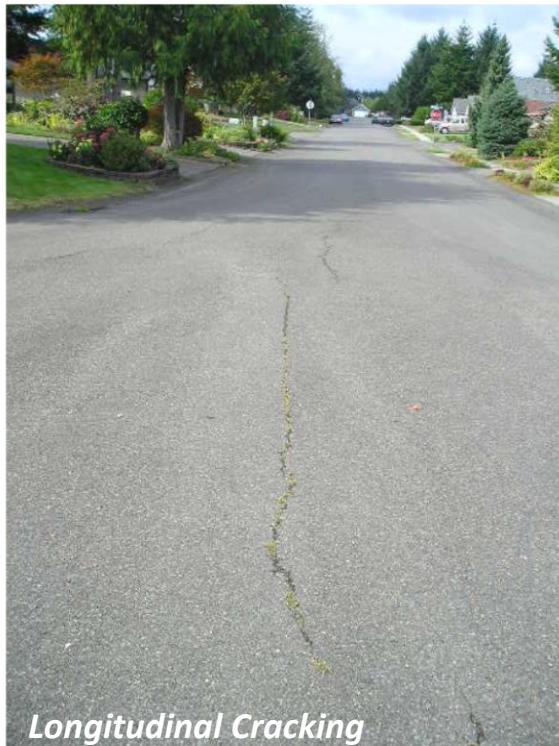

Longitudinal Cracking

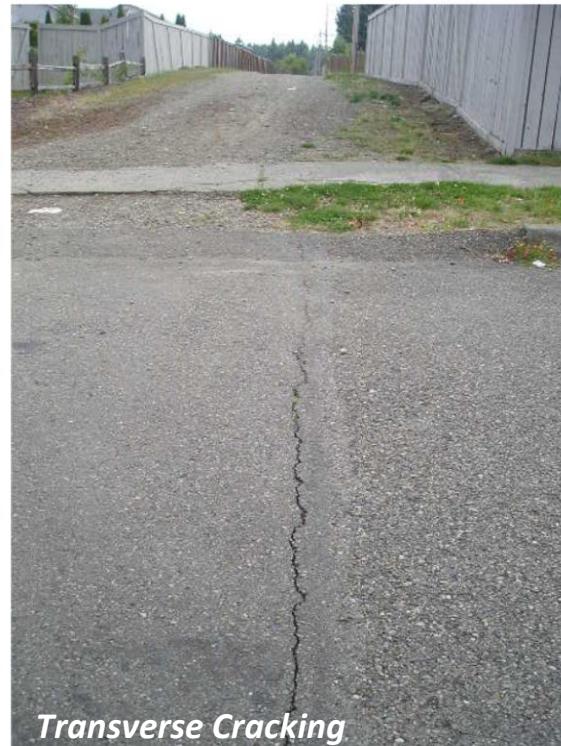

Transverse Cracking

Weathering

Weathering is the wearing away of the asphalt binder and fine aggregate. Pavement surface deterioration occurs due to oxidation, inadequate compaction, insufficient asphalt content, excessive natural sand, surface water erosion, and traffic. The pavement loses its smooth surface and begins to appear open and rough like very coarse sandpaper.

Rating Severity:

- | | |
|--------|---|
| Low | The asphalt surface is beginning to show signs of aging. The binder or fine aggregate is starting to wear away and may be accompanied by fading of the asphalt color. |
| Medium | The loss of fine aggregate is noticeable and the edges of the coarse aggregate are exposed up to 1/4 width (of the longest side). The surface texture is moderately rough and pitted. |
| High | There is considerable loss of fine aggregate and the edges of the coarse aggregate are exposed greater than 1/4 width (of the longest side). The surface texture is very rough and deeply pitted. |



Raveling

Raveling is the dislodging of coarse aggregate and it is caused by insufficient asphalt binder, poor mixture quality, inadequate compaction, segregation, or stripping. The pavement surface is rough and appears dimpled and pitted.

Rating Severity:

Medium The loss of coarse aggregate is considerable (greater than 20 pieces or clusters per square yard).

High The surface texture is very rough and pitted and may be completely removed in places.



Medium Severity



High Severity

Patching

A patch is an area of pavement which has been replaced with new material to repair the existing pavement or access utilities. Though they are a necessary part of repair work, patched areas generally don't perform as well as the original pavement section.

In general, patches are smaller than typical rehabilitation in size and scope. They are less than full roadway width and/or are less than project length. For each treatment it must be determined whether it would be more effective (and cost-effective) to apply patches throughout as needed, or to simply reconstruct the road.

Rating Severity:

- | | |
|--------|--|
| Low | Patch has at most low severity distress of any type. |
| Medium | Patch has medium severity distress of any type. |
| High | Patch has high severity distress of any type. |



Depressions & Distortions

These defects are localized low spots or elevated areas of the pavement that result from settlement, pavement shoving, displacement due to subgrade swelling, or displacement due to tree roots. These forms of surface distress occur in isolated areas of the road.

Rating Severity:

The severity is defined by as the maximum vertical deviation from a 10-foot straightedge placed on the pavement:

Low 1/8 inch to 2 inches per 10 feet.

Medium 2 inches to 4 inches per 10 feet.

High Over 4 inches per 10 feet.



GLOSSARY OF COMMON TERMS

Arterial	High-volume roadway intended for efficient movement of people and goods.
Collector	Roadway that connects commercial, industrial and residential streets to arterials or other collectors.
Distresses/ Defects	Visual pavement surface distress or pavement defects can be quantified and related to the life cycle of a given type of pavement or roadway under given traffic and weather conditions. Each distress is generally associated with a specific pavement property, such as aging, wearing, fatigue, or materials. These pavement surface defects can be distinguished and quantified visually by human or automated techniques.
Extent	Extent is the measure of area, length, or count associated with a given distress. It is how much and how far a given defect has progressed.
HMA	<u>Hot Mix Asphalt</u> . The most common type of flexible pavement surfacing in the U.S.
PCI	<u>Pavement Condition Index</u> . A value from 0 to 100 assigned to a given road section, calculated by deducting points for the extent and severity of noted defects. Serves as a comparative indicator of pavement condition.
PMS	<u>Pavement Management System</u> . “A systematic method for routinely collecting, storing, and retrieving the kind of decision-making information needed [about pavements] to make maximum use of limited maintenance [and construction] dollars.” - The American Public Works Association (APWA)
Pavement Preservation	“The timely application of carefully selected surface treatments to maintain or extend a pavement’s effective service life.”
Project	A project is the unit used to evaluate or group pavement elements. Projects are generally thought of as portions of roadway that could reasonably become funded improvement projects; however, they can be grouped together for various reasons. They generally consist of similar geometric data, such as pavement width, structure, and pavement type, or can be related to other needs, such as traffic volumes or planning needs.

Pumping	The forcing of base materials up through the cracks in the pavement by water.
Raveling	The loss of material from the pavement. This may involve only small amounts of fine aggregate and/or binder; or it may involve large pieces of the pavement at the edge of cracks or joints.
RSL	The <u>Remaining Service Life</u> of a pavement is the estimated number of years to the time when the pavement is providing substandard service quality. This value is calculated using the distress data and the pavement's rate of deterioration.
Severity	The definition of severity for a given defect varies with each distress and is generally a measure of how badly or to what extent a given defect has deteriorated. Examples are crack widths, crack deterioration, or spalling, and loss of materials.
Spalling	The deterioration of the sharp edge formed at the pavement surface along each side of a crack or joint. With severe spalling, pieces of the pavement break away, causing the visual size or width of the crack on the pavement surface to be irregular and wider than the crack width below the surface. Large spalls may extend to full depth.
Segment	A segment is generally a single block, 1/10th mile, or other relatively short, homogeneous unit of roadway. Several segments may be included in a single project. Smaller segment definitions provide greater flexibility in the growth and expansion of the pavement management system. These are generally the fundamental elements of the roadway network and thus the PMS database structure. All ratings are performed within each segment. All data within the PMS are linked or referenced to a given segment, and they are located in the segment or roadway by the distance or mile post along a given street or road.
Wheel Path	There are two wheel paths per traffic lane. If the lane is equally divided longitudinally down the middle, each half may be broadly considered one wheel path. Therefore, a two-lane roadway has four wheel paths.