



ADDENDUM NO. 1

TO THE PLANS, SPECIFICATIONS, PROPOSAL AND CONTRACT FOR THE CITY OF LACEY

LAKES ELEMENTARY FIRE FLOW

LACEY CONTRACT NO. PW 2024-16

TO ALL PLAN HOLDERS:

You are hereby notified of the following changes, revisions, deletions, additions, corrections and/or clarifications to the plans, specifications, and contract documents for the *Lakes Elementary School Fire Flow* project. This addendum is made part of these contract documents as though it was originally included in the Contract. The Contractor shall note the location of the Addenda Receipt Acknowledgement on Page B-3 of the Contract Proposal.

Issued this 17th day of March 2026.

ADDITIONS, MODIFICATIONS, AND/OR DELETIONS TO THE PLANS AND SPECIFICATIONS

ITEM NO. 1:

Plan Sheet G2 (3 of 11)


Revise note 10 on the Temporary Erosion & Sediment Control plan sheet G2 (3 of 11) to identify City provided access route and material storage area.

ITEM NO. 2:

Specifications Page B-1

Replace page B-1 with the attached sheet, revising the quantity of bid item A20, "Hydrant Assembly", from 1 to 2.

Scott Egger, P.E.
Public Works Director

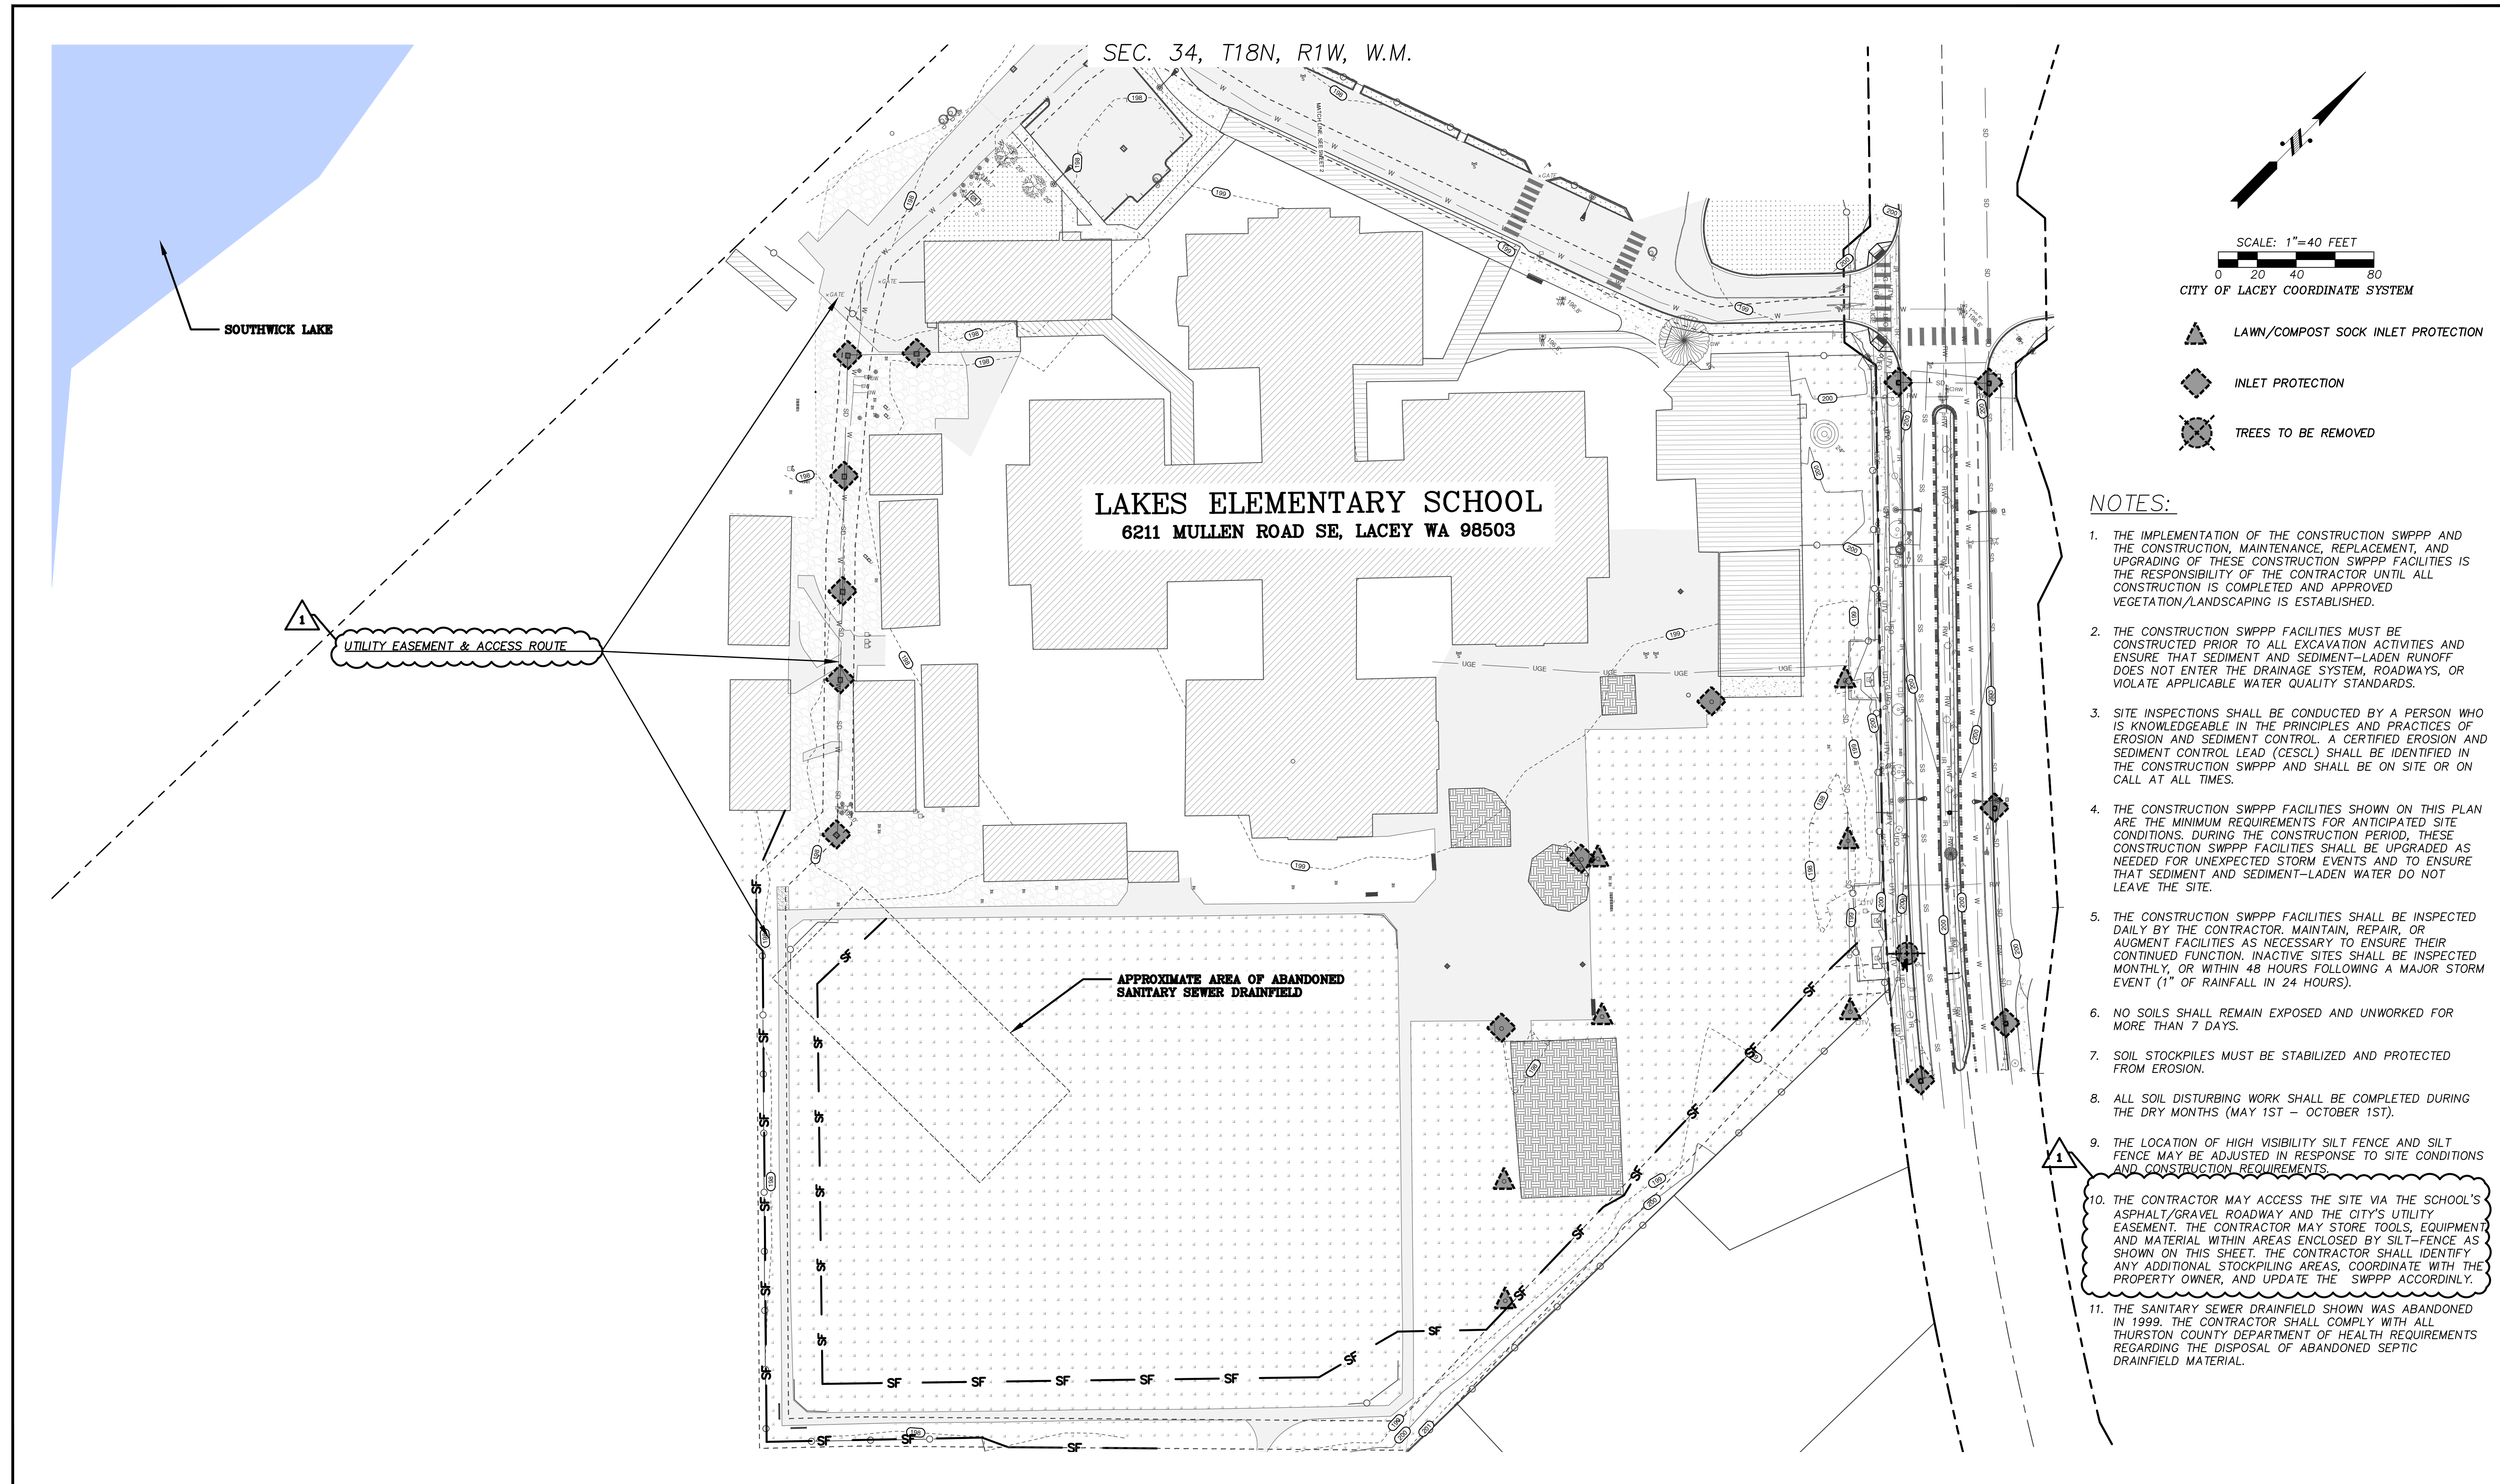

- NOTES:**
1. THE IMPLEMENTATION OF THE CONSTRUCTION SWPPP AND THE CONSTRUCTION, MAINTENANCE, REPLACEMENT, AND UPGRADING OF THESE CONSTRUCTION SWPPP FACILITIES IS THE RESPONSIBILITY OF THE CONTRACTOR UNTIL ALL CONSTRUCTION IS COMPLETED AND APPROVED VEGETATION/LANDSCAPING IS ESTABLISHED.
 2. THE CONSTRUCTION SWPPP FACILITIES MUST BE CONSTRUCTED PRIOR TO ALL EXCAVATION ACTIVITIES AND ENSURE THAT SEDIMENT AND SEDIMENT-LADEN RUNOFF DOES NOT ENTER THE DRAINAGE SYSTEM, ROADWAYS, OR VIOLATE APPLICABLE WATER QUALITY STANDARDS.
 3. SITE INSPECTIONS SHALL BE CONDUCTED BY A PERSON WHO IS KNOWLEDGEABLE IN THE PRINCIPLES AND PRACTICES OF EROSION AND SEDIMENT CONTROL. A CERTIFIED EROSION AND SEDIMENT CONTROL LEAD (CESCL) SHALL BE IDENTIFIED IN THE CONSTRUCTION SWPPP AND SHALL BE ON SITE OR ON CALL AT ALL TIMES.
 4. THE CONSTRUCTION SWPPP FACILITIES SHOWN ON THIS PLAN ARE THE MINIMUM REQUIREMENTS FOR ANTICIPATED SITE CONDITIONS. DURING THE CONSTRUCTION PERIOD, THESE CONSTRUCTION SWPPP FACILITIES SHALL BE UPGRADED AS NEEDED FOR UNEXPECTED STORM EVENTS AND TO ENSURE THAT SEDIMENT AND SEDIMENT-LADEN WATER DO NOT LEAVE THE SITE.
 5. THE CONSTRUCTION SWPPP FACILITIES SHALL BE INSPECTED DAILY BY THE CONTRACTOR. MAINTAIN, REPAIR, OR AUGMENT FACILITIES AS NECESSARY TO ENSURE THEIR CONTINUED FUNCTION. INACTIVE SITES SHALL BE INSPECTED MONTHLY, OR WITHIN 48 HOURS FOLLOWING A MAJOR STORM EVENT (1" OF RAINFALL IN 24 HOURS).
 6. NO SOILS SHALL REMAIN EXPOSED AND UNWORKED FOR MORE THAN 7 DAYS.
 7. SOIL STOCKPILES MUST BE STABILIZED AND PROTECTED FROM EROSION.
 8. ALL SOIL DISTURBING WORK SHALL BE COMPLETED DURING THE DRY MONTHS (MAY 1ST - OCTOBER 1ST).
 9. THE LOCATION OF HIGH VISIBILITY SILT FENCE AND SILT FENCE MAY BE ADJUSTED IN RESPONSE TO SITE CONDITIONS AND CONSTRUCTION REQUIREMENTS.
 10. THE CONTRACTOR MAY ACCESS THE SITE VIA THE SCHOOL'S ASPHALT/GRAVEL ROADWAY AND THE CITY'S UTILITY EASEMENT. THE CONTRACTOR MAY STORE TOOLS, EQUIPMENT AND MATERIAL WITHIN AREAS ENCLOSED BY SILT-FENCE AS SHOWN ON THIS SHEET. THE CONTRACTOR SHALL IDENTIFY ANY ADDITIONAL STOCKPILING AREAS, COORDINATE WITH THE PROPERTY OWNER, AND UPDATE THE SWPPP ACCORDINGLY.
 11. THE SANITARY SEWER DRAINFIELD SHOWN WAS ABANDONED IN 1999. THE CONTRACTOR SHALL COMPLY WITH ALL THURSTON COUNTY DEPARTMENT OF HEALTH REQUIREMENTS REGARDING THE DISPOSAL OF ABANDONED SEPTIC DRAINFIELD MATERIAL.

CITY OF LACEY, WASHINGTON
 DEPARTMENT OF PUBLIC WORKS
 420 COLLEGE STREET SE
 LACEY, WA 98503-1238 (360) 491-5600



DESIGNED: RKJ
 DRAFTED: RKJ
 CHECKED: TEO
 HORZ. SCALE: 1"=40'
 VERT. SCALE: N/A
 FILE: TBC

**LAKES ELEMENTARY FIRE FLOW
 TEMPORARY EROSION & SEDIMENT
 CONTROL PLAN**

REVISION BLOCK		
NO.	DATE	DESCRIPTION
1	3/17/26	ACCESS & STORAGE CLARIFICATION

PAGE NO.	SHEET NO.
G2	3
DWG NO.	OF
D-24-21	11

CITY OF LACEY

Lakes Elementary Fire Flow

Addendum No. 1

Lacey Contract Number: PW 2024-16

Federal Aid Project Number:

WSDOT Contract Number:

TIB Contract Number:

Contract Proposal

DATE: _____

The undersigned, as bidder, has examined the bid documents as prepared by the Public Works Department, City of Lacey.

The undersigned, as bidder, proposes to furnish all material and perform all labor in accordance with the bid documents at the following prices.

Bidder must fill in unit prices in figures for each item and total.

Bidder shall sign this proposal form and submit all required paperwork with the bid.

A Water

No.	Quantity	Unit	Item ID	Item Description	Unit Price	Extended Price
A1	35000	MC	104-010	Minor Change	\$1.00	\$35,000.00
A2	1	LS	109-010	Mobilization	LUMP SUM	
A3	1	LS	110-010	Project Temporary Traffic Control	LUMP SUM	
A4	80	HR	110-040	Flaggers		
A5	850	HR	110-070	Portable Changeable Message Sign		
A6	1	LS	202-510	Removal of Structures and Obstructions	LUMP SUM	
A7	1	LS	205-510	Trench Safety System	LUMP SUM	
A8	16	CY	209-080	Controlled Density Fill		
A9	1	FA	214-506	Dewatering	\$5,000.00	\$5,000.00
A10	115	TN	404-020	Crushed Surfacing Top Course		
A11	78	TN	504-011	HMA Cl. 1/2" PG 58H-22		
A12	45	SY	504-200	Planing Bituminous Pavement		
A13	110	TN	708-610	Bank Run Gravel for Trench Backfill		
A14	560	TN	708-620	Imported Pipe Bedding		
A15	8	HR	708-810	Utility Potholing		
A16	1100	LF	709-508	8 Inch Water Main		
A17	2	EA	709-950	Connect to Existing Water Main		
A18	3	EA	712-508	8 Inch Gate Valve		
A19	2	EA	712-512	12 Inch Gate Valve		
A20	2	EA	714-510	Hydrant Assembly		
A21	1500	LF	801-120	High Visibility Silt Fence		